


## GaAs MMIC Double Balanced Mixer

## MM1-1453HSM

### 1. Device Overview

#### 1.1 General Description

The MM1-1453HSM is a high frequency GaAs MMIC double balanced mixer that features excellent conversion loss, superior isolations and spurious performances across a broad bandwidth. MM1-1453HSM works well as both an up and down converter in the K/Ka band and is recommend for moderate power applications that demand high linearity. If a lower LO drive is required, the MM1-1453LSM offers similar specs in the same surface mount package. The MM1-1453HSM is available in a 4x4 mm QFN package. Evaluation boards are also available. For a list of recommended LO driver amps for all mixers and IQ mixers, see [here](#).




#### 1.2 Features

Parameter	Typical
RF/LO response	14GHz - 53GHz
IF response	DC – 22 GHz
Conversion Loss	7 dB
LO to RF Isolation	52 dB

#### 1.3 Applications

- Test and measurement equipment
- SATCOM
- Radar
- mmWave Tuner Mixer
- 5G

#### 1.4 Functional Block Diagram

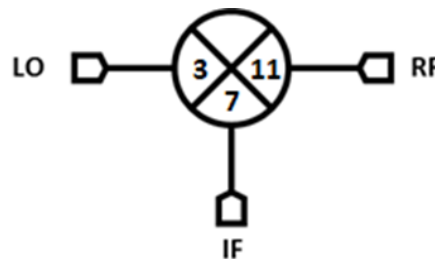

#### 1.5 Part Ordering Options<sup>1</sup>

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MM1-1453HSM-2	4x4 mm QFN	SM	RoHS	Active	EAR99
EVAL-MM1-1453H	Connectorized Evaluation Fixture	Eval		Active	EAR99

<sup>1</sup> Refer to our [website](#) for a list of definitions for terminology presented in this table.

## Table of Contents

1. Device Overview .....	1	3.5 Electrical Specifications .....	5
1.1 General Description .....	1	3.6 Typical Performance Plots .....	6
1.2 Features .....	1	3.6.1 Typical Performance Plots: IP3 ..	8
1.3 Applications .....	1	3.6.2 Typical Performance Plots: LO	
1.4 Functional Block Diagram .....	1	Harmonic Isolation.....	9
1.5 Part Ordering Options.....	1	3.6.3 Typical Spurious Performance:	
2. Port Configurations and Functions .....	3	Down-Conversion .....	10
2.1 Port Diagram .....	3	3.6.4 Typical Spurious Performance: Up-	
2.2 Port Functions .....	3	Conversion .....	11
3. Specifications .....	4	4. Operation.....	12
3.1 Absolute Maximum Ratings.....	4	4.1 Ports Operation .....	12
3.2 Package Information .....	4	5. Mechanical Data .....	13
3.3 Recommended Operating Conditions .	4	5.1 SM Package Outline Drawing .....	13
3.4 Sequencing Requirements .....	4	5.2 SM Package Footprint .....	13
		5.3 Evaluation Board Outline Drawing...	14


### Revision History

Revision Code	Revision Date	Comment
-	May 2020	Datasheet Initial Release
A	September 2020	Updated Pin Designations, Tuner Plot Units & Outline Drawings





## 2. Port Configurations and Functions

### 2.1 Port Diagram

A bottom-up view of the MM1-1453HSM's SM package outline drawing is shown below. The MM1-1453HSM has the input and output ports given in Port Functions. The MM1-1453HSM can be used in either an up or down conversion. For configuration A, input the LO into pin 3, use pin 11 for the RF, and pin 7 for the IF. For configuration B, input the LO into pin 11, use pin 3 for the RF, and pin 7 for the IF.

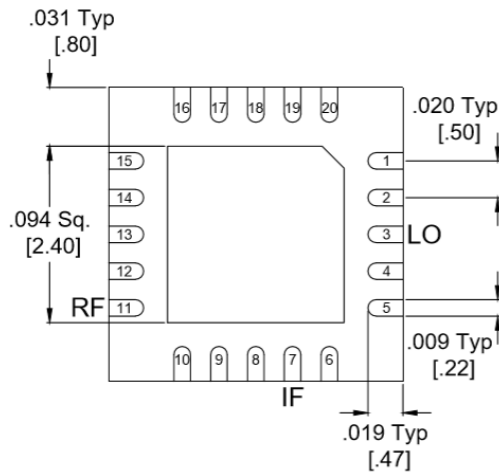

### 2.2 Port Functions

Port	Function	Description	Equivalent Circuit for Package
Pin 3	LO (Configuration A) RF (Configuration B)	Pin 3 is DC open and AC matched to 50 Ohms from 14 to 53 GHz.	
Pin 7	IF	Pin 7 is DC coupled to the diodes. Blocking capacitor is optional.	
Pin 11	RF (Configuration A) LO (Configuration B)	Pin 11 is DC open and AC matched to 50 Ohms from 14 to 53 GHz.	
GND	Ground	SM package ground path is provided through the ground paddle.	

### 3. Specifications

#### 3.1 Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Units
Pin 3 DC Current	N/A	mA
Pin 7 DC Current	30	mA
Pin 11 DC Current	N/A	mA
Power Handling, at any Port	+30	dBm
Operating Temperature	-55 to +100	°C
Storage Temperature	-65 to +125	°C

#### 3.2 Package Information

Parameter	Details	Rating
ESD	Human Body Model (HBM), per MIL-STD-750, Method 1020	1A
Weight	EVAL package	33.5 g

#### 3.3 Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

	Min	Nominal	Max	Units
T <sub>A</sub> , Ambient Temperature	-55	+25	+100	°C
LO Input Power	+12		+20	dBm

#### 3.4 Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

### 3.5 Electrical Specifications








The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +15dBm sine wave LO input. Specifications shown for configuration A (B).






Parameter		Test Conditions	Min	Typical	Max	Units
RF (Pin 11) Frequency Range			14		53	GHz
LO (Pin 3) Frequency Range			14		53	
I (Pin 7) Frequency Range			0		22	
Conversion Loss (CL) <sup>2</sup>		RF/LO = 14 - 50 GHz I = 91 MHz		7 (8)	13 (14)	dB
		RF/LO = 50 - 53 GHz I = 91 MHz		12 (12)	14 (14)	
Noise Figure (NF) <sup>3</sup>		RF/LO = 14 - 53 GHz I = 91 MHz		8		dB
Isolation	LO to RF	RF/LO = 14 - 53 GHz		52		dB
	LO to IF	IF/LO = 14 - 53 GHz		36		
	RF to IF	RF/IF = 14 - 53 GHz		48		
Input IP3 (IIP3)		RF/LO = 14 - 53 GHz I = 91 MHz		+17 (+19)		dBm
Input 1 dB Gain Compression Point (P1dB)				+8 (+9)		dBm

<sup>2</sup> Measured as a down converter to a fixed 91MHz IF.







<sup>3</sup> Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

### 3.6 Typical Performance Plots

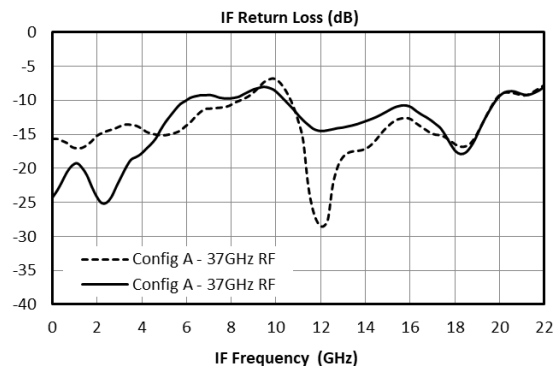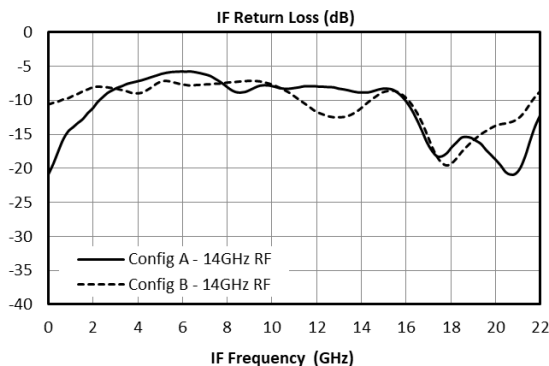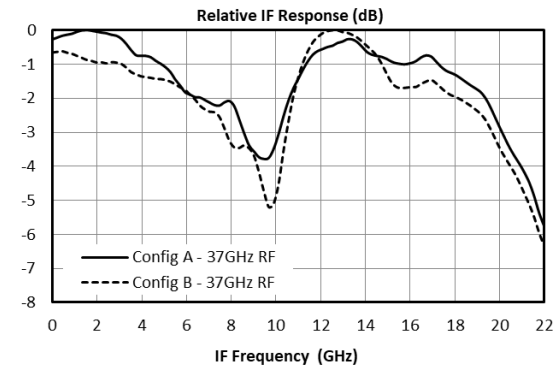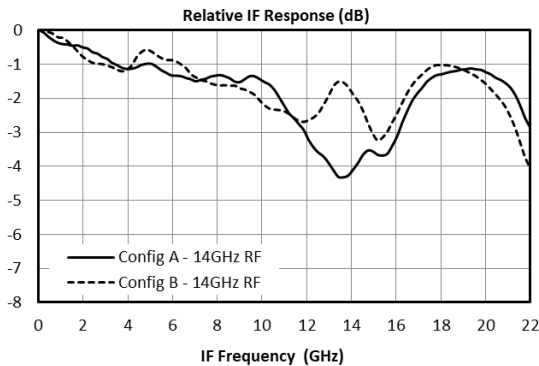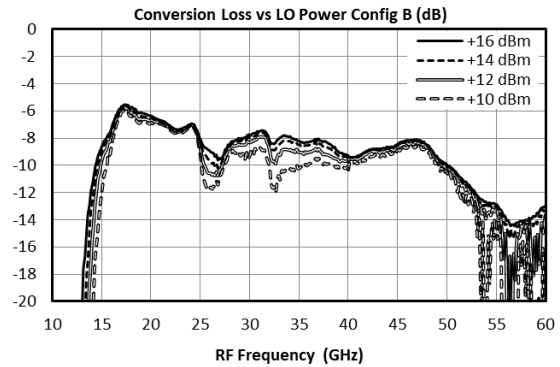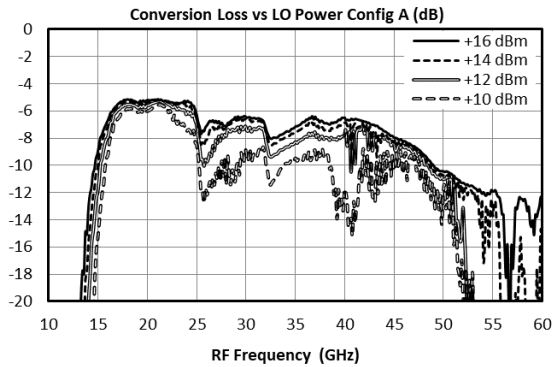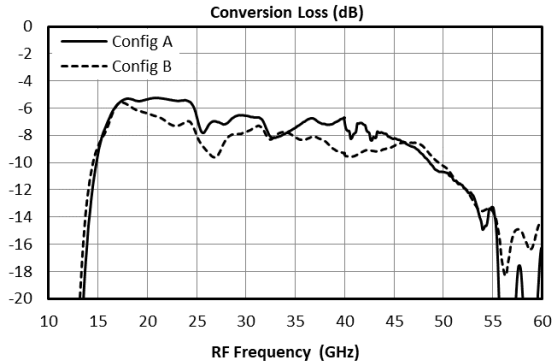


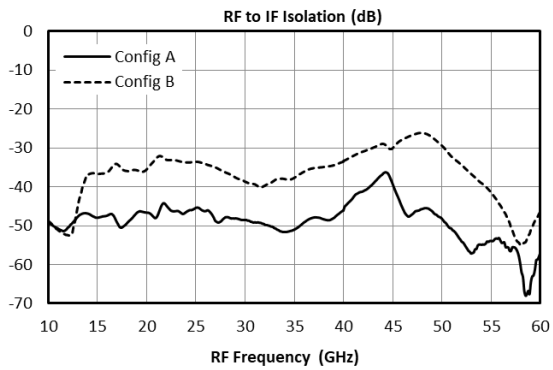
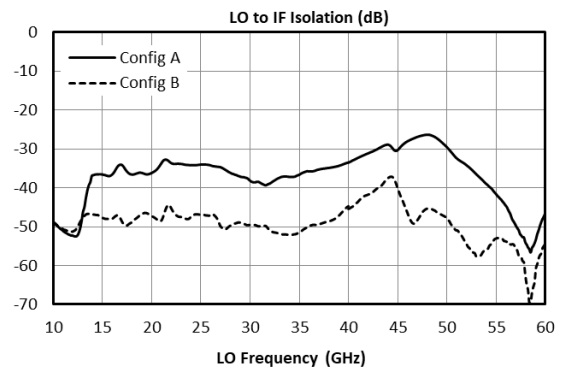
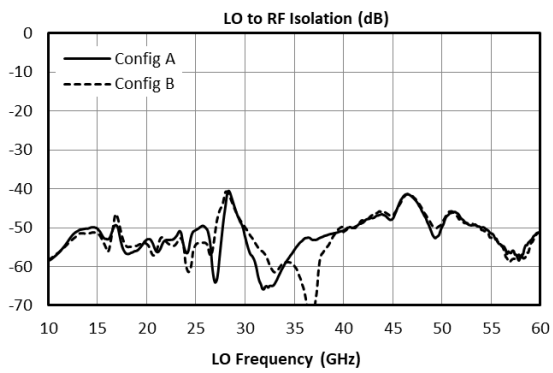
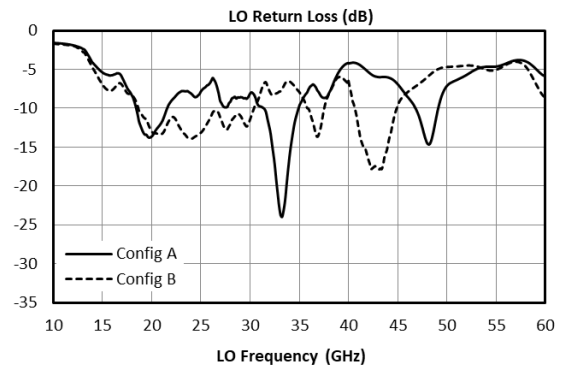
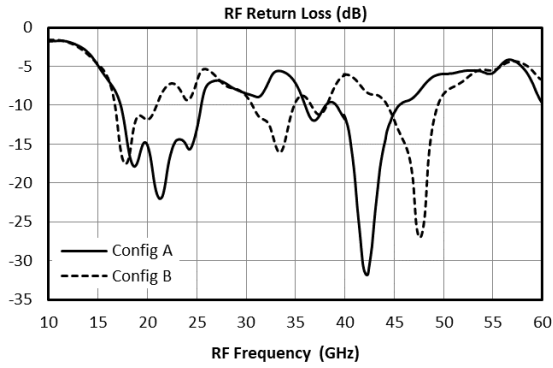


### 3.6.1 Typical Performance Plots: IP3

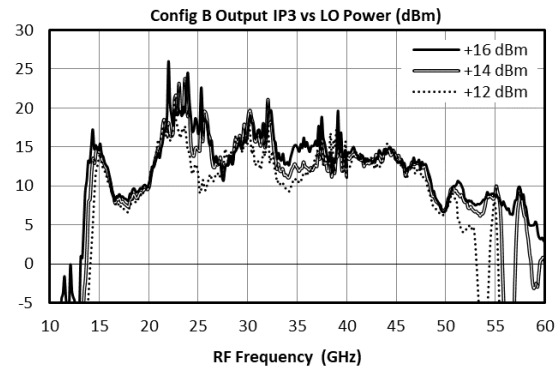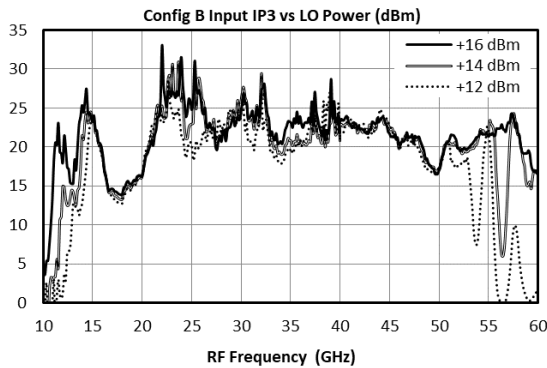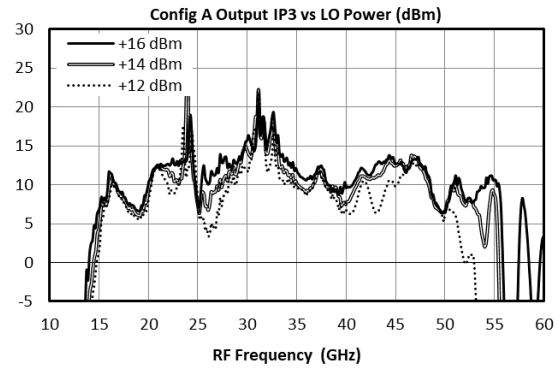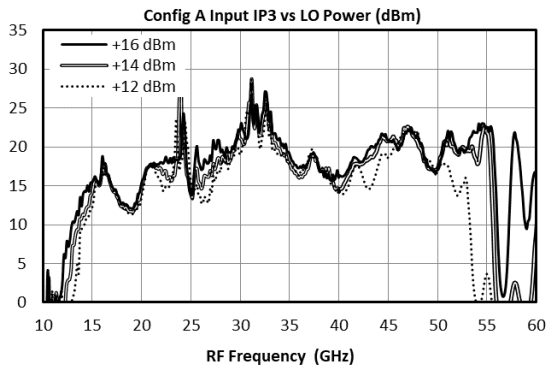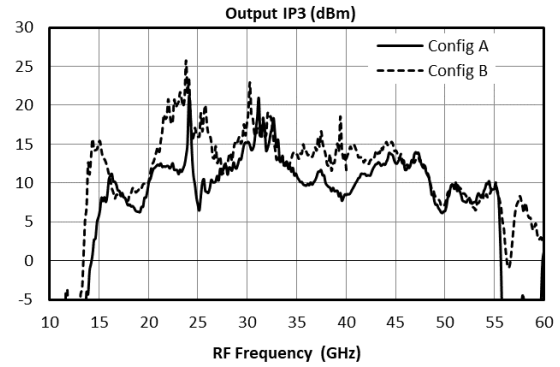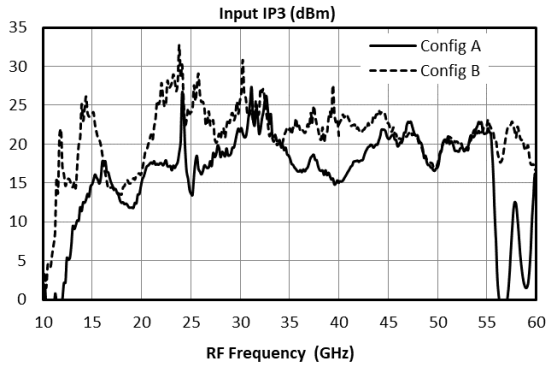







### 3.6.2 Typical Performance Plots: LO Harmonic Isolation

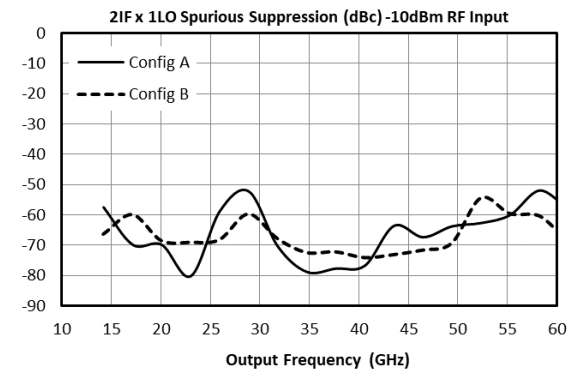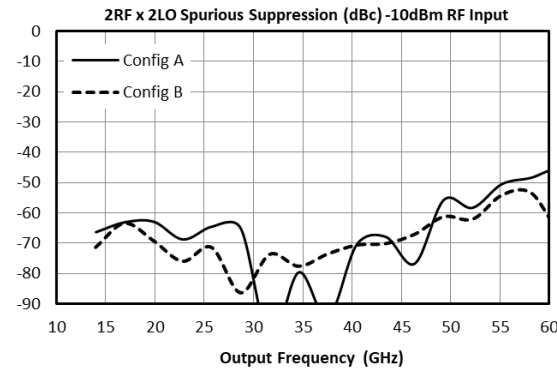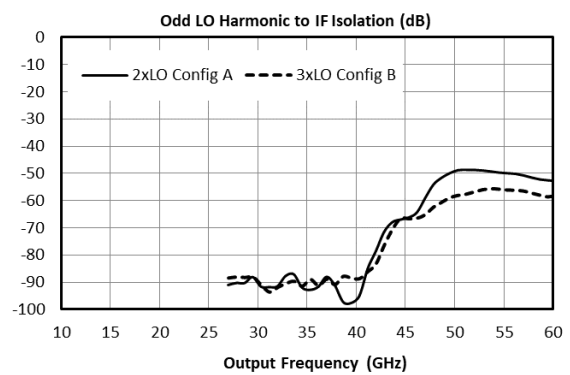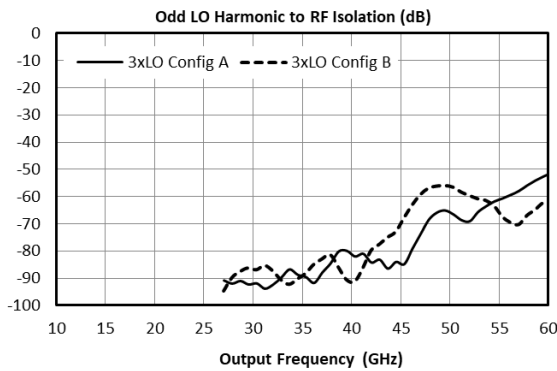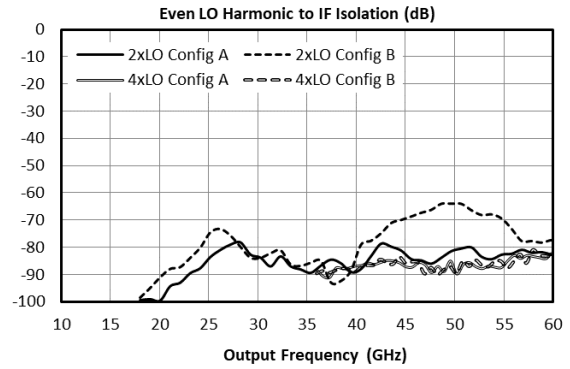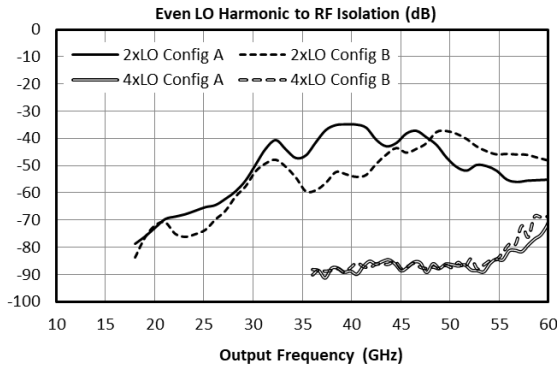

### 3.6.3 Typical Spurious Performance: Tuner Mixer

Tuner mixer performance plots are taken with the following test conditions and frequency plan:

Parameter	Start	Nominal	Stop	Units
IF Input Frequency	0		24	GHz
IF Input Power		-10		dBm
LO Input Frequency	24		48	GHz
LO Input Power		+15		dBm
RF Output Frequency		24		GHz

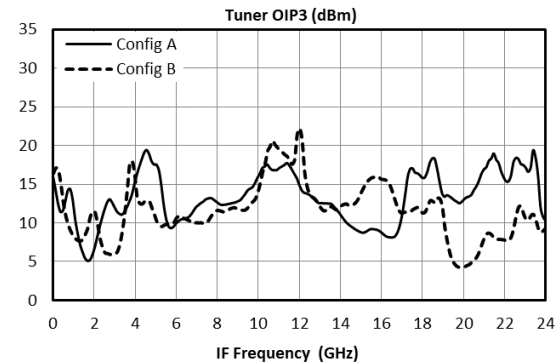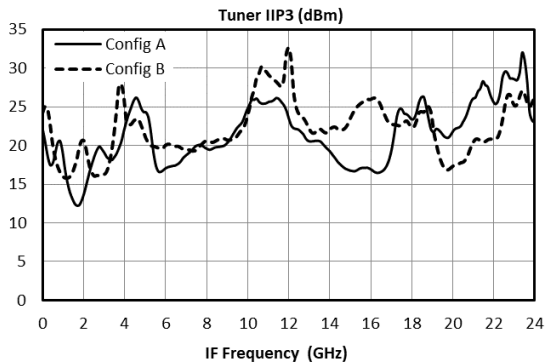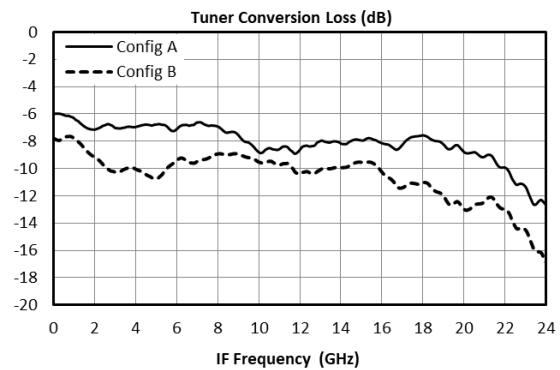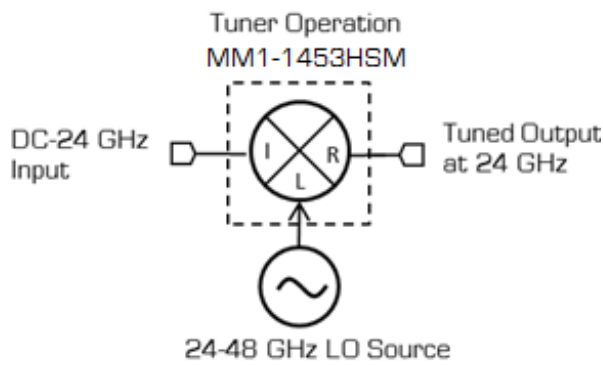

### 3.6.4 Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ( $\pm m \cdot LO \pm n \cdot RF$ ) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by  $(n-1)$ , where "n" is the RF spur order. For example, the  $2RF \times 2LO$  spur is 68 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is  $(2-1) \times (-10 \text{ dB})$  lower, or 78 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.  $mLO \times nRF$  plots can be found in section 3.6.2 Typical Performance Plots: LO Harmonic Isolation.  $0LO \times 1RF$  plot is identical to the plot of LO-RF isolation.

**Typical Down-conversion spurious suppression (dBc): Config A (B)**

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	41 (26)	Reference	40 (36)	28 (23)	45 (35)	N/A
2xRF	95 (95)	54 (59)	68 (71)	59 (66)	67 (74)	63 (69)
3xRF	91 (92)	61 (62)	85 (85)	64 (73)	83 (85)	61 (66)
4xRF	125 (124)	83 (92)	101 (112)	96 (110)	106 (104)	104 (110)
5xRF	N/A	95 (135)	124 (113)	105 (115)	129 (127)	106 (120)

### 3.6.5 Typical Spurious Performance: Up-Conversion

Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ( $\pm m \cdot LO \pm n \cdot IF$ ), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by  $(n-1)$ , where "n" is the IF spur order. For example, the  $2IF \times 1LO$  spur is typically 70 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is  $(2-1) \times (-10 \text{ dB})$  lower, or 80 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

**Typical Up-conversion spurious suppression (dBc): Config A (B)**

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	40 (25)	Reference	40 (35)	20 (18)	44 (35)	N/A
2xIF	59 (65)	70 (69)	60 (63)	71 (69)	58 (62)	65 (76)
3xIF	86 (84)	62 (64)	81 (77)	58 (57)	79 (72)	53 (57)
4xIF	103 (108)	107 (107)	102 (103)	106 (100)	93 (105)	104 (109)
5xIF	120 (118)	104 (105)	119 (115)	99 (96)	110 (106)	98 (103)

## 4. Operation

### 4.1 Ports Operation

**IF Port** – Used as input on an upconversion, output on downconversion, or LO port in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads. Blocking capacitor is recommended if DC voltage is present on the line.

**RF Port** – Used as input on a downconversion, output on upconversion, or output in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.


**Filtering and Matching-** Filtering is generally desired for spurious and image removal on the output port of the mixer. Reflective filters can cause out of band signals to reflect back into the mixer and cause conversion loss ripple, erroneous spurs, and other undesired behaviors. To eliminate these problems it is recommended that the filters be placed as close to the output port as possible. If undesired behavior is still observed, a diplexer with one port terminated or a 1-3 dB attenuator may reduce this problem.

**RF Ground** – The ground paddle of the QFN should be connected to a low noise RF ground with very low electrical resistance for high frequency operation.

**LO Port** – The noise floor of the LO input signal should be less than the value of the noise floor plus isolation of the mixer, or a filter is recommended to prevent reduction in dynamic range. An LO amplifier is required if the LO power is below the recommended drive level. It is important to use an amplifier with a broadband 50 ohm match such that it does not reflect spurious signals back into the mixer or other system circuitry.


## 5. Mechanical Data

### 5.1 SM Package Outline Drawing

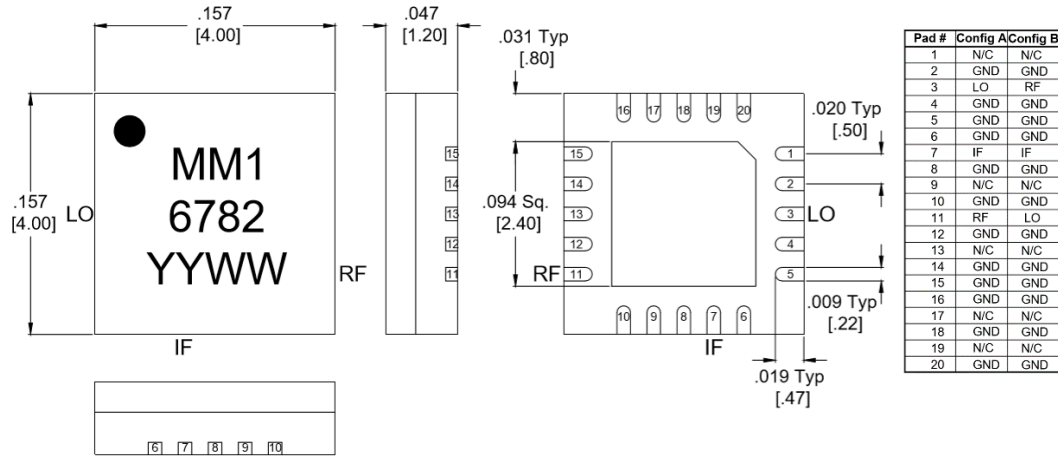

- Substrate material is LCP.
- I/O Leads and Ground Paddle plating is (from base to finish):
  - Ni: 0.5um MIN
  - Pd: 0.08um MIN
  - Au 0.05um MAX
- All unconnected pads should be connected to PCB RF ground.


### 5.2 SM Package Footprint

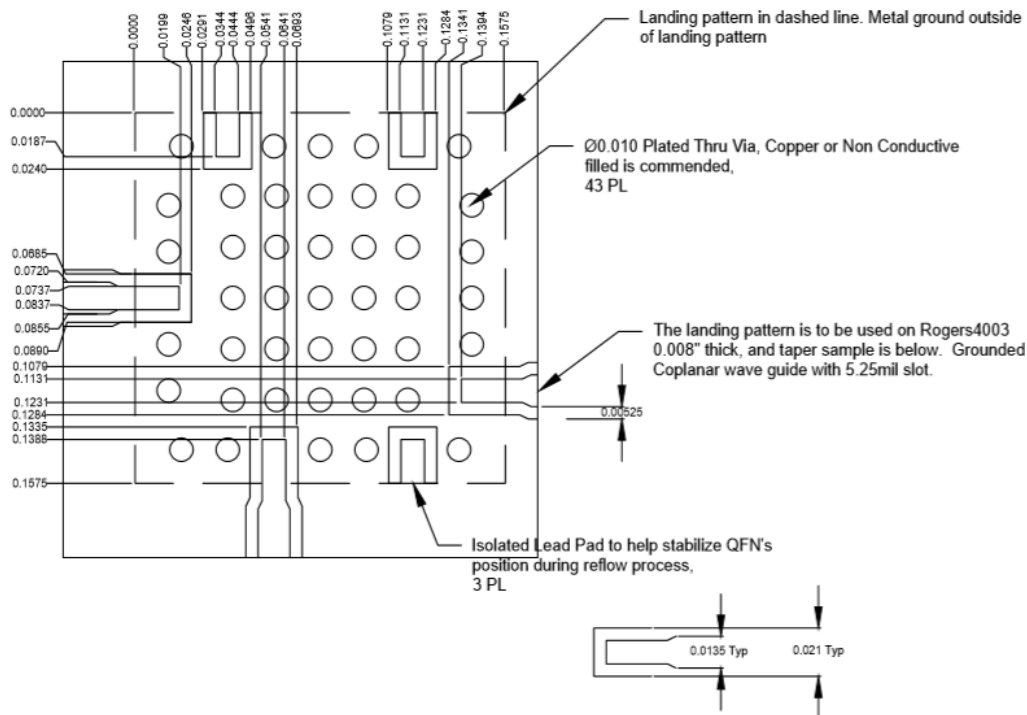

QFN-Package Surface-Mount Landing Pattern

[Click here for a DXF of the above layout.](#)  
[Click here for leaded solder reflow.](#) [Click here for lead-free solder reflow.](#)

### 5.3 Evaluation Board Outline Drawing

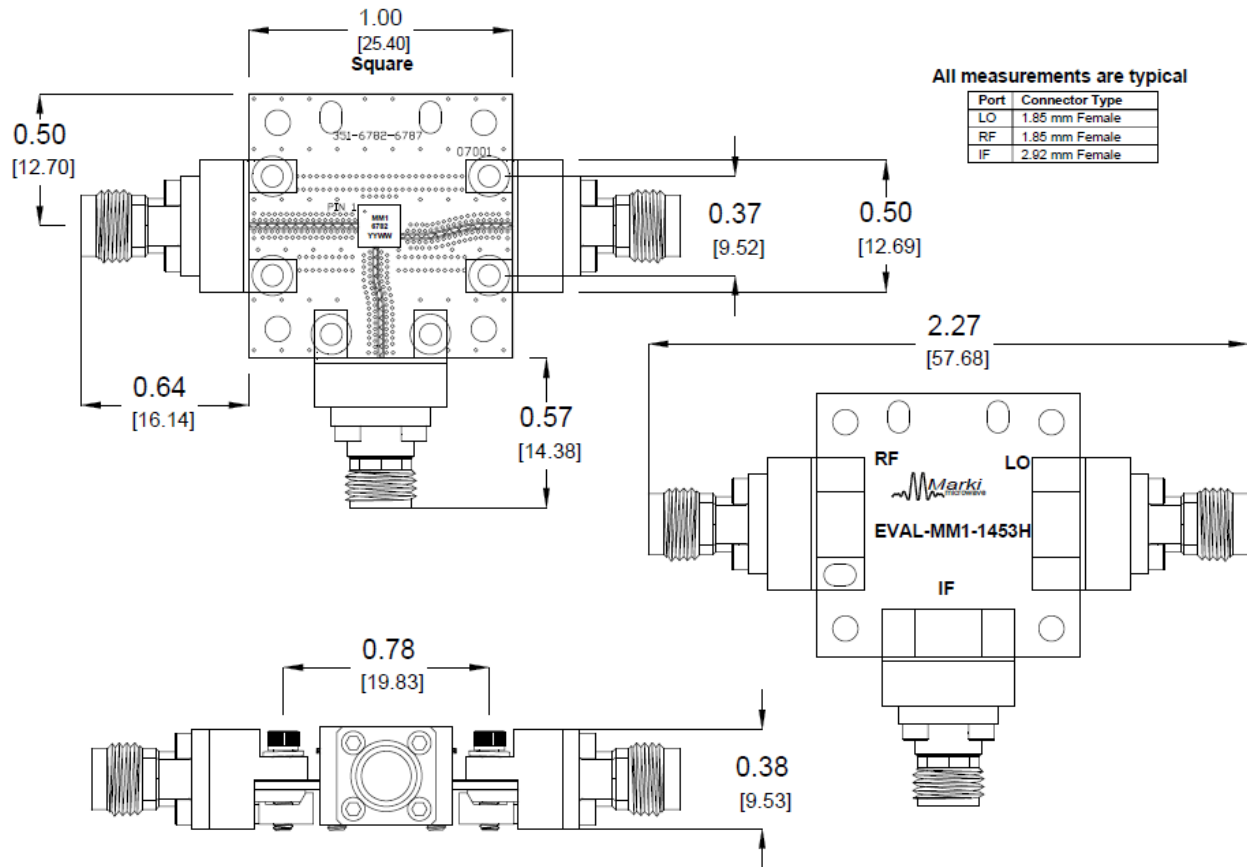

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice.

Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.