

XFA

TUNABLE FILTER WITH FIXED BANDWIDTH



The XFA is electronically controlled and wavelength tuning ranges from 1450 nm to 1650 nm. The bandwidth is factory-set and can be selected at purchase between 50 pm and 800 pm with respect to the center wavelength.

KEY FEATURES

Fixed Bandwidth Flat-top Filter

Ultra-sharp Filter Edges

High Isolation

200 nm Wavelength Range

High Accuracy & Repeatability

Easy-to-Use Software


SPEC SHEET

EXFO

KEY FEATURES

Fixed Bandwidth Flat-top Filter

The bandwidth of the XFA filters can be selected at purchase between 50 pm and 800 pm. The filter has a flat-top profile with minimal ripple, less than 0.2 dB.

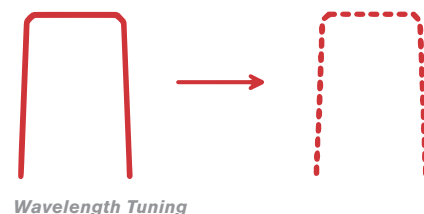

Wavelength Tuning

Ultra-sharp Filter Edges

The XFA uses EXFO patented quadruple pass technology. This creates extremely sharp filter edges with slopes of 500 dB/nm. Single or groups of narrowly spaced DWDM channels or coherent super-channels can be selected with ease.

High Isolation

In addition to the sharp filter edges, the quadruple pass technology achieves higher isolation than conventional double-pass filters. Isolation is typically 60 dB.

High Accuracy & Repeatability


High resolution translation stages are used for wavelength control. This ensures the XFA can be set accurately and repeatedly over time.

200 nm Wavelength Range

The XFA has a very wide wavelength range and covers the key telecom wavelengths from 1450 nm to 1650 nm.

Easy-to-Use Software

The XFA is operated through its 7-inch touch screen to drive all operations. It enables fast setup with a complete set of functions such as sequence execution, ITU Grid selection, custom grid generation.

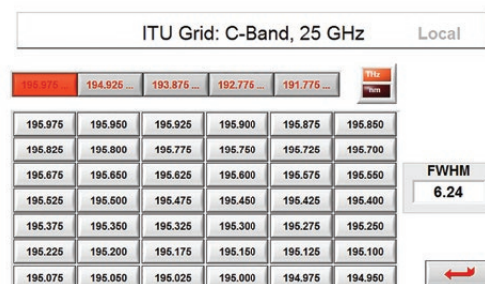

XFA - ITU Grid Selection

APPLICATION

DWDM Channel Selection

Low dispersion, steep edges and high isolation mean that DWDM channels, or even coherent superchannels with spacing down to 10 GHz, can be separated with ease. BER tests have never been so good!

Variable OSNR Source

A variable OSNR source typically consists of an ASE source combined with a variable attenuator. Adding the XFA with a flat-top bandwidth enables consistent noise loading for all DWDM wavelengths.

R&D of Modulation Formats

The XFA is perfect for the filtering and analysis of sub-bands of complex modulations formats.

Pulse Shaping

Wide bandwidth flexibility enables the filter to be used for pulse shaping of femtosecond lasers.

SPECIFICATIONS

Optical Characteristics	XFA
Wavelength range	1450-1650 nm
Wavelength resolution	1 pm
Wavelength accuracy ^a	±30 pm
Insertion loss ^{b, c}	5 dB (4.5 dB typical)
Polarization dependent loss ^{c, d}	±0.2 dB
Wavelength tuning speed	1 s
Optical Bandwidth (FWHM) (selected at order time)	
Minimum bandwidth (FWHM)	50 pm
Maximum bandwidth (FWHM)	800 pm
FWHM accuracy	±10 pm
Optical Bandwidth Shape	
Out-of-band suppression (crosstalk) ^e	40 dB (60 dB typical)
Flatness ^f	0.2 dB
Filter edge roll-off ^g	500 dB/nm typical
Interfaces	
Display	7 inch resistive touch-screen (res. 800x480)
Communication interfaces	USB-B, Ethernet (x2), RS-232C, GPIB ^h
Display and other interfaces	DVI-I (x1), USB 2.0-A (x4), PS/2 (x2)
Optical fiber type	SMF or PMF
Connector type	FC/PC or FC/APC
Operating Conditions	
Temperature range	15 to 35 °C
Maximum optical input power	30 dBm
Power Supply	100-240 V (50-60 Hz)
Size	
Dimensions (W x D x H)	254 x 385 x 154 mm
Weight	7 kg

All specifications are given at 21°± 3°C after 30 minutes warm-up.

Notes


- a. With "Backlash Suppression" setting enabled.
- b. From 1500 to 1600 nm & FWHM > 60 pm.
- c. At lowest FWHM the insertion loss is 7 dB typical.
- d. At 1500, 1550 and 1600 nm, FWHM > 100 pm.
- e. Measured 1 nm away from the -3 dB points.
- f. Centered width of FWHM-150 pm. For 150 pm < FWHM < 650 pm.
- g. Between -3 and -40 dB for FWHM < 800 pm.
- h. GPIB is supported as an option through an external RS-232/GPIB converter.





ADVANCED FEATURES & PERFORMANCE

Easy access to optical connectors for cleaning. Easing maintenance and enabling the lowest losses to be maintained.

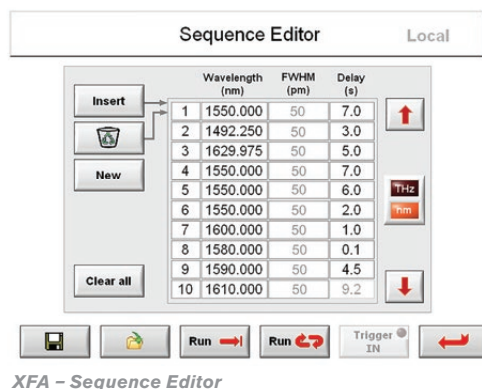

ORDERING INFORMATION

XFA-SCL-XX-XX-XX

Model

50-800 = Any value rounded to 10pm in the range 50 - 800 pm

Output fiber

00 = SMF28 singlemode fiber

M = PM15 polarization maintaining fiber

Connector

50 = FC/PC

58 = FC/APC

Example: XFA-SCL-200-M-58

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.