

'Pocket' Soil Moisture Meter

PAL-Soil

Cat. No.4571

Measurement method in accordance with ISO 16586:2003 "Soil quality – Determination of soil water content as a volume fraction on the basis of known dry bulk density – Gravimetric."



Construction


Irrigation

Save on time, labor, and material with PAL-Soil.

A measurement only takes 10 minutes
whether out in the fields or in the lab.

Measurement Method

1 Gravimetric Measurement

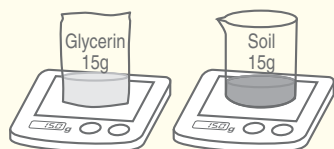

Measure out an equal amount each of soil and glycerin.

Volumetric Measurement


(1) Measure out 50ml of soil, using a sand-pouring cylinder or soil sampler.



(2) Measure out 30ml of glycerin and place it in a re-sealable plastic bag.



2

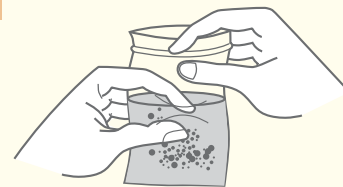

Mix the soil and glycerin thoroughly.

3



Place filter paper on the prism and place the soil-glycerin mixture on top.

4



Press the START key.

5



Measurement value is displayed in 3 seconds.

Commentary

What is gravimetric soil moisture?

As defined by ISO 16586:2003, soil quality is the water content % of soil expressed by mass (weight). It is the mass of water relative to the mass of oven-dried soil. Soil is dried in an 110°C±5°C oven.

*This measurement method was developed by Professor Wada at Kyushu University and has proven to have a strong correlation with ISO 16586:2003.

$$w = \frac{Ma - Mb}{Mb} \times 100$$

- w = Gravimetric soil moisture (%)
- Ma = Mass of soil before drying in the oven
- Mb = Mass of soil after drying in the oven
- $Ma - Mb$ = Mass of water in soil

What is volumetric soil moisture?


It is the water content % of soil expressed by volume. It is the volume of water relative to the total volume of a soil sample. A sand-pouring cylinder is commonly used.

The PAL-Soil calculates the water content of soil by measuring a decline in the refractive index of glycerin after it is mixed with water at the 5:3 ratios. It utilizes the water-absorbing properties of glycerin.


$$\theta = \frac{V_w}{V} \times 100$$

- θ = Volumetric soil moisture (%)
- V = Total volume of soil sample
- V_w = Volume of water

Comparison between refractometers and oven-dry method for determination of gravimetric water content (%) of soil

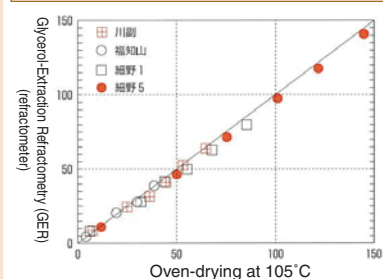

Soil Moisture

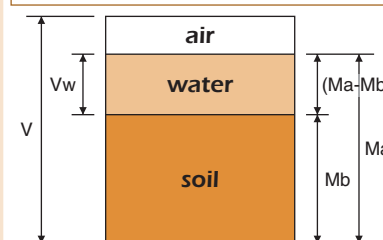

Specifications

Measurement range	<ul style="list-style-type: none"> Gravimetric soil moisture: 0 to 200% (Automatic Temperature Compensation) Volumetric soil moisture: 0 to 100% Temperature: 10.0 to 40.0°C 		
Resolution	<ul style="list-style-type: none"> Gravimetric soil moisture: 1% Volumetric soil moisture: 1% Temperature: 0.1°C 		
Measurement accuracy	<ul style="list-style-type: none"> Gravimetric soil moisture: ±2% (0 to 40%), ±5% (41 to 100%) Volumetric soil moisture (Repeatability): ±1% (0 to 60%), ±2% (61 to 100%) Temperature: ±1°C 		
Measurement temperature	10 to 40°C	Power supply	AAA alkaline battery × 2
Ambient temperature	10 to 40°C	Battery life	About 11,000 measurements (when an alkaline battery is used)
Option	Pocketable Scale	Accessories	<ul style="list-style-type: none"> AAA alkaline batteries Filter paper Re-sealable plastic storage bags Beaker Plastic tweezers Plastic spoon
International Protection class	IP65 Water Resistant		
Dimensions and weight	55(W)×31(D)×109(H)mm 100g		

*Purchase a premium quality glycerin reagent from a local pharmacy or reagent store.



Always clean and shiny -
can be cleaned under
running water.

All ATAGO refractometers are designed and manufactured in Japan.

HACCP GMP GLP

ATAGO products comply with HACCP, GMP, and GLP standards.

ATAGO CO., LTD.

[V.01] 12021000PP Printed in Japan

(ES) Equipements Scientifiques SA - Département Bio-tests & Industries - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 90 - Fax. 01 47 01 16 22 - e-mail: bio@es-france.com - Site Web: www.es-france.com