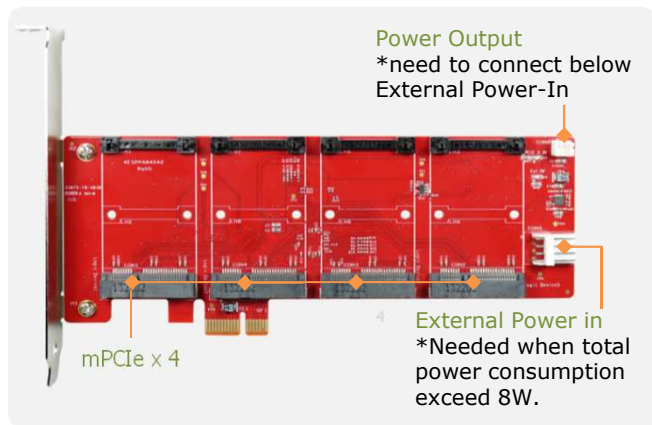
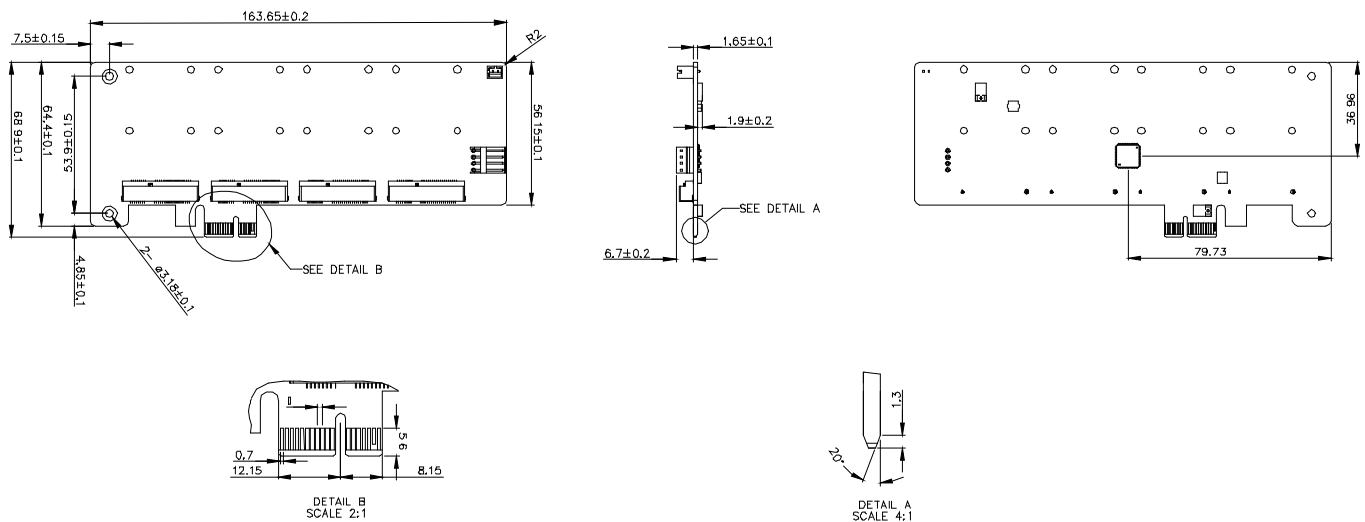


**Features**

- PCI Express base SPEC 2.0 x 1 (backward compatible with SPEC 1.1 & 1.0a)
- Supports four mPCIe slots.
- Low Profile PCI Express Card Form Factor.
- On board power output.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing**Specifications****Headquarters (Taiwan)**

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:**USA**

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-282-1818

Japan

jpsales@innodisk.com
+81-45-594-7581

China

sales_cn@innodisk.com
+86-755-21673689

Form-Factor	Low profile PCIe
Input I/F	PCI Express 2.0 x 1
Output I/F	PCI Express 2.0
Output Connector	mPCIe x 4
TDP	2.2W (12V x 190mA)
Dimension (WxLxH)	163.65 x 68.9 x 10.25mm, Weight: 48g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

May 22, 2015

Order Information

ESPP-2401-C1

PCIe to four mPCIe Module