

Model 2340/2350

ARBITRARY WAVEFORM GENERATORS

- Precise signal amplification with low distortion
- High Voltage Output up to 400Vp-p ($\pm 200V$)
- DC-2MHz small signal bandwidth (-3dB)
- Full power bandwidth, from DC to 200kHz (-0.1dB)
- Single or Dual Channel
- Independent 200:1 voltage monitor outputs for each channel
- Compatible with all TEGAM Arbitrary Waveform and Function Generators
- Compatible with any Signal Generator that can drive a 50 Ω impedance.
- Excellent Choice for MEMS, electrostatics, or piezoelectric applications.

Single/Dual Channel High-Voltage Amplifiers

The Models 2340/2350 are designed for applications that require high-voltage amplification beyond the standard voltage limitations of most waveform, function, or pulse generators.

With a maximum output voltage of 400Vp-p, the Models 2340/2350 come standard with a fixed gain of +50. Gains from 10 to 100 are available by special order.

Each channel is rated for 40mA continuous current with 0.2 Ω output impedance. Each channel has an independent, buffered, voltage monitor output for applications that require a low-level representation of the output signal. The buffers produce a reduction of 200:1 for 50 Ω inputs and 100:1 for 1M Ω and above inputs.

The output current is sensed in both directions by the current limit function. This provides maximum protection to the amplifier during operation. A built-in

power supply monitor protects the power amplifiers by tracking the DC power supply. If a high-voltage DC fault occurs, the monitor will disconnect the power supply from the power amplifiers. Cycling the supply power resets the fault. The amplifiers can drive capacitive loads up to 200pF while maintaining a full power bandwidth exceeding 200kHz.

For maximum user safety, the outputs are grounded to the instrument chassis to prevent accidental voltage loops. A binding post is provided on the front panel for a direct chassis ground connection.

The Models 2340/2350 are cost-effective solutions for specialized applications where low distortion and precise signal amplification is required. These units are particularly suited for high frequency, electrostatic applications that require high voltage.



Prices and specifications subject to change without notice.

TEGAM[®]

YOUR GLOBAL SOURCE FOR TEST
AND MEASUREMENT SOLUTIONS

Model 2340/2350

HIGH VOLTAGE AMPLIFIERS

Specifications

Electrical Specifications

Number of Channels	1 Channel - Model 2340 or 2 Channel - Model 2350
Input Impedance	50Ω Direct Coupled
Output Voltage Range	0 to ± 200V Direct Coupled (400V p-p)
Maximum Output Current	40mA per channel
Output Impedance	< 0.2Ω
Voltage Gain	+50 Fixed (Special Order +10-100)
Sine Wave Distortion (THD)	Refer to Figure 4
Small Signal Bandwidth	DC to 2MHz -Typical (-3dB) - Refer to Figure 1
Full Power	200kHz / 400 Vpp Sine - Typical (-0.1dB) (CL<200pF)
Slew Rate	>250V/uSec
Square Wave Response	< 0.8 μSec for 200 Volt Step
Aberrations	< 2%
50Ω Voltage Monitor Outputs (One for each Channel)	50Ω Input Z (200:1 Ratio) > 1MΩ Input Z (100:1 Ratio)

Safety

Conforms with IEC 61010-1, CE Marked

Environmental

Operating Temperature	0°C to +45°C, (32°F to 113°F) Ambient
Storage Temperature	-20°C to +50°C (-4°F to +122°F)
Humidity Range	< 80% RH Non-Condensing

General

Input Supply Voltage	110/220V 50/60 Hz - Rear Panel Selectable
Power Rating	100VA; 80W
Dimensions: (H x W x L)	4.51" x 10.14" x 11.81" (11.5 x 25.8 x 30.0 cm)
Weight (approximate)	10lbs (4.5kg)

Standard Accessories

User's Manual; 2- BNC to High-Voltage BNC Cables (3ft)

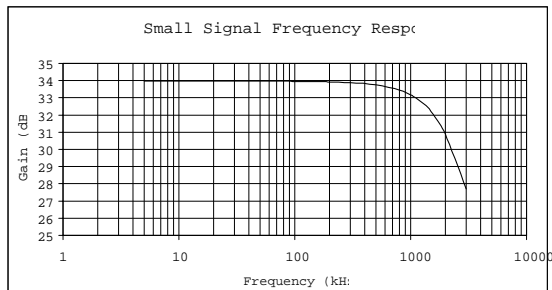


Figure 1: Small Signal Frequency Response (Typical)
Amplifier Gain measured with 900 mV peak-to-peak input.
Amplifier Frequency Response (-3 dB) at 2 MHz.

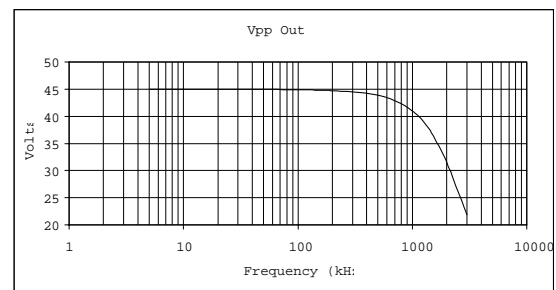


Figure 2: Small Signal Frequency Response (Typical)
Amplifier Gain measured with 900 mV peak-to-peak input. Same as Figure 1 but Y-axis is Volts instead of dB.

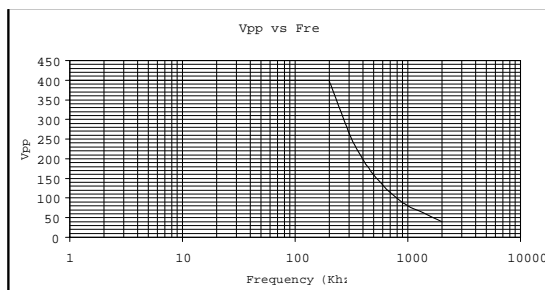


Figure 3: Maximum Vpp vs. Frequency
Amplifier's maximum peak-to-peak output roll off with frequency.
This is due to the amplifier's slew rate of 250 V/μSec.

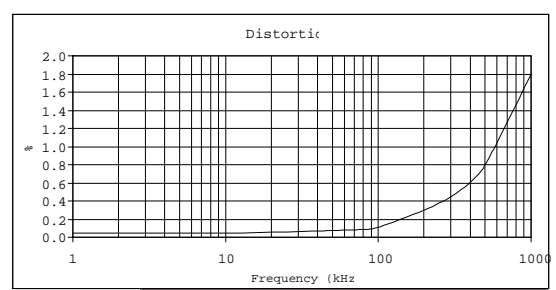


Figure 4: Distortion (Typical)
Distortion measurements were made operating the amplifier at
75% of the maximum Vpp output obtained from Figure 3.

This data sheet was current when it was produced. However, products are constantly being updated and improved. Because of this some differences may occur between the descriptions herein and the current product. Prices and specifications may be changed without notice.



TEN TEGAM WAY • GENEVA, OHIO 44041
440-466-6100 • FAX 440-466-6110
www.tegam.com • e-mail: sales@tegam.com