


Spectrum Analyzers

RSA6000 Series Datasheet

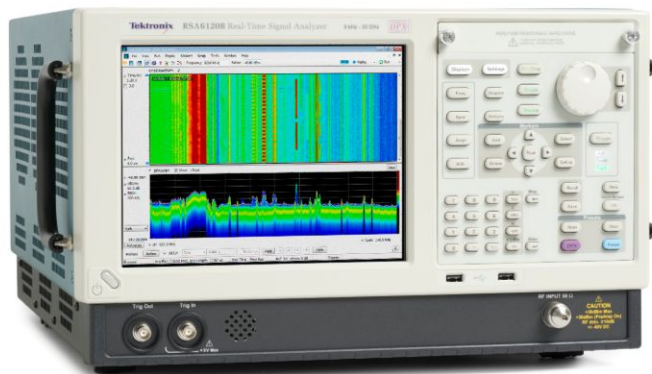

The RSA6000 Series gives you the functionality of a high-performance spectrum analyzer, wideband vector signal analyzer, and the unique trigger-capture-analyze capability of a real-time spectrum analyzer - all in a single package. A typical 20 dBm TOI and -151 dBm/Hz DANL at 2 GHz gives you the dynamic range you expect for challenging spectrum analysis measurements.

Key Performance Specifications


- 20 dBm 3rd order intercept at 2 GHz, typical
- Displayed average noise level -151 dBm/Hz at 2 GHz (-167 dBm/Hz, preamp on, typical) enables low-level signal search
- Revolutionary DPX displays transients with a minimum event duration of 3.7 μ s
- Trigger on frequency edge or power level transients with a minimum event duration of 3.7 μ s in the frequency domain, 9.1 ns in time domain
- Up to 7.15 s acquisitions at 110 MHz bandwidth can be directly stored as MATLAB™ compatible files

Key Features


- High-performance spectrum analysis
 - Fully preselected and image free at all times for maximum dynamic range at any acquisition bandwidth
 - Fastest high-resolution sweep speed: 1 GHz sweep in 10 kHz RBW in less than 1 second
 - Internal preamp up to 20 GHz
- Discover
 - DPX® spectrum processing provides an intuitive understanding of time-varying RF signals with color-graded displays based on frequency of occurrence
 - Swept DPX spectrum enables unprecedented signal discovery over full instrument span
- Trigger
 - DPX density™ trigger activated directly from DPX display
 - Time-qualified and runt triggers trap elusive transients
 - Frequency mask trigger captures any change in frequency domain
- Capture
 - Gap-free DPX spectrogram records up to 4444 days of spectral information for analysis and replay
 - Interfaces with TekConnect® probes for RF probing
- Analyze
 - Time-correlated multidomain displays for quicker understanding of cause and effect when troubleshooting
 - Standard power, spectrum, and statistics measurements help you characterize components and systems: channel power, ACLR, power vs. time, CCDF, OBW/EBW, and spur search
 - AM/FM/PM modulation and audio measurements (Opt. 10)
 - Phase noise and jitter measurements (Opt. 11)
 - Settling time measurements, frequency, and phase (Opt. 12)
 - Pulse measurements (Opt. 20) – over 20 vector and scalar parameters including rise time, pulse width, Pulse-to-Pulse phase provide deep insight into pulse train behavior
 - General purpose digital modulation analysis (Opt. 21) provides vector signal analyzer functionality for over 20 modulation types
 - WLAN analysis for 802.11 a/b/g/j (Opt. 23), 802.11n (Opt. 24), 802.11ac (Opt. 25)

Applications

- Spectrum management – find interference and unknown signals
- Radar/EW – full characterization of pulsed and hopping systems characterize radar and pulsed RF signals
- RF debug – components, modules, and systems
- Radio/Satellite communications – analyze time-variant behavior of cognitive radio and software-defined radio systems
- EMI diagnostics – increase confidence that designs will pass compliance testing

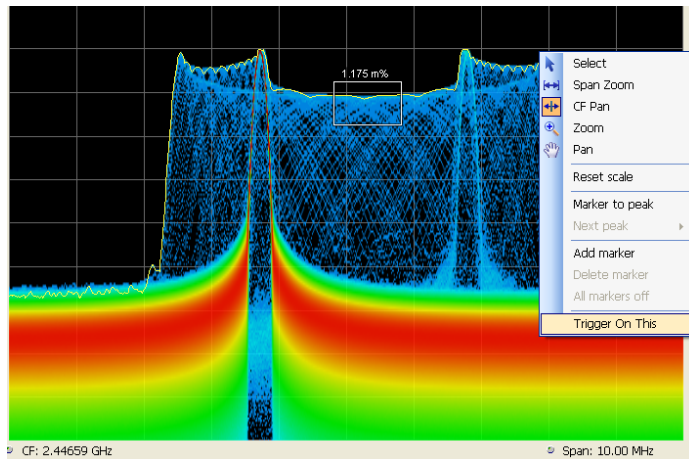

Revolutionary DPX[®] spectrum display reveals transient signal behavior that helps you discover instability, glitches, and interference. Here, an infrequently occurring transient is seen in detail. The frequency of occurrence is color-graded, indicating the infrequent transient event in blue and the noise background in red. The DPX Density[™] Trigger is activated, seen in the measurement box at the center of the screen, and Trigger On This[™] has been activated. Any signal density greater than the selected level causes a trigger event.

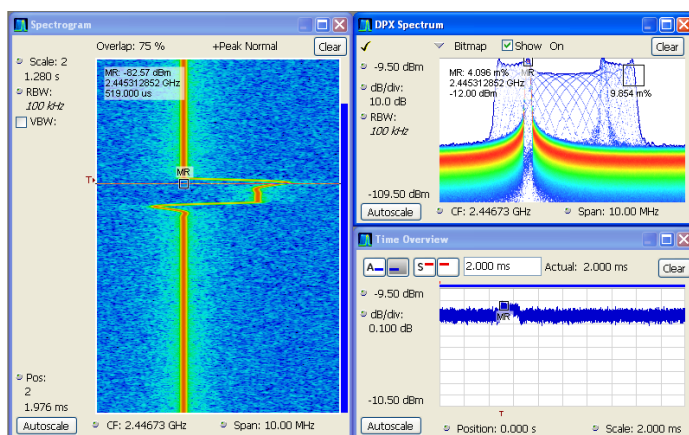

Trigger and Capture: The DPX Density[™] Trigger monitors for changes in the frequency domain, and captures any violations into memory. The spectrogram display (left panel) shows frequency and amplitude changing over time. By selecting the point in time in the spectrogram where the spectrum violation triggered the DPX Density[™] Trigger, the frequency domain view (right panel) automatically updates to show the detailed spectrum view at that precise moment in time.

High performance spectrum and vector signal analysis, and a lot more

The RSA6000 Series replaces conventional high-performance signal analyzers, offering the measurement confidence and functionality you demand for everyday tasks. A typical 20 dBm TOI and -151 dBm/Hz DANL at 2 GHz gives you the dynamic range you expect for challenging spectrum analysis measurements. All analysis is fully preselected and image free. The RSA6000 Series uses broadband preselection filters that are always in the signal path. You never have to compromise between dynamic range and analysis bandwidth by 'switching out the preselector'.

A complete toolset of power and signal statistics measurements is standard, including Channel Power, ACLR, CCDF, Occupied Bandwidth, AM/FM/PM, and Spurious measurements. Available Phase Noise and General Purpose Modulation Analysis measurements round out the expected set of high-performance analysis tools.

But, just being a high-performance signal analyzer is not sufficient to meet the demands of today's hopping, transient signals.

The RSA6000 Series will help you to easily discover design issues that other signal analyzers may miss. The revolutionary DPX[®] spectrum display offers an intuitive live color view of signal transients changing over time in the frequency domain, giving you immediate confidence in the stability of your design, or instantly displaying a fault when it occurs. Once a problem is discovered with DPX[®], the RSA6000 Series spectrum analyzers can be set to trigger on the event, capture a contiguous time record of changing RF events, and perform time-correlated analysis in all domains. You get the functionality of a high-performance spectrum analyzer, wideband vector signal analyzer, and the unique trigger-capture-analyze capability of a real-time spectrum analyzer - all in a single package.

Discover

The patented DPX[®] spectrum processing engine brings live analysis of transient events to spectrum analyzers. Performing up to 292,968 frequency transforms per second, transients of a minimum event duration of 3.7 μ s in length are displayed in the frequency domain. This is orders of magnitude faster than swept analysis techniques. Events can be color coded by rate of occurrence onto a bitmapped display, providing unparalleled insight into transient signal behavior. The DPX spectrum processor can be swept over the entire frequency range of the instrument, enabling broadband transient capture previously unavailable in any spectrum analyzer. In applications that require only spectral information, the RSA6000 Series provides gap-free spectral recording, replay, and analysis of up to 60,000 spectral traces. Spectrum recording resolution is variable from 110 μ s to 6400 s per line, allowing multiple days of recording time.

Trigger

Tektronix has a long history of innovative triggering capability, and the RSA Series spectrum analyzers lead the industry in triggered signal analysis. The RSA6000 Series provides unique triggers essential for troubleshooting modern digitally implemented RF systems. Trigger types include time-qualified power, runt, density, and frequency mask.

Time qualification can be applied to any internal trigger source, enabling capture of 'the short pulse' or 'the long pulse' in a pulse train, or only triggering when a frequency domain event lasts for a specified time. Runt triggers capture troublesome infrequent pulses that either turn on or turn off to an incorrect level, greatly reducing time to fault.

DPX Density™ Trigger works on the measured frequency of occurrence or density of the DPX display. The unique Trigger On This™ function allows the user to simply point at the signal of interest on the DPX display, and a trigger level is automatically set to trigger slightly below the measured density level. You can capture low-level signals in the presence of high-level signals at the click of a button.

The Frequency Mask Trigger (FMT) is easily configured to monitor all changes in frequency occupancy within the acquisition bandwidth.

A Power Trigger working in the time domain can be armed to monitor for a user-set power threshold. Resolution bandwidths may be used with the power trigger for band limiting and noise reduction. Two external triggers are available for synchronization to test system events.

Capture

Capture once - make multiple measurements without recapturing. All signals in an acquisition bandwidth are recorded into the RSA6000 Series deep memory. Record lengths vary depending upon the selected acquisition bandwidth - up to 7.15 seconds at 110 MHz, 343.5 seconds at 1 MHz, or 6.1 hours at 10 kHz bandwidth with Deep Memory (Opt. 53). Real-time capture of small signals in the presence of large signals is enabled with 73 dB SFDR in all acquisition bandwidths, even up to 110 MHz (Opt. 110). Acquisitions of any length can be stored in MATLAB™ Level 5 format for offline analysis.

Most spectrum analyzers in the market utilize narrowband tunable band pass filters, often YIG tuned filters (YTF) to serve as a preselector. These filters provide image rejection and improve spurious performance in swept applications by limiting the number of signals present at the first mixing stage. YTF's are narrow band devices by nature and are usually limited to bandwidths less than 50 MHz. These analyzers bypass the input filter when performing wideband analysis, leaving them susceptible to image responses when operating in modes where wideband analysis is required such as for real time signal analysis.

Unlike spectrum analyzers with YTF's, Tektronix Real Time Signal Analyzers use a wideband image-free architecture guaranteeing that signals at frequencies outside of the band to which the instrument is tuned don't create spurious or image responses. This image-free response is achieved with a series of input filters designed such that all image responses are suppressed. The input filters are overlapped by greater than the widest acquisition bandwidth, ensuring that full-bandwidth acquisitions are always available. This series of filters serves the purpose of the preselector used by other spectrum analyzers, but has the benefit of always being on while still providing the image-free response in all instrument bandwidth settings and at all frequencies.

Analyze

The RSA6000 Series offers analysis capabilities that advance productivity for engineers working on components or in RF system design, integration, and performance verification, or operations engineers working in networks, or spectrum management. In addition to spectrum analysis, spectrograms display both frequency and amplitude changes over time. Time-correlated measurements can be made across the frequency, phase, amplitude, and modulation domains. This is ideal for signal analysis that includes frequency hopping, pulse characteristics, modulation switching, settling time, bandwidth changes, and intermittent signals.

Performance you can count on


Depend on Tektronix to provide you with performance you can count on. In addition to industry-leading service and support, this product comes backed by a one-year warranty as standard.

Measurement functions


The measurement capabilities of the RSA6000 series and available options and software packages are summarized below:

| Measurements | Description |
|--|--|
| Spectrum analyzer measurements | Channel power, adjacent channel power, multicarrier adjacent channel Power/Leakage ratio, occupied bandwidth, xdB bandwidth, dBm/Hz marker, dBc/Hz marker, spectrum emissions mask |
| Time domain and statistical measurements | RF IQ vs. Time, Power vs. Time, Frequency vs. Time, Phase vs. Time, CCDF, Peak-to-Average Ratio |
| Spur search measurement | Up to 20 frequency ranges, user-selected detectors (Peak, Average, QP), filters (RBW, CISPR, MIL), and VBW in each range. Linear or Log frequency scale. Measurements and violations in absolute power or relative to a carrier. Up to 999 violations identified in tabular form for export in .CSV format |
| Analog modulation measurements | % amplitude modulation (+Peak, -Peak, RMS, mod. depth) Frequency modulation (\pm Peak, +Peak to -Peak, RMS, Peak-Peak/2, frequency error) Phase modulation (\pm Peak, RMS, +Peak to -Peak) |
| AM/FM/PM modulation and audio measurements (Opt. 10) | Carrier power, frequency error, modulation frequency, modulation parameters (\pm Peak, Peak-Peak/2, RMS), SINAD, modulation distortion, S/N, THD, TNHD |
| Phase noise and jitter measurements (Opt. 11) | Phase Noise vs. Frequency Offset Offset range 10 Hz to 1 GHz. Measures carrier power, frequency error, RMS phase noise, integrated jitter, residual FM |
| Settling time (frequency and phase) (Opt. 12) | Measured frequency, settling time from last settled frequency, settling time from last settled phase, settling time from trigger. Automatic or manual reference frequency selection. User-adjustable measurement bandwidth, averaging, and smoothing. Pass/Fail mask testing with 3 user-settable zones |


| Measurements | Description |
|--|---|
| Advanced pulse measurements suite (Opt. 20) | Average on power, peak power, average transmitted power, pulse width, rise time, fall time, repetition interval (seconds), repetition interval (Hz), duty factor (%), duty factor (ratio), ripple (dB), ripple (%), overshoot (dB), overshoot (%), droop (dB), droop (%), Pulse-Pulse frequency difference, Pulse-Pulse phase difference, RMS frequency error, max frequency error, RMS phase error, max phase error, frequency deviation, delta frequency, phase deviation, impulse response (dB), impulse response (time), time stamp |
| General purpose digital modulation analysis (Opt. 21) | Error vector magnitude (EVM) (RMS, peak, EVM vs. time), modulation error ratio (MER), magnitude error (RMS, peak, mag error vs. time), phase error (RMS, peak, phase error vs. time), origin offset, frequency error, gain imbalance, quadrature error, Rho, constellation, symbol table |
| DPX Density Measurement | Measures % signal density at any location on the DPX spectrum display and triggers on specified signal density |
| RSAPu analysis software | W-CDMA, HSPA, HSDPA, GSM/EDGE, CDMA2000 1x, CDMA2000 1xEV-DO, RFID, Phase Noise, Jitter, IEEE 802.11 a/b/g/n WLAN, IEEE 802.15.4 OQPSK (Zigbee), audio analysis |
| Flexible OFDM Analysis (Opt. 22) | OFDM Analysis for WLAN 802.11a/g/j/p and WiMAX 802.16-2004 |
| WLAN 802.11a/b/g/j/p measurement application (Opt. 23) | All of the RF transmitter measurements as defined in the IEEE standard, as well as a wide range of additional measurements including Carrier Frequency error, Symbol Timing error, Average/peak burst power, IQ Origin Offset, RMS/Peak EVM, and analysis displays, such as EVM and Phase/Magnitude Error vs. time/frequency or vs. symbols/ subcarriers, as well as packet header decoded information and symbol table. |
| WLAN 802.11n measurement application (Opt. 24) | |
| WLAN 802.11ac measurement application (Opt. 25) | |

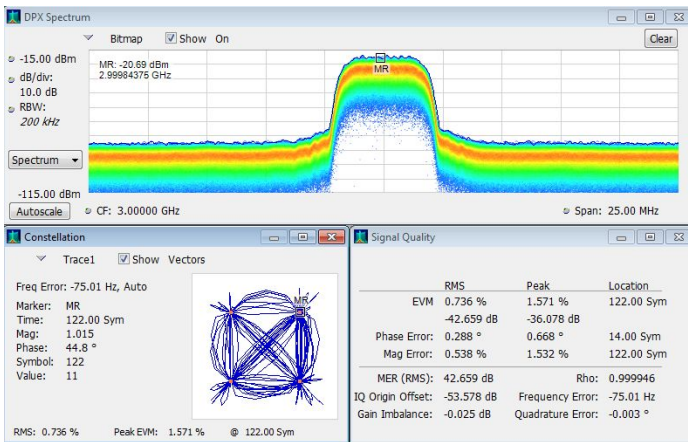


Multi-domain views provide a new level of insight into design or operational problems not possible with conventional analysis solutions. Here vector modulation quality and constellation (Opt. 21) are combined with the continuous monitoring of the DPX® spectrum display.

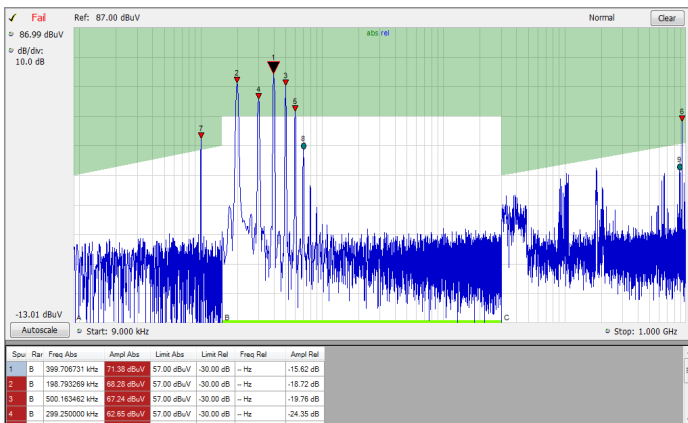


Spurious Search - Up to 20 noncontiguous frequency regions can be defined, each with their own resolution bandwidth, video bandwidth, detector (peak, average, quasi-peak), and limit ranges. Test results can be exported in .CSV format to external programs, with up to 999 violations reported. Spectrum results are available in linear or log scale.

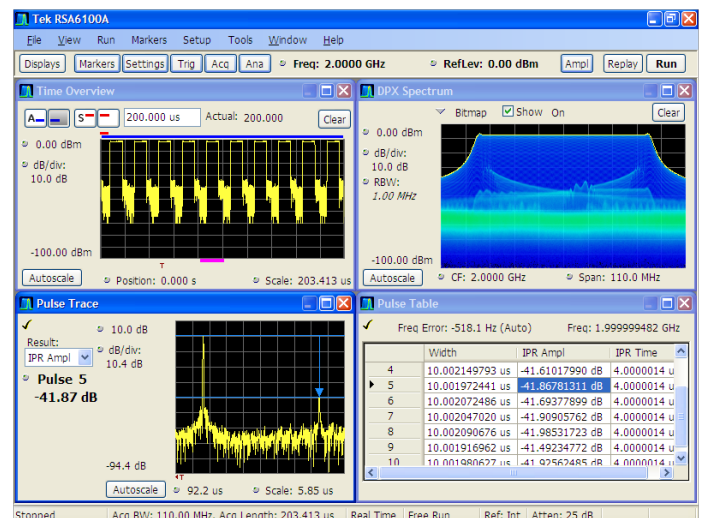


Advanced Signal Analysis package (Opt. 20) offers over 20 automated pulse parameter calculations on every pulse. Easily validate designs with measurements of peak power, pulse width rise time, ripple, droop, overshoot, and pulse-to-pulse phase. Gain insight into linear FM chirp quality with measurements such as Impulse Response and Phase Error. A pulse train (upper left) is seen with automatic calculation of pulse width and impulse response (lower right). A detailed view of the Impulse Response is seen in the lower left, and a DPX® display monitors the spectrum on the upper right.

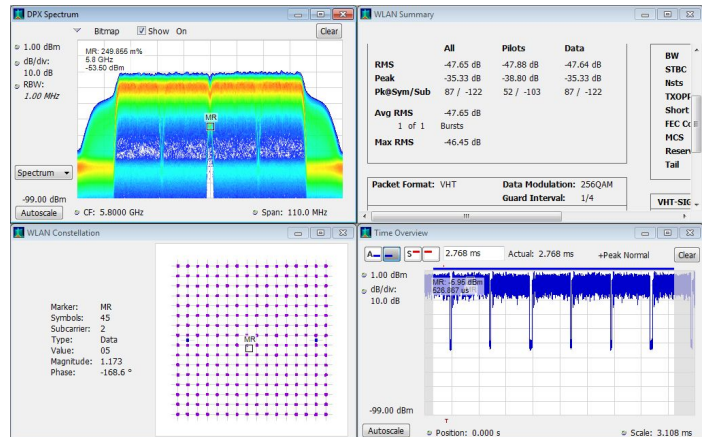


Analysis options for 802.11 standards are available. Here, an 802.11ac 80 MHz signal is analyzed, with displays of constellation, amplitude vs. time, summary of WLAN measurements, and the DPX spectrum of the analyzed signal. The density of the 'shoulders' of the WLAN signal are clearly seen in the DPX display, and a marker has been placed on the suppressed center carrier of the signal. An EVM of -47.65 dB and other signal measurements are seen in the summary panel

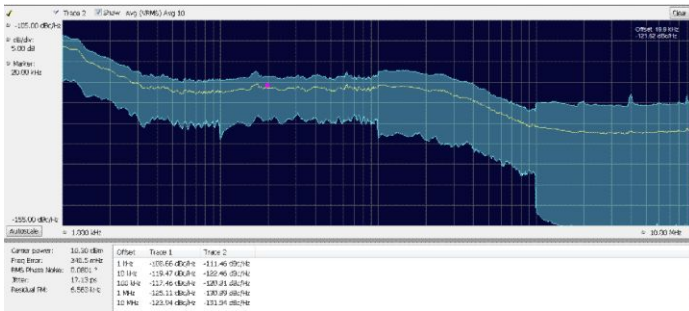


Phase noise and jitter measurements (Opt. 11) adds value to your RSA6000 Series by replacing a conventional phase noise tester for many applications. Phase noise can be measured at carrier offsets up to 1 GHz, and internal phase noise is automatically reduced by optimizing acquisition bandwidths and attenuator settings at each carrier offset for maximum dynamic range. For less critical measurements, speed optimization may be applied for faster results. Typical residual phase noise of -130 dBc/Hz at 1 MHz offset, 18 GHz carrier frequency gives sufficient measurement margin for many applications.

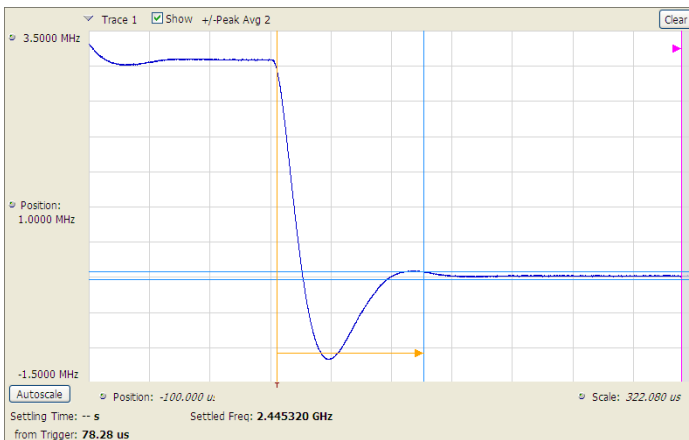


Settling time measurements (Opt. 12) are easy and automated. The user can select measurement bandwidth, tolerance bands, reference frequency (auto or manual), and establish up to 3 tolerance bands vs. time for Pass/Fail testing. Settling time may be referenced to external or internal trigger, and from the last settled frequency or phase. In the illustration, frequency settling time for a hopped oscillator is measured from an external trigger point from the device under test.

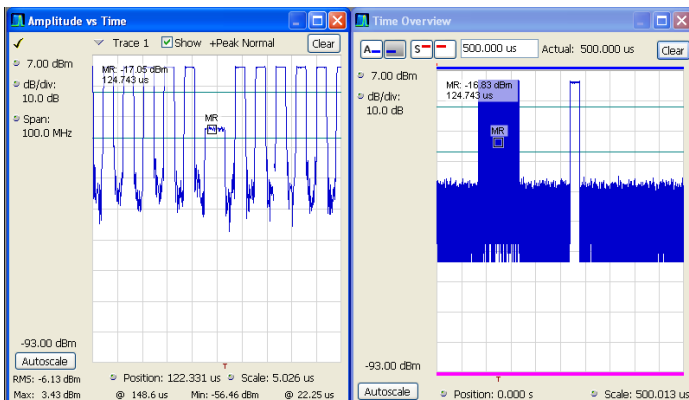

Swept DPX combines the revolutionary DPX Density™ Trigger with the ability to trigger on runt pulses and apply time qualification to any trigger. The runt trigger seen here can be used to track down nonconforming pulses in a pulse train, greatly reducing time to insight. Time qualification can be used to separate ranging pulses from higher resolution pulses in a radar signal, or trigger only on signals that remain on longer than a specified time.

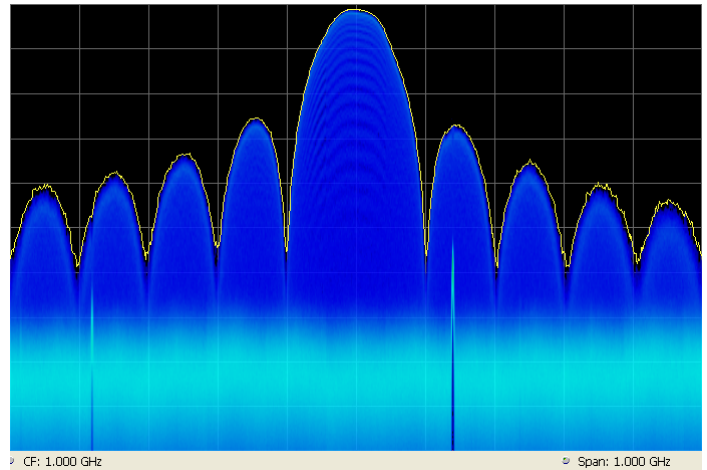

Swept DPX re-invents the way swept spectrum analysis is done, and is included in the base instrument. The DPX engine collects hundreds of thousands of spectrums per second over a 110 MHz bandwidth. Users can now sweep the DPX across the full input range of the RSA6000 Series, up to 20 GHz. Here, we see a DPX sweep of 1 GHz span, revealing two narrow-band spurious under the level of the main pulse signal. In the time a traditional spectrum analyzer has captured one spectrum, the RSA6000 Series has captured orders of magnitude more spectrums. This new level of performance reduces the chance of missing time-interleaved and transient signals during broadband searches.

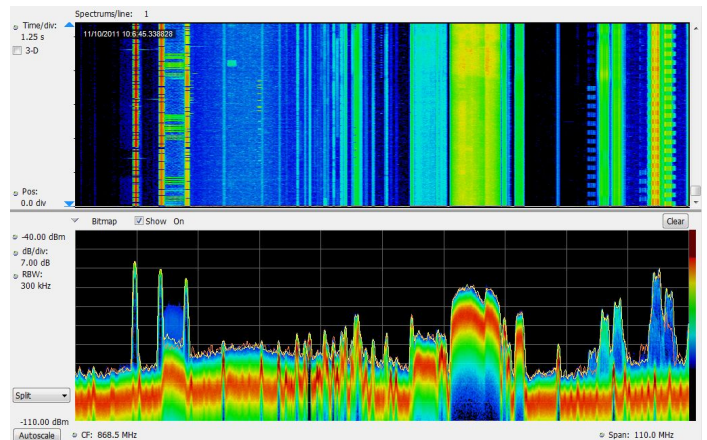

DPX Spectrograms provide gap-free spectral monitoring for up to days at a time. 60,000 traces can be recorded and reviewed, with resolution per line adjustable from 110 μ s to 6400 s.

Specifications

All specifications apply to all models unless noted otherwise.

Model overview

| | RSA6106B | RSA6114B | RSA6120B |
|---------------------------------|---|---|---|
| Frequency range | 9 kHz to 6.2 GHz | 9 kHz to 14 GHz | 9 kHz to 20 GHz |
| Real-time acquisition bandwidth | 40 MHz (110 MHz, Opt. 110) | 40 MHz (110 MHz, opt. 110) | 40 MHz (110 MHz, opt. 110) |
| Trigger modes | Free run, triggered, FastFrame | Free run, triggered, FastFrame | Free run, triggered, FastFrame |
| Trigger types | Power (Std.), Frequency mask (Opt. 52), Frequency edge, DPX density, Runt, Time qualified | Power (Std.), Frequency mask (Opt. 52), Frequency edge, DPX density, Runt, Time qualified | Power (Std.), Frequency mask (Opt. 52), Frequency edge, DPX density, Runt, Time qualified |
| Acquisition memory | 1 GB (4 GB, Opt. 53) | 1 GB (4 GB, opt. 53) | 1 GB (4 GB, opt. 53) |

Standard displays and measurements

For optional displays and measurements, see the individual options sections

| | |
|--|--|
| DPX®-based measurements on real-time data | DPX Spectrum display (live RF color-graded spectrum) DPX Spectrogram (Live spectrograms) DPX amplitude vs. time DPX frequency vs. time DPX phase vs. time |
| Displays and Measurements from acquisition data | Spectrum (amplitude vs linear or log frequency) Spectrogram (amplitude vs. frequency over time of acquisition data) Spurious (amplitude vs linear or log frequency) Amplitude vs. time Frequency vs. time Phase vs. time Amplitude modulation vs. time Frequency modulation vs. time Phase modulation vs. time RF IQ vs. time Time overview CCDF Peak-to-Average ratio |
| Frequency offset measurement | Signal analysis can be performed either at center frequency or the assigned measurement frequency up to the limits of the instrument's acquisition and measurement bandwidths |
| Acquisition replay | Replay entire contents of acquisition memory or subset of acquisitions and frames. history can collect up to 64,000 acquisitions (each containing one or more frames) or 1 GB of sample data, including DPX spectrogram data, whichever limit is reached first |

Frequency characteristics

| | |
|--|---|
| Center frequency setting resolution | 0.1 Hz |
| Frequency marker readout accuracy | $\pm(\text{RE} \times \text{MF} + 0.001 \times \text{Span} + 2)$ Hz |
| RE | Reference frequency error |
| MF | Marker frequency (Hz) |
| Span accuracy | $\pm 0.3\%$ (auto mode) |
| Reference frequency | |
| Initial accuracy at cal | 1×10^{-7} (after 10 minute warm-up) |
| Aging per day | 1×10^{-9} (after 30 days of operation) |
| Aging per year | 5×10^{-8} (first year of operation) |
| Aging per 10 years | 3×10^{-7} (after 10 years of operation) |
| Temperature drift | 2×10^{-8} (0 to 50 °C) |
| Cumulative error (temperature + aging) | 4×10^{-7} (within 10 years after calibration, typical) |
| Reference output level | >0 dBm (internal reference selected) |
| Reference output level (loophthrough) | 0 dB nominal gain from Ext Ref In to Ref Output, +15 dBm max output |
| External reference input frequencies | 1 to 25 MHz (1 MHz steps) + 1.2288 MHz, 4.8 MHz, 19.6608 MHz, 31.07 MHz |
| External reference input requirements | |
| Frequency accuracy | Within $\pm 3 \times 10^{-7}$ of a valid listed input frequency |
| Spurious | < -80 dBc within 100 kHz offset to avoid on-screen spurious |
| Input level range | -10 dBm to +6 dBm |

Trigger related characteristics

| | |
|-----------------------------|--|
| Trigger event source | RF input, Trigger 1 (front panel), Trigger 2 (rear panel), Gated, Line |
| Trigger setting | Trigger position settable from 1 to 99% of total acquisition length |
| Trigger combinatorial logic | Trigger 1 AND trigger 2 / gate may be defined as a trigger event |
| Trigger actions | Save acquisition and/or save picture on trigger |

Power level trigger

| | |
|---|---|
| Level range | 0 dB to –100 dB from reference level |
| Accuracy | For trigger levels >30 dB above noise floor, 10% to 90% of signal level |
| Level ≥ –50 dB from reference level | ±0.5 dB |
| From < –50 dB to –70 dB from reference level | ±1.5 dB |
| Trigger bandwidth range | At maximum acquisition BW |
| Standard | 4 kHz to 20 MHz + wide open |
| Opt. 110 | 11 kHz to 60 MHz + wide open |
| Trigger position timing uncertainty | |
| 40 MHz acquisition BW, 20 MHz BW | Uncertainty = ±15 ns |
| 110 MHz acquisition BW, 60 MHz BW (Opt 110) | Uncertainty = ±5 ns |
| Trigger re-arm time, minimum (fast frame on) | |
| 10 MHz acquisition BW | ≤25 µs |
| 40 MHz acquisition BW | ≤10 µs |
| 110 MHz acquisition BW (Opt. 110) | ≤5 µs |

Frequency mask trigger (Opt. 52)

| | |
|---|-------------------------------------|
| Mask shape | User defined |
| Mask point horizontal resolution | <2% of span |
| Level range | 0 dB to –80 dB from reference level |
| Level accuracy¹ | |
| 0 to –50 dB from reference level | ±(Channel response + 1.0 dB) |
| –50 dB to –70 dB from reference level | ±(Channel response + 2.5 dB) |
| Span range | 100 Hz to 40 MHz |
| | 100 Hz to 110 MHz (Opt. 110) |

¹ For masks >30 dB above noise floor

Frequency mask trigger (Opt. 52)

Minimum signal duration for 100% probability of trigger at 100% amplitude Events lasting less than minimum event duration specification will result in degraded frequency mask trigger accuracy.

Opt. 110 SPAN = 110 MHz

| FMT RBW | Minimum even duration (μs) | |
|---------|----------------------------|---------|
| | Std. | Opt. 09 |
| 10 MHz | 17.3 | 3.7 |
| 1 MHz | 19.5 | 5.8 |
| 100 KHz | 37.6 | 37.6 |

Std. SPAN = 40 MHz

| FMT RBW | Minimum even duration (μs) | |
|---------|----------------------------|---------|
| | Std. | Opt. 09 |
| 5 MHz | 17.5 | 3.9 |
| 1 MHz | 19.5 | 5.8 |
| 300 KHz | 25.1 | 11.4 |
| 100 KHz | 37.7 | 30.9 |

Trigger position uncertainty

| Acquisition bandwidth | Opt. 52 (RBW = Auto) | Opt. 52 plus Opt. 09 (RBW = Auto) |
|-----------------------|----------------------|-----------------------------------|
| 40 MHz | ±12.6 μs | ±5.8 μs |
| 110 MHz | ±9.8 μs | ±3 μs |

Advanced triggers

DPX density trigger

| | |
|------------------|-------------------------------|
| Density range | 0 to 100% density |
| Horizontal range | 0.25 Hz to 40 MHz |
| | 0.25 Hz to 110 MHz (Opt. 110) |

Runt trigger

| | |
|--|--|
| Runt definitions | Positive, Negative |
| Accuracy (for trigger levels >30 dB above noise floor, 10% to 90% of signal level) | ±0.5 dB (level ≥ -50 dB from reference level) |
| | ±1.5 dB (from < -50 dB to -70 dB from reference level) |

Time qualified triggering

| | |
|--------------------------------|--|
| Trigger types and source | Time qualification may be applied to: Level, Frequency mask (Opt. 52), DPX density, Runt, Ext. 1, Ext. 2 |
| Time qualification range | T1: 0 to 10 seconds |
| | T2: 0 to 10 seconds |
| Time qualification definitions | Shorter than T1 |
| | Longer than T1 |
| | Longer than t1 AND shorter than T2 |
| | Shorter than t1 OR longer than t2 |

Advanced triggers

Frequency edge trigger

| | |
|------------------------|--|
| Range | $\pm(1/2 \times (\text{Acq. BW or TDBW if active}))$ |
| Minimum event duration | 25 ns for 40 MHz acquisition BW using no trigger RBW |
| | 50 ns for 40 MHz acquisition BW using 20 MHz trigger RBW |
| | 9.1 ns for 110 MHz Acq. BW using no RBW |
| | 16.7 ns for 110 MHz Acq. BW using 60 MHz trigger RBW |
| Timing uncertainty | Same as power trigger position timing uncertainty |

Holdoff trigger

| | |
|-------|---------------------|
| Range | 20 ns to 10 seconds |
|-------|---------------------|

Minimum signal duration

For 100% probability of intercept, full amplitude

110 MHz span

| RBW | FFT length | Spectrums /sec | Minimum event duration 100% POI (μs) | |
|-------|------------|----------------|---|---------|
| | | | Base unit | Opt. 09 |
| 10000 | 1024 | 292,969 | 17.3 | 3.7 |
| 1000 | 1024 | 292,969 | 19.5 | 5.8 |
| 300 | 2048 | 146,484 | 28.5 | 14.8 |
| 100 | 4096 | 73,242 | 37.6 | 37.6 |
| 30 | 16384 | 18,311 | 134.6 | 134.6 |
| 20 | 32768 | 18,311 | 229.2 | 229.2 |

40 MHz span

| RBW | FFT length | Spectrums /sec | Minimum event duration 100% POI (μs) | |
|------|------------|----------------|---|---------|
| | | | Base unit | Opt. 09 |
| 5000 | 1024 | 292,969 | 17.5 | 3.9 |
| 1000 | 1024 | 292,969 | 19.4 | 5.8 |
| 300 | 1024 | 146,484 | 25 | 11.4 |
| 100 | 2048 | 73,242 | 37.6 | 30.8 |
| 30 | 4096 | 36,621 | 93.6 | 93.6 |
| 20 | 8192 | 18,311 | 147.3 | 147.3 |
| 10 | 16384 | 18,311 | 194.5 | 194.5 |

External trigger 1

| | |
|-------------|------------------|
| Level range | -2.5 V to +2.5 V |
|-------------|------------------|

| | |
|--------------------------|--------|
| Level setting resolution | 0.01 V |
|--------------------------|--------|

Trigger position timing uncertainty (50 Ω input impedance)

| | |
|---|---------------------------|
| MHz acquisition BW, 40 MHz span | Uncertainty = ± 20 ns |
| 110 MHz acquisition BW, 110 MHz span (Opt. 110) | Uncertainty = ± 12 ns |

| | |
|-----------------|--|
| Input impedance | Selectable 50 Ω /5 k Ω impedance (nominal) |
|-----------------|--|

External trigger 2

| | |
|----------------------|-------------------------|
| Threshold voltage | Fixed, TTL |
| Input impedance | 10 k Ω (nominal) |
| Trigger state select | High, Low |

Acquisition related

| | |
|---------------------------------------|---|
| A/D converter | 100 MS/s 14 bit (optional 300 MS/s, 14 bit, Opt. 110) |
| Minimum acquisition length | 64 samples |
| Acquisition length setting resolution | 1 sample |
| Fast frame acquisition mode | >64,000 records can be stored in a single acquisition (for pulse measurements and spectrogram analysis) |

| Memory depth (time) and minimum time domain resolution | Acquisition BW | Sample rate (for I and Q) | Record length | Record length (Opt. 53) | Time resolution |
|--|--------------------|---------------------------|---------------|-------------------------|-----------------|
| | | | | | |
| | 110 MHz (Opt. 110) | 150 MS/s | 1.79 s | 7.15 s | 6.6667 ns |
| | 60 MHz (Opt. 110) | 75 MS/s | 3.58 s | 14.31 s | 13.33 ns |
| | 40 MHz | 50 MS/s | 4.77 s | 19.08 s | 20 ns |
| | 20 MHz | 25 MS/s | 9.54 s | 38.17 s | 40 ns |
| | 10 MHz | 12.5 MS/s | 19.08 s | 76.35 s | 80 ns |
| | 5 MHz | 6.25 MS/s | 38.17 s | 152.7 s | 160 ns |
| | 2 MHz ² | 3.125 MS/s | 42.9 s | 171.8 s | 320 ns |
| | 1 MHz | 1.56 MS/s | 85.8 s | 343.5 s | 640 ns |
| | 500 kHz | 781 kS/s | 171.7 s | 687.1 s | 1.28 μ s |
| | 200 kHz | 390 kS/s | 343.5 s | 1374 s | 2.56 μ s |
| | 100 kHz | 195 kS/s | 687.1 s | 2748 s | 5.12 μ s |
| | 50 kHz | 97.6 kS/s | 1374 s | 5497 s | 10.24 μ s |
| | 20 kHz | 48.8 kS/s | 2748 s | 10955 s | 20.48 μ s |
| | 10 kHz | 24.4 kS/s | 5497 s | 21990 s | 40.96 μ s |
| | 5 kHz | 12.2 kS/s | 10955 s | 43980 s | 81.92 μ s |
| | 2 kHz | 3.05 kS/s | 43980 s | 175921 s | 328 μ s |
| | 1 kHz | 1.52 kS/s | 87960 s | 351843 s | 655 μ s |
| | 500 Hz | 762 S/s | 175921 s | 703687 s | 1.31 ms |
| | 200 Hz | 381 S/s | 351843 s | 1407374 s | 2.62 ms |
| | 100 Hz | 190 S/s | 703686 s | 2814749 s | 5.24 ms |

² In spans \leq 2 MHz, higher resolution data is stored, reducing maximum acquisition time.

Bandwidth related

Resolution bandwidth

| | |
|---|---|
| Resolution bandwidth range (spectrum analysis) | 0.1 Hz to 8 MHz 0.1 Hz to 10 MHz (Opt. 110) |
| Resolution bandwidth shape | Approximately Gaussian, Shape factor 4.1:1 (60:3 dB) $\pm 10\%$, typical |
| Resolution bandwidth accuracy | $\pm 1\%$ (auto-coupled RBW mode) |
| Alternative resolution bandwidth types | Kaiser window (RBW), -6 dB mil, CISPR, Blackman-Harris 4B window, Uniform (none) window, Flat-top (CW ampl.) window, Hanning window |

Video bandwidth

| | |
|------------------------------|-------------------------------|
| Video bandwidth range | 1 Hz to 10 MHz plus wide open |
| RBW/VBW maximum | 10,000:1 |
| RBW/VBW minimum | 1:1 plus wide open |
| Resolution | 5% of entered value |
| Accuracy (typical) | $\pm 10\%$ |

Time domain bandwidth (amplitude vs. time display)

| | |
|---------------------------------------|---|
| Time domain bandwidth range | At least 1/10 to 1/10,000 of acquisition bandwidth, 1 Hz minimum |
| Time domain bandwidth shape | ≤ 10 MHz, Approximately Gaussian, Shape factor 4.1:1 (60:3 dB), typical 20 MHz (60 MHz, Opt. 110), Shape factor $< 2.5:1$ (60:3 dB) typical |
| Time domain bandwidth accuracy | 1 Hz to 10 MHz = 1% (auto-coupled) 20 MHz and 60 MHz = 10% |

Minimum settable spectrum analysis RBW vs. span

| Frequency span | RBW |
|------------------|--------|
| >10 MHz | 100 Hz |
| >1 MHz to 10 MHz | 10 Hz |
| >5 kHz to 1 MHz | 1 Hz |
| ≤ 5 kHz | 0.1 Hz |

Spectrum display traces, detector, and functions

| Characteristic | Description |
|-----------------------|--|
| Traces | Three traces + 1 math waveform + 1 trace from spectrogram for spectrum display |
| Detector | Peak, -Peak, Average, \pm Peak, Sample, CISPR (Avg, Peak, Quasi-peak, Average of logs) |
| Trace functions | Normal, Average, Max hold, Min hold, Average of logs |
| Spectrum trace length | 801, 2401, 4001, 8001, or 10401 points |

Minimum FFT length vs. Trace length (independent of span and RBW)

| Trace length (points) | Minimum FFT length |
|-----------------------|--------------------|
| 801 | 1024 |
| 2401 | 4096 |
| 4001 | 8192 |
| 10401 | 16384 |

Bandwidth related

Resolution BW range vs. span
(DPX®)

| Acquisition bandwidth | RBW (min) | RBW (max) |
|-----------------------|-----------|-----------|
| 110 MHz | 20 kHz | 10 MHz |
| 55 MHz | 10 kHz | 5 MHz |
| 40 MHz | 10 kHz | 3 MHz |
| 20 MHz | 5 kHz | 2 MHz |
| 10 MHz | 2 kHz | 1 MHz |
| 5 MHz | 1 kHz | 500 kHz |
| 2 MHz | 500 Hz | 200 kHz |
| 1 MHz | 200 Hz | 100 kHz |
| 500 kHz | 100 Hz | 50 kHz |
| 200 kHz | 50 Hz | 20 kHz |
| 100 kHz | 20 Hz | 10 kHz |
| 50 kHz | 10 Hz | 5 kHz |
| 20 kHz | 5 Hz | 2 kHz |
| 10 kHz | 2 Hz | 1 kHz |
| 5 kHz | 0.1 Hz | 500 Hz |
| 2 kHz | 0.1 Hz | 200 Hz |
| 1 kHz | 0.1 Hz | 100 Hz |
| 500 Hz | 0.1 Hz | 50 Hz |
| 200 Hz | 0.1 Hz | 20 Hz |
| 100 Hz | 0.1 Hz | 10 Hz |

Minimum RBW, swept spans 10 kHz

DPX® related

DPX® digital phosphor spectrum
processing

| | |
|---|--|
| Spectrum processing rate (RBW = auto, trace length 801) | 292,968/s |
| DPX bitmap resolution | 201 × 801 |
| DPX bitmap color dynamic range | 8G (99 dB) |
| Marker information | Amplitude, frequency, and signal density on the DPX display |
| Minimum signal duration for 100% probability of detection (Max-hold on) | See table: Minimum signal duration for 100% probability of intercept, full amplitude |
| Span range (continuous processing) | 100 Hz to 40 MHz (110 MHz with opt. 110) |
| Span range (swept) | Up to instrument frequency range |
| Dwell time per step | 50 ms to 100 s |
| Trace processing | Color-graded bitmap, +Peak, -Peak, Average |
| Trace length | 801, 2401, 4001, 10401 |
| Resolution BW accuracy | 7% |

DPX® related**DPX® zero-span amplitude,
frequency, phase performance
(Nominal)**

| | |
|--|---|
| Measurement bandwidth range | 100 Hz to maximum acquisition bandwidth of instrument |
| Time domain bandwidth (TDBW) range | At least 1/10 to 1/10,000 of acquisition bandwidth, 1 Hz minimum |
| Time domain bandwidth (TDBW) accuracy | ±1% |
| Sweep time range | 100 ns (minimum) 1 s (maximum, measurement BW >60 MHz) 2000 s (maximum, measurement BW ≤60 MHz) |
| Time accuracy | ±(0.5 % + reference frequency accuracy) |
| Zero-span trigger timing uncertainty (power trigger) | +/- (Zero-span sweep time / 400) at trigger point, for S/N ratio ≥40 dB |
| DPX frequency display range | ±100 MHz maximum |
| DPX phase display range | ±200 degrees maximum, phase-wrapped ±500G degrees, phase-unwrapped |

DPX® spectrogram performance

| | |
|--|---|
| Span range | 100 Hz to maximum acquisition bandwidth |
| DPX spectrogram trace detection | +Peak, -Peak, avg (V_{RMS}) |
| DPX spectrogram trace length | 801 to 4001 |
| DPX spectrogram memory depth | Trace length = 801: 60,000 traces Trace length = 2401: 20,000 traces Trace length = 4001: 12,000 traces |
| Time resolution per line | 110 μs to 6400 s, user settable |
| Maximum recording time vs. line resolution | 6.6 seconds (801 points/trace, 110 μs/line) to 4444 days (801 points/trace, 6400 s/line) |

Stability

| | |
|-------------|--|
| Residual FM | <2 Hz _{p-p} in 1 second (95% confidence, typical) |
|-------------|--|

Phase noise sidebands

dBc/Hz at specified center frequency

CF = 1 GHz

| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | -86 | -86 |
| 1 kHz | -100 | -106 |
| 10 kHz | -106 | -110 |
| 100 kHz | -107 | -113 |
| 1 MHz | -128 | -134 |
| 6 MHz | -134 | -142 |
| 10 MHz | -134 | -142 |

CF = 2 GHz

| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | --- | - 80 |
| 1 kHz | --- | -106 |
| 10 kHz | --- | -110 |
| 100 kHz | --- | -111 |
| 1 MHz | --- | -133 |
| 6 MHz | --- | -142 |
| 10 MHz | --- | -142 |

CF = 6 GHz

| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | --- | - 70 |
| 1 kHz | --- | -96 |
| 10 kHz | --- | -107 |
| 100 kHz | --- | -107 |
| 1 MHz | --- | -132 |
| 6 MHz | --- | -142 |
| 10 MHz | --- | -142 |

CF = 10 GHz (RSA6114B)

| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | --- | - 64 |
| 1 kHz | --- | -91 |
| 10 kHz | --- | -106 |
| 100 kHz | --- | -106 |
| 1 MHz | --- | -132 |
| 6 MHz | --- | -142 |
| 10 MHz | --- | -142 |

CF = 10 GHz (RSA6120B)


| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | --- | - 77 |
| 1 kHz | --- | -95 |
| 10 kHz | --- | -111 |
| 100 kHz | --- | -112 |
| 1 MHz | --- | -130 |
| 6 MHz | --- | -142 |
| 10 MHz | --- | -142 |

Phase noise sidebands

CF = 18 GHz (RSA6120B)

| Offset | Specification | Typical |
|---------|---------------|---------|
| 100 Hz | --- | - 70 |
| 1 kHz | --- | -93 |
| 10 kHz | --- | -108 |
| 100 kHz | --- | -111 |
| 1 MHz | --- | -130 |
| 6 MHz | --- | -142 |
| 10 MHz | --- | -142 |

Typical phase noise performance as measured by Opt. 11.

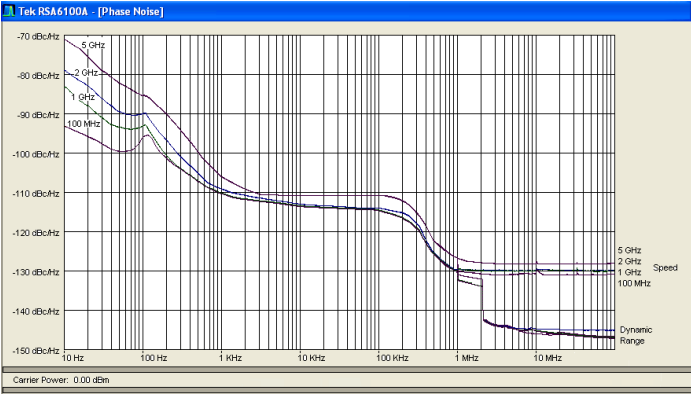

Amplitude

| | |
|---|---|
| Measurement range | Displayed average noise level to maximum measurable input |
| Input attenuator range | 0 dB to 75 dB, 5 dB step |
| Maximum safe input level | |
| Average continuous (RF ATT ≥10 dB, preamp off) | +30 dBm |
| Average continuous (RF ATT ≥10 dB, preamp on) | Option 50 preamp on: +20 dBm Option 51 preamp on: +30 dBm |
| Maximum measureable input level | |
| Average continuous (RF ATT: auto) | +30 dBm |
| Pulsed RF (RF ATT: auto, PW <5 μs, 0.5% duty cycle) | 75 W |
| Max DC voltage | ±40 V |
| Log display range | 0.01 dBm/div to 20 dB/div |
| Display divisions | 10 divisions |
| Display units | dBm, dBmV, Watts, Volts, Amps, dBuW, dBuV, dBuA, dBW, dBV, dBV/m, and dBA/m |
| Marker readout resolution, dB units | 0.01 dB |

Amplitude

| | |
|--|---|
| Marker readout resolution, Volts units | Reference-level dependent, as small as 0.001 μ V |
| Reference level setting range | 0.1 dB step, -170 dBm to +50 dBm (minimum ref. level -50 dBm at center frequency <80 MHz) |
| Level linearity | ± 0.1 dB (0 to -70 dB from reference level) |

Frequency response

18 °C to 28 °C, atten. = 10 dB, preamp off

| Range | Response |
|------------------------------|--------------|
| 10 MHz - 3 GHz | ± 0.5 dB |
| >3 GHz - 6.2 GHz | ± 0.8 dB |
| >6.2 GHz - 14 GHz (RSA6114B) | ± 1.0 dB |
| >6.2 GHz - 20 GHz (RSA6120B) | ± 1.0 dB |

5 °C to 50 °C, all attenuator settings (Typical)

| Range | Response |
|------------------------------|--------------|
| 9 kHz - 3 GHz | ± 0.7 dB |
| >3 GHz - 6.2 GHz | ± 0.8 dB |
| >6.2 GHz - 14 GHz (RSA6114B) | ± 2.0 dB |
| >6.2 GHz - 20 GHz (RSA6120B) | ± 2.0 dB |

RSA6106B Preamp (Opt. 50) On (Atten. = 10 dB)

| Range | Response |
|-----------------|--------------|
| 1 MHz - 6.2 GHz | ± 2.0 dB |

RSA6114B and RSA6120B Preamp (Opt. 51) On (Atten. = 10 dB)

| Range | Response |
|---------------------------------|--------------|
| 100 kHz - 8 GHz | ± 1.5 dB |
| 8 GHz - 14 GHz | ± 3 dB |
| 14 GHz - 20 GHz (RSA6120B only) | ± 3 dB |

Amplitude accuracy

Specifications excluding mismatch error.

Absolute amplitude accuracy at calibration point (100 MHz, -20 dBm signal, 10 dB ATT, 18 °C to 28 °C) ± 0.31 dB

Input attenuator switching uncertainty ± 0.2 dB

Absolute amplitude accuracy at center frequency, 95% confidence³

| | |
|-------------------|--------------|
| 10 MHz to 3 GHz | ± 0.5 dB |
| 3 GHz to 6.2 GHz | ± 0.8 dB |
| 6.2 GHz to 20 GHz | ± 1.5 dB |

VSWR Atten. = 10 dB, preamp off, CF set within 200 MHz of VSWR test frequency

| | |
|------------------|--------|
| 10 MHz to 4 GHz | <1.5:1 |
| 4 GHz to 6.2 GHz | <1.6:1 |

³ 18 °C to 28 °C, Ref Level \leq -15 dBm, Attenuator Auto-coupled, Signal Level -15 dBm to -50 dBm. 10 Hz \leq RBW \leq 1 MHz, after alignment performed.

Amplitude accuracy

6.2 GHz to 14 GHz (RSA6114B only) <1.9:1

6.2 GHz to 20 GHz (RSA6120B only) <1.9:1

VSWR with preamp Atten. = 10 dB, preamp on, CF set within 200 MHz of VSWR test frequency

10 MHz to 6.2 GHz (RSA6106B only) <1.5:1

10 MHz to 4 GHz <1.5:1

4 GHz to 6.2 GHz <1.6:1

6.2 GHz to 14 GHz (RSA6114B only) <1.9:1

6.2 GHz to 20 GHz (RSA6120B only) <1.9:1

Noise and distortion characteristics

3rd order intermodulation distortion, typical^{4 5}

RSA6106B, RSA6114B

| Frequency | 3 rd order intermodulation distortion, dBc | 3 rd order intercept, dBm |
|-------------------|---|--------------------------------------|
| 9 kHz to 100 MHz | -77 | 13.5 |
| 100 MHz to 3 GHz | -80 | 15 |
| 3 GHz to 6.2 GHz | -84 | 17 |
| 6.2 GHz to 14 GHz | -84 | 17 |

RSA6120B

| | | |
|-------------------|-----|------|
| 9 kHz to 100 MHz | -79 | 14.5 |
| 100 MHz to 3 GHz | -90 | 20 |
| 3 GHz to 6.2 GHz | -88 | 19 |
| 6.2 GHz to 20 GHz | -88 | 19 |

2nd harmonic distortion

| Frequency | 2nd Harmonic Distortion, Typical |
|--|----------------------------------|
| 10 MHz to 3.1 GHz ⁶ | < -80 dBc |
| >3.1 GHz to 7 GHz (RSA6114B) ⁶ | < -80 dBc |
| >3.1 GHz to 10 GHz ⁷ (RSA6120B) | < -80 dBc |

⁴ Each Signal Level -25 dBm, Ref Level -20 dBm, Attenuator = 0 dB, 1 MHz tone separation.

⁵ 3rd order intercept point is calculated from 3rd order intermodulation performance.

⁶ -40 dBm at RF input, Attenuator = 0, Preamp Off, typical.

⁷ < -80 dBc, -25 dBm at RF input, Atten = 0, Preamp OFF, Maximize Dynamic Range "RF & IF Optimization" mode.

Noise and distortion characteristics

Displayed average noise level,
Preamp off⁸

General

| Frequency | Specification | Typical |
|---------------------|---------------|-------------|
| 9 kHz to 10 MHz | -99 dBm/Hz | -102 dBm/Hz |
| >10 MHz to 100 MHz | -149 dBm/Hz | -151 dBm/Hz |
| >100 MHz to 2.3 GHz | -151 dBm/Hz | -153 dBm/Hz |
| >2.3 GHz to 4 GHz | -149 dBm/Hz | -151 dBm/Hz |
| >4 GHz to 6.2 GHz | -145 dBm/Hz | -147 dBm/Hz |

RSA6114B only

| Frequency | Specification | Typical |
|------------------|---------------|-------------|
| 6.2 GHz to 7 GHz | -145 dBm/Hz | -147 dBm/Hz |
| 7 GHz to 10 GHz | -137 dBm/Hz | -139 dBm/Hz |
| 10 GHz to 14 GHz | -135 dBm/Hz | -139 dBm/Hz |

RSA6120B Only

| Frequency | Specification | Typical |
|---------------------|---------------|-------------|
| >6.2 GHz to 8.2 GHz | -145 dBm/Hz | -147 dBm/Hz |
| >8.2 GHz to 15 GHz | -149 dBm/Hz | -152 dBm/Hz |
| >15 GHz to 17.5 GHz | -145 dBm/Hz | -147 dBm/Hz |
| >17.5 GHz to 20 GHz | -143 dBm/Hz | -145 dBm/Hz |

Preamplifier performance RSA6106B (Opt. 50)

| | |
|-------------------------|-------------------------|
| Frequency range | 1 MHz to 6.2 GHz |
| Noise figure at 6.2 GHz | <6 dB at 10 GHz |
| Gain | 20 dB at 2 GHz |
| ESD protection level | 1 kV (human body model) |

Preamplifier performance RSA6114B and RSA6120B (Opt. 51)

| | |
|------------------------|--|
| Frequency range | 100 kHz to 14 GHz (RSA6114B) 100 kHz to 20 GHz (RSA6120B) |
| Noise figure at 10 GHz | <6 dB at 10 GHz |
| Gain | 30 dB at 10 GHz |
| ESD protection level | 500 V (Human Body Model) |

Displayed average noise level,⁹ preamp on (RSA6106B, Opt.50)

| Frequency | Specification | Typical |
|------------------|---------------|-------------|
| 1 MHz to 10 MHz | -159 dBm/Hz | -162 dBm/Hz |
| 10 MHz to 1 GHz | -165 dBm/Hz | -168 dBm/Hz |
| 1 GHz to 4 GHz | -164 dBm/Hz | -167 dBm/Hz |
| 4 GHz to 6.2 GHz | -163 dBm/Hz | -166 dBm/Hz |

⁸ Measured using 1 kHz RBW, 100 kHz span, 100 averages, Best Noise mode, input terminated, Average of Logs detection.

⁹ Measured using 1 kHz RBW, 100 kHz span, 100 averages, Best Noise mode, input terminated, Average of Log detection.

Noise and distortion characteristics

Displayed average noise level,¹⁰
preamp on (RSA6114B and
RSA6120B, Opt. 51)

| Frequency | Specification | Typical |
|--------------------|---------------|-------------|
| 100 kHz to 2 MHz | -122 dBm/Hz | -133 dBm/Hz |
| 2 MHz to 5 MHz | -140 dBm/Hz | -151 dBm/Hz |
| 5 MHz to 15 MHz | -145 dBm/Hz | -155 dBm/Hz |
| 15 MHz to 50 MHz | -152 dBm/Hz | -160 dBm/Hz |
| 50 MHz to 150 MHz | -160 dBm/Hz | -166 dBm/Hz |
| 150 MHz to 4 GHz | -164 dBm/Hz | -168 dBm/Hz |
| 4 GHz to 14 GHz | -162 dBm/Hz | -166 dBm/Hz |
| 14 GHz to 17.5 GHz | -160 dBm/Hz | -165 dBm/Hz |
| 17.5 GHz to 20 GHz | -159 dBm/Hz | -163 dBm/Hz |

Residual response¹¹

| | |
|-----------------------------------|----------------------------|
| 40 MHz to 200 MHz | -90 dBm |
| >200 MHz to 6.2 GHz (RSA6106B) | -95 dBm -110 dBm (typical) |
| >200 MHz to 14 GHz (RSA6114B) | -95 dBm (typical) |
| >200 MHz to 20 GHz (RSA6120B) | -95 dBm -110 dBm (typical) |

Image response¹²

| | |
|--|-----------|
| 9 kHz to 6.2 GHz | < -80 dBc |
| 6.2 GHz to 8 GHz (RSA6114B/ RSA6120B) | < -80 dBc |
| >8 GHz to 14 GHz (RSA6114B) | < -76 dBc |
| >6.2 GHz to 20 GHz (RSA6120B) | < -76 dBc |

Spurious response with signal¹³

| Frequency | Span ≤ 40 MHz | | Opt. 110 | |
|----------------------------------|---------------------|---------|-------------------------|---------|
| | Swept spans >40 MHz | | 40 MHz < span ≤ 110 MHz | |
| | Specification | Typical | Specification | Typical |
| 30 MHz to 6.2 GHz | -73 dBc | -78 dBc | -73 dBc | -75 dBc |
| ≥6.2 GHz to 14 GHz (RSA6114B) | -70 dBc | -75 dBc | -70 dBc | -75 dBc |
| >6.2 GHz to 20 GHz (RSA6120B) | -70 dBc | -75 dBc | -70 dBc | -75 dBc |

Spurious response with signal at 4.75 GHz

< 62 dBc
(CF 9 kHz to 8 GHz, Ref = -30 dBm, Atten = 10 dB, RBW = 1 kHz)
Signal frequency range = 4.7225 to 4.7775 GHz, RF input level = -30 dBm

Local oscillator feed-through to input connector

< -65 dBm
(typical, attenuator = 10 dB)

¹⁰ Measured using 1 kHz RBW, 100 kHz span, 100 averages, Best Noise mode, input terminated, Average of Logs detection.

¹¹ Input terminated, RBW = 1 kHz, Attenuator = 0 dB.

¹² Ref = -30 dBm, Attenuator = 10 dB, RF Input Level = -30 dBm, RBW = 10 Hz.

¹³ RF Input Level = -15 dBm, Attenuator = 10 dB, Offset ≥400 kHz, Mode: Auto. Input signal at center frequency. Performance level for signals offset from center frequency typically the same.

Noise and distortion characteristics

Adjacent channel leakage ratio
dynamic range ¹⁴

3GPP downlink, 1 DPCH

| Measurement mode | ACLR, typical | |
|------------------|---------------|-----------|
| | Adjacent | Alternate |
| Uncorrected | -70 dB | -70 dB |
| Noise corrected | -79 dB | -79 dB |

3GPP TM1 64 channel

| Measurement mode | ACLR, typical | |
|------------------|---------------|-----------|
| | Adjacent | Alternate |
| Uncorrected | -69 dB | -69 dB |
| Noise corrected | -78 dB | -78 dB |

IF frequency response and
phase linearity ¹⁵

| Frequency range (GHz) | Acq. bandwidth | Specification | Amplitude/phase (typical, RMS) |
|---------------------------|----------------|---------------|--------------------------------|
| 0.01 to 6.2 ¹⁶ | ≤300 kHz | ±0.10 dB | 0.05 dB/0.1° |
| 0.03 to 6.2 | ≤40 MHz | ±0.30 dB | 0.20 dB/0.5° |
| >6.2 to 14 (RSA6114B) | ≤300 kHz | ±0.10 dB | 0.05 dB/0.1° |
| >6.2 to 14 (RSA6114B) | ≤40 MHz | ±0.50 dB | 0.40 dB/1.0° |
| >6.2 to 20 (RSA6120B) | ≤300 kHz | ±0.10 dB | 0.05 dB/0.1° |
| >6.2 to 20 (RSA6120B) | ≤40 MHz | ±0.50 dB | 0.40 dB/1.0° |

Opt. 110

| Frequency range (GHz) | Acq. bandwidth | Specification | Amplitude/phase (typical, RMS) |
|--------------------------|----------------|---------------|--------------------------------|
| 0.07 to 3.0 | ≤110 MHz | ±0.50 dB | 0.30 dB/1.0° |
| >3 to 6.2 | ≤110 MHz | ±0.50 dB | 0.40 dB/1.0° |
| >6.2 to 14 (RSA6114B) | ≤80 MHz | ±0.75 dB | 0.70 dB/1.5° |
| >6.2 to 14 (RSA6114B) | ≤110 MHz | ±1.0 dB | 0.70 dB/1.5° |
| >6.2 to 20 (RSA6120B) | ≤80 MHz | ±0.75 dB | 0.70 dB/1.5° 0.05 dB/0.1° |
| >6.2 to 20 (RSA6120B) | ≤110 MHz | ±1.0 dB | 0.70 dB/1.5° |

¹⁴ Measured with test signal amplitude adjusted for optimum performance. (CF = 2.13 GHz)

¹⁵ Amplitude flatness and phase deviation over the acquisition BW, includes RF frequency response. Attenuator Setting: 10 dB.

¹⁶ High Dynamic Range mode selected.

Analog IF and Digital IQ output (Opt. 05)**Analog IF****Frequency** 500 MHzOutput frequency varies ± 1 MHz with changes in center frequency. Sidebands may be frequency inverted from input, depending on center frequency**Output level** +3 to -10 dBm for peak signal level of -20 dBm at RF mixer (typical)

| Characteristic | Description |
|-----------------------|---|
| Filter control | Wide open (square top) or 60 MHz Gaussian |
| Bandwidth (wide open) | >150 MHz (typical) |
| Bandwidth (Gaussian) | 60 MHz, gaussian to -12 dB |

Digital IQ output**Connector type** MDR (3M) 50 pin \times 2**Data output** Data is corrected for amplitude and phase response in real time

| Data format | Specification |
|-------------|---------------|
| I data | 16 bit LVDS |
| Q data | 16 bit LVDS |

Control output Clock: LVDS, 150 MHz - Acquisition Bandwidth >40 MHz, 50 MHz - Acquisition Bandwidth \leq 40 MHz, DV (Data Valid), MSW (Most Significant Word) indicators, LVDS**Control input** IQ data output enabled, connecting GND enables output of IQ data**Clock rising edge to data transition time (hold time)** 8.4 ns (typical, standard), 1.58 ns (typical, Opt. 110)**Data transition to clock rising edge (setup time)** 8.2 ns (typical, standard), 1.54 ns (typical, Opt. 110)**AM/FM/PM and direct audio measurements (Opt. 10)****Available displays** Audio spectrum, Audio measurements summary**Analog demodulation****Carrier frequency range (for modulation and audio measurements)** 9 kHz or $(1/2 \times \text{Audio Analysis Bandwidth})$ to maximum input frequency. Distortion and noise performance reduced below 30 MHz**Maximum audio frequency span** 10 MHz**Audio filters****Low pass (kHz)** 0.3, 3, 15, 30, 80, 300, and user-entered up to $0.9 \times$ audio bandwidth**High pass (Hz)** 20, 50, 300, 400, and user-entered up to $0.9 \times$ audio bandwidth**Standard** CCITT, C-Message**De-emphasis (μ s)** 25, 50, 75, 750, and user-entered**File** User-supplied .TXT or .CSV file of amplitude/frequency pairs. Maximum 1000 pairs**FM Modulation Analysis (Modulation Index >0.1)****FM measurements** Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise**Carrier power accuracy (10 MHz to 2 GHz, -20 to 0 dBm input power)** ± 0.85 dB

AM/FM/PM and direct audio measurements (Opt. 10)

| | |
|--|---|
| Carrier frequency accuracy (deviation: 1 to 10 kHz) | $\pm 0.5 \text{ Hz} + (\text{transmitter frequency} \times \text{reference frequency error})$ |
| FM deviation accuracy (rate: 1 kHz to 1 MHz) | $\pm (1\% \text{ of } (\text{rate} + \text{deviation}) + 50 \text{ Hz})$ |
| FM rate accuracy (deviation: 1 to 100 kHz) | $\pm 0.2 \text{ Hz}$ |

Residuals (FM) (rate: 1 to 10 kHz, deviation: 5 kHz)

| | |
|------------|-------|
| THD | 0.10% |
| Distortion | 0.7% |
| SINAD | 43 dB |

AM modulation analysis

| | |
|--|---|
| AM measurements | Carrier Power, Audio Frequency, Modulation Depth (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise |
| Carrier power accuracy (10 MHz to 2 GHz, -20 to 0 dBm input power) | $\pm 0.85 \text{ dB}$ |
| AM depth accuracy (rate: 1 to 100 kHz, depth: 10% to 90%) | $\pm 0.2\% + 0.01 \times \text{measured value}$ |
| AM rate accuracy (rate: 1 kHz to 1 MHz, depth: 50%) | $\pm 0.2 \text{ Hz}$ |

Residuals (AM) (rate: 1 to 100 kHz, depth: 50%)

| | |
|------------|-------|
| THD | 0.16% |
| Distortion | 0.13% |
| SINAD | 58 dB |

PM modulation analysis

| | |
|---|---|
| PM measurements | Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise |
| Carrier power accuracy (10 MHz to 2 GHz, -20 to 0 dBm input power) | $\pm 0.85 \text{ dB}$ |
| Carrier frequency accuracy (deviation: 0.628 rad) | $\pm 0.02 \text{ Hz} + (\text{transmitter frequency} \times \text{reference frequency error})$ |
| PM deviation accuracy (rate: 10 to 20 kHz, deviation: 0.628 to 6 rad) | $\pm 100\% \times (0.005 + (\text{rate} / 1 \text{ MHz}))$ |
| PM rate accuracy (rate: 1 to 10 kHz, deviation: 0.628 rad) | $\pm 0.2 \text{ Hz}$ |

Residuals (PM) (rate: 1 to 10 kHz, deviation: 0.628 rad)

| | |
|------------|-------|
| THD | 0.1% |
| Distortion | 1% |
| SINAD | 40 dB |

AM/FM/PM and direct audio measurements (Opt. 10)

| | |
|---|--|
| Direct audio input | Direct input (unmodulated) audio measurements are limited by the low-frequency input range of 9 kHz in the RSA6000 Series. |
| Audio measurements | Signal Power, Audio Frequency (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise |
| Direct input frequency range (for audio measurements only) | 9 kHz to 10 MHz |
| Maximum audio frequency span | 10 MHz |
| Audio frequency accuracy | ± 0.2 Hz |
| Signal power accuracy | ± 1.5 dB |

Residuals (rate: 10 kHz, input level: 1.0 V)

| | |
|-------------------|-------|
| THD | 0.1% |
| Distortion | 0.8% |
| SINAD | 42 dB |

Phase noise and jitter measurements (Opt. 11)

| | |
|---|---|
| Available displays | Phase noise vs. frequency, log-frequency scale |
| Carrier frequency range | 30 MHz to maximum instrument frequency – less selected frequency offset range |
| Measurements | Carrier power, Frequency error, RMS phase noise, Jitter (time interval error), Residual FM |
| Residual Phase Noise | See Phase noise specifications |
| Phase noise and jitter integration bandwidth range | Minimum offset from carrier: 10 Hz Maximum offset from carrier: 1 GHz |
| Number of traces | 2 |
| Trace and measurement functions | Detection: average or \pm Peak Smoothing Averaging Optimization: speed or dynamic range |

Settling time, frequency, and phase (Opt. 12) ¹⁷

| | |
|---------------------------|--|
| Available displays | Frequency settling vs. time, Phase settling vs. time |
|---------------------------|--|

¹⁷ Measured input signal level > -20 dBm, Attenuator: Auto.

Settling time, frequency, and phase (Opt. 12)

Settled frequency uncertainty, 95% confidence (typical), at stated measurement frequencies, bandwidths, and # of averages

Measurement frequency:
1 GHz

| Averages | Frequency uncertainty at stated measurement bandwidth | | | |
|--------------------|---|--------|-------|---------|
| | 110 MHz | 10 MHz | 1 MHz | 100 kHz |
| Single measurement | 2 kHz | 100 Hz | 10 Hz | 1 Hz |
| 100 averages | 200 Hz | 10 Hz | 1 Hz | 0.1 Hz |
| 1000 averages | 50 Hz | 2 Hz | 1 Hz | 0.05 Hz |

Measurement frequency:
10 GHz

| Averages | Frequency uncertainty at stated measurement bandwidth | | | |
|--------------------|---|--------|--------|---------|
| | 110 MHz | 10 MHz | 1 MHz | 100 kHz |
| Single measurement | 5 kHz | 100 Hz | 10 Hz | 5 Hz |
| 100 averages | 300 Hz | 10 Hz | 1 Hz | 0.5 Hz |
| 1000 averages | 100 Hz | 5 Hz | 0.5 Hz | 0.1 Hz |

Measurement frequency:
20 GHz

| Averages | Frequency uncertainty at stated measurement bandwidth | | | |
|--------------------|---|--------|--------|---------|
| | 110 MHz | 10 MHz | 1 MHz | 100 kHz |
| Single measurement | 2 kHz | 100 Hz | 10 Hz | 5 Hz |
| 100 averages | 200 Hz | 10 Hz | 1 Hz | 0.5 Hz |
| 1000 averages | 100 Hz | 5 Hz | 0.5 Hz | 0.2 Hz |

Settled phase uncertainty, 95% confidence (typical), at stated measurement frequencies, bandwidths, and # of averages

Measurement frequency:
1 GHz

| Averages | Phase uncertainty at stated measurement bandwidth | | |
|--------------------|---|--------|-------|
| | 110 MHz | 10 MHz | 1 MHz |
| Single measurement | 1.00° | 0.50° | 0.50° |
| 100 averages | 0.10° | 0.05° | 0.05° |
| 1000 averages | 0.05° | 0.01° | 0.01° |

Measurement frequency:
10 GHz

| Averages | Phase uncertainty at stated measurement bandwidth | | |
|--------------------|---|--------|-------|
| | 110 MHz | 10 MHz | 1 MHz |
| Single measurement | 1.5° | 1.00° | 0.50° |
| 100 averages | 0.20° | 0.10° | 0.05° |
| 1000 averages | 0.10° | 0.05° | 0.02° |

Measurement frequency:
20 GHz

| Averages | Phase uncertainty at stated measurement bandwidth | | |
|--------------------|---|--------|-------|
| | 110 MHz | 10 MHz | 1 MHz |
| Single measurement | 1.00° | 0.50° | 0.50° |
| 100 averages | 0.10° | 0.05° | 0.05° |
| 1000 averages | 0.05° | 0.02° | 0.02° |

Advanced measurement suite (Opt. 20)

| | |
|-----------------------------------|--|
| Available displays | Pulse results table, Pulse trace (selectable by pulse number), Pulse statistics (trend of pulse results, FFT of trend, and histogram) |
| Measurements | Average on power, Peak power, Average transmitted power, Pulse width, Rise time, Fall time, Repetition interval (seconds), Repetition rate (Hz), Duty factor (%), Duty factor (ratio), Ripple (dB), Ripple (%), Droop (dB), Droop (%), Overshoot (dB), Overshoot (%), Pulse-Pulse frequency difference, Pulse-Pulse phase difference, RMS frequency error, Max frequency error, RMS phase error, Max phase error, Frequency deviation, Phase deviation, Impulse response (dB), Impulse response (time), Time stamp |
| Minimum pulse width for detection | 150 ns (standard), 50 ns (Opt. 110) |
| Number of pulses | 1 to 10,000 |
| System rise time (typical) | <25 ns (standard), <10 ns (Opt. 110) |
| Pulse measurement accuracy | Signal conditions: Unless otherwise stated, pulse width >450 ns (150 ns, Opt. 110), S/N ratio ≥30 dB, duty cycle 0.5 to 0.001, temperature 18 °C to 28 °C |
| Impulse response | Measurement range: 15 to 40 dB across the width of the chirp Measurement accuracy (typical): ±2 dB for a signal 40 dB in amplitude and delayed 1% to 40% of the pulse chirp width ¹⁸ |
| Impulse response waiting | Taylor window |

Pulse measurement performance

| Pulse amplitude and timing | Measurement | Accuracy (Typical) |
|----------------------------|---|---------------------------------------|
| | Average On Power ¹⁹ | ±0.3 dB + absolute amplitude accuracy |
| | Average Transmitted Power ²⁰ | ±0.4 dB + absolute amplitude accuracy |
| | Peak Power ²¹ | ±0.4 dB + absolute amplitude accuracy |
| | Pulse Width | ±3% of reading |
| | Duty Factor | ±3% of reading |

Frequency and phase error referenced to nonchirped signal At stated frequencies and measurement bandwidths, ²² typical.

20 MHz bandwidth

| Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
|------------------|---------------------|------------------|-------------------|
| 2 GHz | ±5 kHz | ±13 kHz | ±0.3° |
| 10 GHz | ±5 kHz | ±40 kHz | ±0.6° |
| 20 GHz | ±8 kHz | ±60 kHz | ±1.3° |

40 MHz bandwidth

| Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
|------------------|---------------------|------------------|-------------------|
| 2 GHz | ±10 kHz | ±30 kHz | ±.35° |
| 10 GHz | ±10 kHz | ±50 kHz | ±0.75° |
| 20 GHz | ±20 kHz | ±60 kHz | ±1.3° |

¹⁸ Chirp width 100 MHz, pulse width 10 μs, minimum signal delay 1% of pulse width or 10/(chirp bandwidth), whichever is greater, and minimum 2000 sample points during pulse on-time.

¹⁹ Pulse Width >300 ns (100 ns, Opt. 110).

²⁰ Pulse Width >300 ns (100 ns, Opt. 110).

²¹ Pulse Width >300 ns (100 ns, Opt. 110).

²² Pulse ON Power ≥ -20 dBm, signal peak at Reference Level, Attenuator = Auto, $t_{\text{meas}} - t_{\text{reference}} \leq 10$ ms, Frequency Estimation: Manual. Pulse-to-Pulse Measurement time position excludes the beginning and ending of the pulse extending for a time = (10 / Measurement BW) as measured from 50% of the t_{rise} or t_{fall} . Absolute Frequency Error determined over center 50% of pulse.

Pulse measurement performance

| 60 MHz bandwidth (Opt. 110) | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
|---|------------------|---------------------|------------------|-------------------|
| | 2 GHz | ±30 kHz | ±70 kHz | ±0.5° |
| | 10 GHz | ±30 kHz | ±150 kHz | ±0.75° |
| | 20 GHz | ±50 kHz | ±275 kHz | ±1.5° |
| 110 MHz bandwidth (Opt. 110) | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
| | 2 GHz | ±50 kHz | ±170 kHz | ±0.6° |
| | 10 GHz | ±50 kHz | ±150 kHz | ±0.75° |
| | 20 GHz | ±100 kHz | ±300 kHz | ±1.5° |
| Frequency and phase error referenced to a linear chirp | | | | |
| At stated frequencies and measurement bandwidths ²³ , typical. Signal type: Linear Chirp, Peak-to-Peak Chirp Deviation: ≤0.8 Measurement BW. | | | | |
| 20 MHz bandwidth | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
| | 2 GHz | ±10 kHz | ±25 kHz | ±0.4° |
| | 10 GHz | ±15 kHz | ±30 kHz | ±0.9° |
| | 20 GHz | ±25 kHz | ±50 kHz | ±1.8° |
| 40 MHz bandwidth | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
| | 2 GHz | ±12 kHz | ±40 kHz | ±0.4° |
| | 10 GHz | ±15 kHz | ±50 kHz | ±1.0° |
| | 20 GHz | ±30 kHz | ±130 kHz | ±2.0° |
| 60 MHz bandwidth (Opt. 110) | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
| | 2 GHz | ±60 kHz | ±130 kHz | ±0.5° |
| | 10 GHz | ±60 kHz | ±150 kHz | ±1.0° |
| | 20 GHz | ±75 kHz | ±200 kHz | ±2.0° |
| 110 MHz bandwidth (Opt. 110) | Center frequency | Abs. freq err (RMS) | Pulse-pulse freq | Pulse-pulse phase |
| | 2 GHz | ±75 kHz | ±275 kHz | ±0.6° |
| | 10 GHz | ±75 kHz | ±300 kHz | ±1.0° |
| | 20 GHz | ±125 kHz | ±500 kHz | ±2.0° |

Digital modulation analysis (Opt. 21)

| | |
|---------------------|---|
| Available displays | Constellation diagram, EVM vs. time, Symbol table (binary or hexadecimal), Magnitude and phase error versus time, and signal quality, Demodulated IQ vs. time, Eye diagram, Trellis diagram, Frequency deviation vs. time |
| Modulation formats | $\pi/2$ DBPSK, BPSK, SBPSK, QPSK, DQPSK, $\pi/4$ DQPSK, D8PSK, D16PSK, 8PSK, OQPSK, SOQPSK, CPM, 16/32-APSK, 16/32/64/128/256QAM, MSK, GMSK, 2-FSK, 4-FSK, 8-FSK, 16-FSK, C4FM |
| Analysis period | Up to 80,000 samples |
| Filter types | |
| Measurement filters | Square-root raised cosine, Raised cosine, Gaussian, Rectangular, IS-95, IS-95 EQ, C4FM-P25, Half-sine, None, User defined |
| Reference filters | Raised cosine, Gaussian, Rectangular, IS-95, SBPSK-MIL, SOQPSK-MIL, SOQPSK-ARTM, none, user defined |
| Alpha/B*T range | 0.001 to 1, 0.001 step |

²³ Pulse ON Power ≥ -20 dBm, signal peak at Reference Level, Attenuator = Auto, $t_{\text{meas}} - t_{\text{reference}} \leq 10$ ms, Frequency Estimation: Manual. Pulse-to-Pulse Measurement time position excludes the beginning and ending of the pulse extending for a time = $(10 / \text{Measurement BW})$ as measured from 50% of the $t_{\text{(rise)}}$ or $t_{\text{(fall)}}$. Absolute Frequency Error determined over center 50% of pulse.

Digital modulation analysis (Opt. 21)

| | |
|--------------------------|---|
| Measurements | Constellation, Error vector magnitude (EVM) vs. Time, Modulation error ratio (MER), Magnitude error vs. Time, Phase error vs. Time, Signal quality, Symbol table, Rho FSK only: Frequency deviation, Symbol timing error |
| Symbol rate range | 1 kS/s to 100 MS/s (modulated signal must be contained entirely within acquisition BW of the instrument) |

Digital (Opt. 21)**QPSK residual EVM (typical)²⁴**

| | |
|--------------------|-------|
| 100 kS/s | <0.5% |
| 1 MS/s | <0.5% |
| 10 MS/s | <0.6% |
| 30 MS/s | <1.5% |
| 80 MS/s (Opt. 110) | <2.0% |

256 QAM residual EVM (typical)²⁵

| | |
|--------------------|-------|
| 10 MS/s | <0.5% |
| 30 MS/s | <0.8% |
| 80 MS/s (Opt. 110) | <0.8% |

Offset QPSK residual EVM (typical)²⁶

| | |
|----------|-------|
| 100 kS/s | <0.5% |
| 1 MS/s | <0.5% |
| 10 MS/s | <1.4% |

S-OQPSK (MIL, ARTM) residual EVM (typical)²⁷

| | |
|----------------------|-------|
| 4 kS/s, CF = 250 MHz | <0.5% |
| 20 kS/s | <0.5% |
| 100 kS/s | <0.5% |
| 1 MS/s | <0.5% |

S-BPSK (MIL) residual EVM (typical)²⁸

| | |
|----------------------|-------|
| 4 kS/s, CF = 250 MHz | <0.4% |
| 20 kS/s | <0.5% |
| 100 kS/s | <0.5% |
| 1 MS/s | <0.5% |

²⁴ CF = 2 GHz, Measurement Filter = root raised cosine, Reference Filter = raised cosine, Analysis Length = 200 symbols.

²⁵ CF = 2 GHz, Measurement Filter = root raised cosine, Reference Filter = raised cosine, Analysis Length = 400 symbols.

²⁶ CF = 2 GHz, Measurement Filter = root raised cosine, Reference Filter = raised cosine, Analysis Length = 400 symbols.

²⁷ CF = 2 GHz unless otherwise noted. Reference Filters: MIL STD, ARTM, Measurement Filter: none.

²⁸ CF = 2 GHz unless otherwise noted. Reference Filter: MIL STD.

Digital (Opt. 21)

CPM (MIL) residual EVM (typical)²⁹

| | |
|----------------------|-------|
| 4 kS/s, CF = 250 MHz | <0.5% |
| 20 kS/s | <0.5% |
| 100 kS/s | <0.5% |
| 1 MS/s | <0.5% |

2/4/8/16 FSK residual RMS FSK error (typical)³⁰

| | |
|---------------------------|-------|
| 10 kS/s, deviation 10 kHz | <0.6% |
|---------------------------|-------|

Adaptive equalizer characteristics

| | |
|---|--|
| Type | Linear, decision-directed, feed-forward (FIR) equalizer with co-efficient adaptation and adjustable convergence rate |
| Modulation types supported | BPSK, QPSK, OQPSK, $\pi/2$ DBPSK, $\pi/4$ DQPSK, 8PSK, 8DPSK, 16DPSK, 16/32/64/128/256QAM |
| Reference filters for all modulation types except OQPSK | Raised cosine, rectangular, none |
| Reference filters for OQPSK | Raised cosine, half sine |
| Filter length | 3 to 2001 taps |
| Taps/Symbol: raised cosine, half sine | 1, 2, 4, 8 |
| Taps/Symbol: rectangular filter, no filter | 1 |
| Equalizer controls | Off, train, hold, reset |

Flexible OFDM characteristics (Opt. 22)

| | |
|-----------------------------|---|
| Available displays | Constellation, scalar measurement summary, EVM or power vs. carrier, symbol table (binary or hexadecimal) |
| Recallable standards | WiMAX 802.16-2004, WLAN 802.11a/g/j/p |
| Parameter settings | Guard interval, subcarrier spacing, channel bandwidth |
| Advanced parameter settings | Constellation detect: auto; manual select (BPSK, QPSK, 16QAM, 64QAM) Symbol analysis offset: (–100% to 0%) Pilot tracking: phase, amplitude, Timing Swap I and Q: Enable/Disable |
| Summary measurements | Symbol clock error, frequency error, average power, Peak-to-Average, CPE EVM (RMS and peak) for all carriers, pilot carriers, data carriers OFDM parameters: number of symbols, frequency error, symbol clock error, IQ origin offset, CPE, average power, Peak-to-Average Power EVM (RMS and peak) for all subcarriers, pilot subcarriers, data subcarriers |

²⁹ CF = 2 GHz unless otherwise noted. Reference Filter: MIL STD.

³⁰ CF = 2 GHz. Reference Filter: None, Measurement Filter: None.

Flexible OFDM characteristics (Opt. 22)

| | |
|-----------------|---|
| Displays | EVM vs. Symbol, vs. Subcarrier |
| | Subcarrier Power vs. Symbol, vs. Subcarrier |
| | Subcarrier Constellation |
| | Symbol Data Table |
| | Mag Error vs. Symbol, vs. Subcarrier |
| | Phase Error vs. Symbol, vs. Subcarrier |
| | Channel Frequency Response |

| | |
|---------------------|---|
| Residual EVM | -44 dB (WiMAX 802.16-2004, 5 MHz BW) |
| | -44 dB (WLAN 802.11g, 20 MHz BW) |
| | Signal input power optimized for best EVM |

WLAN IEEE802.11a/b/g/j/p (Opt. 23)**General characteristics**

| | |
|--|--|
| Modulation formats | DBPSK (DSSS1M), DQPSK (DSSS2M), CCK5.5M, CCK11M, OFDM (BPSK, QPSK, 16 or 64QAM) |
| Measurements and displays | Burst Index, Burst Power, Peak to Average Burst Power, IQ Origin Offset, Frequency Error, Common Pilot Error, Symbol Clock Error |
| | RMS and Peak EVM for Pilots/Data, Peak EVM located per Symbol and Subcarrier |
| | Packet Header Format Information |
| | Average Power and RMS EVM per section of the header |
| | WLAN Power vs. Time, WLAN Symbol Table, WLAN Constellation |
| | Spectrum Emission Mask, Spurious |
| | Error Vector Magnitude (EVM) vs. Symbol (or Time), vs. Subcarrier (or Frequency) |
| | Mag Error vs. Symbol (or Time), vs. Subcarrier (or Frequency) |
| | Phase Error vs. Symbol (or Time), vs. Subcarrier (or Frequency) |
| | WLAN Channel Frequency Response vs. Symbol (or Time), vs. Subcarrier (or Frequency) |
| | WLAN Spectral Flatness vs. Symbol (or Time), vs. Subcarrier (or Frequency) |
| | RMS-EVM over 1000 chips, EQ On; 2.4 GHz: 1.1% (-39.3 dB), typical, 0.95% (-40.5 dB) typical-mean |
| | Signal input power optimized for best EVM |
| Residual EVM - 802.11b (CCK-11Mbps) | |
| Residual EVM - 802.11a/g/j (OFDM, 20 MHz, 64-QAM) | 2.4 GHz: -49 dB; 5.8 GHz: -48 dB typical, -49 dB typical-mean; (RMS-EVM averaged over 20 bursts, 16 symbols each) |
| | Signal input power optimized for best EVM |

WLAN IEEE802.11n (Opt. 24)

General characteristics

| | |
|--|--|
| Modulation formats | SISO, OFDM (BPSK, QPSK, 16 or 64QAM) |
| Measurements and displays | <p>Burst Index, Burst Power, Peak to Average Burst Power, IQ Origin Offset, Frequency Error, Common Pilot Error, Symbol Clock Error,</p> <p>RMS and Peak EVM for Pilots/Data, Peak EVM located per Symbol and Subcarrier</p> <p>Packet Header Format Information</p> <p>Average Power and RMS EVM per section of the header</p> <p>WLAN Power vs. Time, WLAN Symbol Table, WLAN Constellation</p> <p>Spectrum Emission Mask, Spurious</p> <p>Error Vector Magnitude (EVM) vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>Mag Error vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>Phase Error vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>WLAN Channel Frequency Response vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>WLAN Spectral Flatness vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> |
| Residual EVM - 802.11n (802.11n EVM (40 MHz, 64-QAM)) | <p>–45 dB typical, –47 dB typical-mean (5.8GHz, RMS-EVM averaged over 20 bursts, 16 symbols each)</p> <p>Signal input power optimized for best EVM</p> |

WLAN IEEE802.11ac (Opt. 25)

General characteristics

| | |
|--|--|
| Modulation formats | SISO, OFDM (BPSK, QPSK, 16, 64, 256QAM) |
| Measurements and displays | <p>Burst Index, Burst Power, Peak to Average Burst Power, IQ Origin Offset, Frequency Error, Common Pilot Error, Symbol Clock Error,</p> <p>RMS and Peak EVM for Pilots/Data, Peak EVM located per Symbol and Subcarrier</p> <p>Packet Header Format Information</p> <p>Average Power and RMS EVM per section of the header</p> <p>WLAN Power vs. Time, WLAN Symbol Table, WLAN Constellation</p> <p>Spectrum Emission Mask, Spurious</p> <p>Error Vector Magnitude (EVM) vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>Mag Error vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>Phase Error vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>WLAN Channel Frequency Response vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> <p>WLAN Spectral Flatness vs. Symbol (or Time), vs. Subcarrier (or Frequency)</p> |
| Residual EVM - 802.11ac (256-QAM) | <p>–42 dB typical, –44.6 dB typical-mean (5.8 GHz, 80 MHz RMS-EVM averaged over 20 bursts, 16 symbols each) Signal input power optimized for best EVM</p> |

Modulation analysis accuracy

| | |
|---------------------------------|--|
| AM demodulation accuracy | $\pm 2\%$ 0 dBm input at center Carrier frequency 1 GHz, 10 to 60% modulation depth, 1 kHz/5 kHz Input/Modulated frequency |
| PM demodulation accuracy | $\pm 3^\circ$ 0 dBm input at center Carrier frequency 1 GHz, 400 hz/1 kHz Input/Modulated frequency |
| FM demodulation accuracy | $\pm 1\%$ of span 0 dBm input at center Carrier frequency 1 GHz, 1 kHz/5 kHz Input/Modulated frequency |

Inputs and outputs

Front panel

| | |
|---|--|
| Display | Touch panel, 10.4 in. (264 mm) |
| Planar crown™ RF input connector | Type-N Female (RSA6106B and RSA6114B) 3.5 mm Male (RSA6120B only) SMA (m) to SMA (f) adapter (RSA6120B only) |
| Trigger out | BNC, High: >2.0 V, Low: <0.4 V, output current 1 mA (LVTTTL), 50 Ω |
| Trigger in | BNC, 50 Ω /5 k Ω impedance (nominal), ± 5 V max input, -2.5 V to +2.5 V trigger level |
| USB ports | 1 USB 2.0, 1 USB 1.1 |
| Audio | Speaker |

Rear panel

| | |
|--|---|
| 10 MHz REF OUT | 50 Ω , BNC, >0 dBm |
| External REF IN | 50 Ω , BNC, -10 dBm - +6 dBm, 1 to 25 MHz in 1 MHz steps, plus 1.2288, 4.8, 19.6608, and 31.07 MHz |
| External REF IN frequency accuracy required | $\leq \pm 0.3$ ppm |
| Trig 2 / gate IN | BNC, High: 1.6 to 5.0 V, Low: 0 to 0.5 V |
| GPIO interface | IEEE 488.2 |
| LAN interface ethernet | Rj45, 10/100/1000base-t |
| USB ports | USB 2.0, two ports |
| VGA output | VGA compatible, 15 DSUB |
| Audio out | 3.5 mm headphone jack |
| Noise source drive | BNC, +28 v, 140 mA (nominal) |

General characteristics

| | |
|---|--|
| Temperature range | |
| Operating | +5 °C to +50 °C. (+5 °C to +40 °C when accessing DVD) |
| Storage | -20 °C to +60 °C |
| Warm-up time | |
| 20 minutes | |
| Altitude | |
| Operating | Up to 3000 m (approximately 10,000 ft.) |
| Nonoperating | Up to 12,190 m (40,000 ft.) |
| Relative humidity | |
| Operating and nonoperating | 90% RH at 30 °C |
| 80% RH max when accessing DVD | No condensation, max wet bulb, 29 °C |
| Vibration | |
| Operating (except when equipped with option 56 removable HDD, or when accessing DVD/CD) | 0.22G _{RMS} . Profile = 0.00010 g ² /Hz at 5-350 Hz, -3 dB/Octave slope from 350-500 Hz, 0.00007 g ² /Hz at 500 Hz, 3 Axes at 10 min/axis |
| Nonoperating | 2.28G _{RMS} . Profile = 0.0175 g ² /Hz at 5-100 Hz, -3 dB/Octave slope from 100-200 Hz, 0.00875 g ² /Hz at 200-350 Hz, -3 dB/Octave slope from 350-500 Hz, 0.006132 g ² /Hz at 500 Hz, 3 Axes at 10 min/axis |
| Shock | |
| Operating | 15 G, half-sine, 11 ms duration. (1 G max when accessing DVD and Opt. 56 Removable HDD) |
| Non-operating | 30 g, half-sine, 11 ms duration |
| Safety | |
| L 61010-1:2004 | |
| CSA C22.2 No.61010-1-04 | |
| Electromagnetic compatibility | |
| Complies with EU council EMC directive 2004/108/EC | |
| Complies with EN61326, Class A | |
| Power requirements | |
| 90 V AC to 240 V AC, 50 Hz to 60 Hz | |
| 90 V AC to 132 V AC, 400 Hz | |
| Power consumption | |
| 450 W max | |
| Data storage | |
| Internal HDD, USB ports, DVD±RW (Opt. 59), Removable HDD (Opt. 56) | |
| Calibration interval | |
| One year | |
| Warranty | |
| One year | |
| GPIB | |
| SCPI-compatible, IEEE488.2 compliant | |

Physical characteristics

Dimensions

| | | |
|--------|-----|------|
| Height | mm | in |
| | 282 | 11.1 |
| Width | 473 | 18.6 |
| Depth | 531 | 20.9 |

Weight

| | | |
|------------------|------|----|
| With all options | kg | lb |
| | 26.4 | 58 |

Ordering information

Models

| | |
|-----------------|--|
| RSA6106B | Spectrum analyzer, 9 kHz to 6.2 GHz, 40 MHz capture BW |
| RSA6114B | Spectrum analyzer, 9 kHz to 14 GHz, 40 MHz capture BW |
| RSA6120B | Spectrum analyzer, 9 kHz to 20 GHz, 40 MHz capture BW |

Note: Please specify power plug and language options when ordering.

Standard accessories

Accessories

| | |
|--------------------------------|---|
| All instruments include | Product documentation CD (Quick-start user manual, Application examples manual, Printable online help, Programmer manual, Service manual, Specification and Performance Verification manual, Declassification and Security instructions), Front cover, USB keyboard, USB mouse, and Planar crown™ RF input connector – Type-N (RSA6106B and RSA6114B) / 3.5 mm (RSA6120B only) / SMA (m) to SMA (f) adapter (RSA6120B only) |
|--------------------------------|---|

Warranty

One-year warranty

Options ^{31 32}

| Option | Description |
|---------|--|
| Opt. 05 | Digital IQ Output and 500 MHz Analog IF Output |
| Opt. 09 | Enhanced Real Time |
| Opt. 10 | AM/FM/PM Modulation and Audio Measurements |
| Opt. 11 | Phase Noise and Jitter Measurement |
| Opt. 12 | Settling Time Measurements (Frequency and Phase) |
| Opt. 20 | Advanced Signal Analysis (including pulse measurements) |
| Opt. 21 | General Purpose Digital Modulation Analysis |
| Opt. 22 | Flexible OFDM |
| Opt. 23 | WLAN 802.11a/b/g/j/p measurement application |
| Opt. 24 | WLAN 802.11n measurement application (requires opt 23) |
| Opt. 25 | WLAN 802.11ac measurement application (requires opt 24) |
| Opt. 50 | Preamp, 1 MHz - 6.2 GHz, 20 dB Gain (RSA6106B only) |
| Opt. 51 | Preamp, 100 kHz - 20 GHz, 30 dB Gain (RSA6114B and RSA6120B only) |
| Opt. 52 | Frequency Mask Trigger |
| Opt. 53 | Memory Extension, 4 GB Total Acquisition Memory |
| Opt. 56 | Removable SSHD (160 GB SS), incompatible with Option 57, 59, WINXP |
| Opt. 57 | CD/DVD-RW and Fixed Internal HDD (160 GB) incompatible with Option 56, 59, WINXP |
| Opt. 59 | Internal HDD (160 GB), incompatible with Option 56, 57, WINXP |

³¹ Options 56, 57, 59, and WinXP are mandatory/exclusive options - one of them must be ordered. There is no charge for Option 59, Internal HDD.

³² Options 10, 11, 12, 20, 21, 22, 52, and 110 are SW only. All other options are HW.

| Option | Description |
|--------------|--------------------|
| Opt. 110 | 110 MHz Capture BW |
| Opt. RSA56KR | Rackmount |

Power plug options

| | |
|----------|--|
| Opt. A0 | North America power plug (115 V, 60 Hz) |
| Opt. A1 | Universal Euro power plug (220 V, 50 Hz) |
| Opt. A2 | United Kingdom power plug (240 V, 50 Hz) |
| Opt. A3 | Australia power plug (240 V, 50 Hz) |
| Opt. A4 | North America power plug (240 V, 50 Hz) |
| Opt. A5 | Switzerland power plug (220 V, 50 Hz) |
| Opt. A6 | Japan power plug (100 V, 110/120 V, 60 Hz) |
| Opt. A10 | China power plug (50 Hz) |
| Opt. A11 | India power plug (50 Hz) |
| Opt. A12 | Brazil power plug (60 Hz) |
| Opt. A99 | No power cord |

Language options

| | |
|----------|---------------------------|
| Opt. L0 | English manual |
| Opt. L5 | Japanese manual |
| Opt. L7 | Simplified Chinese manual |
| Opt. L10 | Russian manual |
| Opt. L99 | No manual |

Language options include translated front-panel overlay for the selected language(s).

Service options

| | |
|----------|--|
| Opt. C3 | Calibration Service 3 Years |
| Opt. C5 | Calibration Service 5 Years |
| Opt. CA1 | Single Calibration or Functional Verification |
| Opt. D1 | Calibration Data Report |
| Opt. D3 | Calibration Data Report 3 Years (with Opt. C3) |
| Opt. D5 | Calibration Data Report 5 Years (with Opt. C5) |
| Opt. G3 | Complete Care 3 Years (includes loaner, scheduled calibration, and more) |
| Opt. G5 | Complete Care 5 Years (includes loaner, scheduled calibration, and more) |
| Opt. R3 | Repair Service 3 Years (including warranty) |
| Opt. R5 | Repair Service 5 Years (including warranty) |

Recommended accessories

| Accessory | Description |
|--|---|
| RTPA2A | Spectrum Analyzer Probe Adapter Compatibility: P7225 - 2.5 GHz Active Probe P7240 - 4 GHz Active Probe P7260 - 6 GHz Active Probe P7330 - 3.5 GHz Differential Probe P7350 - 5 GHz Differential Probe P7350SMA - 5 GHz Differential SMA Probe P7340A - 4 GHz Z-Active Differential Probe P7360A - 6 GHz Z-Active Differential Probe P7380A - 8 GHz Z-Active Differential Probe P7380SMA - 8 GHz Differential Signal Acquisition System P7313 - >12.5 GHz Z-Active Differential Probe P7313SMA - 13 GHz Differential SMA Probe P7500 Series - 4 GHz to 20 GHz TriMode Probes |
| K420 | Stable/Mobile instrument cart |
| 119-4146-xx | E and H near-field probes. For EMI troubleshooting |
| 065-0906-xx | Additional removable hard drive (160 GB solid state). For use with option 56 (Windows 7 and instrument FW preinstalled) |
| 016-2026-xx | Transit case |
| 071-1909-xx | Additional quick-start manual (paper) |
| 071-1914-xx | Service manual (paper) |
| 119-7902-xx | DC Block, Type-N, 10 MHz to 18 GHz (blocks both center and shield) |
| 131-4329-00 | Planar crown RF input connector - 7005A-3 Type-N female |
| 131-9062-00 | Planar crown RF input connector - 7005A-6 3.5 mm female |
| 131-8822-00 | Planar crown RF input connector - 7005A-7 3.5 mm male |
| 131-8689-00 | Planar crown RF input connector - 7005A-1 SMA female |
| 015-0369-00 | RF adapter - n (male) to SMA (male) |
| 119-6599-00 | Power attenuator - 20 dB, 50 w, 5 GHz |
| 119-6598-00 | DC block, Type-N, 10 MHz to 12.4 GHz (blocks both center and shield) |
| 101A EMC Probe Set 150A EMC Probe Amplifier 110A Probe Cable SMA Probe Adapter BNC Probe Adapter | RF probes. Contact Beehive Electronics to order: http://beehive-electronics.com/probes.html |
| 174-5706-xx | SMA (m) to SMA (m) 36 in. cable |

Upgrades

RSA6UP

| Option | Description | HW or SW | Factory calibration required? |
|-----------|---|----------|-------------------------------|
| Opt. 05 | 500 MHz IF, Digital IQ Output | HW | No |
| Opt. 09 | Enhanced Real Time | SW | No |
| Opt. 10 | AM/FM/PM Modulation and Audio Measurements | SW | No |
| Opt. 11 | Phase Noise and Jitter Measurements | SW | No |
| Opt. 12 | Frequency and Phase Settling Measurements | SW | No |
| Opt. 20 | Advanced Signal Analysis (Pulse Measurement Suite) | SW | No |
| Opt. 21 | GP Digital Modulation Analysis | SW | No |
| Opt. 22 | Flexible OFDM Analysis | SW | No |
| Opt. 23 | WLAN 802.11a/b/g/j/p measurement application | SW | No |
| Opt. 24 | WLAN 802.11n measurement application (requires opt 23) | SW | No |
| Opt. 25 | WLAN 802.11ac measurement application (requires opt 24) | SW | No |
| Opt. 50 | Preamp, 1 MHz - 6.2 GHz, 20 dB Gain (RSA6106B only) | HW | Yes |
| Opt. 51 | Preamp, 100 kHz - 20 GHz, 30 dB Gain (RSA6114B and RSA6120B only) | HW | Yes |
| Opt. 52 | Frequency Mask Trigger | SW | No |
| Opt. 53 | Memory Extension, 4 GB Total Acquisition Memory | HW | No |
| Opt. 56 | Removable SSHD (160 GB), incompatible with Option 57, 59, WINXP | HW | No |
| Opt. 57 | CD/DVD-RW and Fixed Internal HDD (160 GB) incompatible with Option 56, 59, WINXP | HW | No |
| Opt. 59 | Internal HDD (160 GB), incompatible with Option 56, 57, WINXP | HW | No |
| Opt. 110 | 110 MHz Real-time Acquisition BW | SW | No |
| Opt. WIN7 | Upgrade RSA6120B Option WINXP to have Windows 7 OS on instrument. Incompatible with Option 56, 57, 59 | SW | No |



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea 001 800 8255 2835
Spain 00800 2255 4835*
Taiwan 886 (2) 2722 9622

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 April 2013

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



29 Oct 2013

37W-28055-4

www.tektronix.com

Tektronix