

Keysight N1913A and N1914A EPM Series Power Meters E-Series and 8480 Series Power Sensors

Data Sheet



Table of Contents

Do More With New-Generation EPM Series Power Meters.....03

Using EPM Series with BenchVue Software.....03

Take a Closer Look04

N1913A/14A EPM Series Power Meter: Applications and Compatible Sensors
for Average Power Measurements05

N1913A/14A EPM Series Power Meters Performance Characteristics06

N1913A/14A EPM Series Power Meters Ordering Information 12

E-Series Power Sensor Specifications..... 13

E-Series CW Power Sensor Specifications..... 13

Power linearity..... 15

E-Series E9300 Average Power Sensor Specifications..... 16

848xD Series Diode and 8483A Thermocouple Power Sensor Specifications22

N8480 Series Thermocouple Power Sensor Specifications..... 24

U2000 Series USB Power Sensor Specifications27

Do More With New-Generation EPM Series Power Meters

- Get up to four channels ¹ to speed and simplify RF average power measurements
- Measure faster with improved measurement speed of 400 readings/sec with the Keysight Technologies, Inc. E-Series sensors
- View test results more easily with the industry's first color LCD readout in an average power meter
- Go beyond GPIB with USB and LAN/LXI-C interfaces
- Automate frequency/power sweep measurements with the optional external trigger in/out feature
- Confirm battery power with a single-button push ² – and get extra operating time with the optional spare battery
- Easily replace existing 436A, 437B and 438A meters with optional 43x code compatibility ³
- Enhance manufacturing test by connecting a large external monitor with the unique VGA output option

1. Additional two optional USB channels available (see Ordering Information, page 10).

2. Only applicable for models with battery option (see Ordering Information, page 10).

3. N1913A is backward compatible with the 436A and 437B, while N1914A is compatible with 438A.

As signals become more complex, it becomes more difficult to make fast, accurate power measurements. For years, you've depended on Keysight's EPM Series power meters. Today, the Keysight N1913A and N1914A EPM Series power meters are versatile, user-friendly replacements for the discontinued E4418B/19B EPM Series. Best of all, you get these extras for about the same price. Get consistent results and greater capability—with the new EPM Series power meters.

Using EPM Series with BenchVue Software

The EPM Series is supported by the Keysight BenchVue software's BV0007B Power Meter/Sensor Control and Analysis app. Keysight BenchVue software for the PC accelerates testing by providing intuitive, multiple instrument measurement visibility and data capture with no programming necessary. You can derive answers faster than ever by easily viewing, capturing and exporting measurement data and screen shots.

For more information, www.keysight.com/find/BenchVue

Essential specifications

- Supports all average power sensors and their frequency range. The power range depends on the connected power sensor.
- Measurement speed: Up to 400 readings/sec with E-Series sensors
- Absolute accuracy: ± 0.02 dB logarithmic, $\pm 0.5\%$ linear
- Relative accuracy: ± 0.04 dB logarithmic, $\pm 1\%$ linear

Industry's first high-resolution color LCD in an average power meter

Soft keys provide menu selection

Arrow keys and Select allow positioning of the cursor for character selection and editing

Numeric keypad

Run/Stop enables single-shot measurements

Cal enables fully automatic digital zeroing (corrected for residual offsets) and fully automatic sensor calibration

Power reference (0 dBm, 50 MHz)

Channel A&B sensor connectors

USB port for additional sensor connection (Optional)

Hard keys provide quick access to the most frequently used functions, such as Trigger and Acquisition

Display keys select the display format for the active window (single/split screen)

The image shows the rear panel of a grey DC recorder. It features several connectors and labels:

- Top Left:** Three circular connectors labeled 'Power Ref', 'A', and 'B'. A red box highlights them with the label 'Rear-panel sensor and Power Ref connectors provide an option to replace front-panel connectors'.
- Top Center:** Two BNC connectors labeled '1' and '2' under the heading 'DC recorder outputs (0-1 V)'.
- Top Right:** A large IEC power inlet with a label 'LINE' and voltage specifications: '100-240 VAC 50-60 Hz', '100-250 VAC 40-150 W', '70 VA MAX'. A red line points to it with the label 'Line power accepts voltage with automatic range selection'.
- Middle Left:** Two BNC connectors labeled 'Trig Out' and 'Trig In'. A red box highlights them with the label 'Trigger in and out connectors (for automated power or frequency sweep function) (Optional)'.
- Middle Center:** A blue 15-pin D-sub connector labeled 'VGA output (Optional)'.
- Middle Right:** A USB Type-A port labeled 'USB port for additional sensor connection (Optional)'.
- Bottom Center:** An RJ45 LAN port labeled 'LAN port'.
- Bottom Right:** A 25-pin D-sub connector labeled 'GPIB connector'.
- Bottom Left:** A USB Type-B port labeled 'USB port'.

 A warning label at the bottom reads: 'WARNING: For continued fire protection, use specified ~ line fuse.'

N1913A/14A EPM Series Power Meter: Applications and Compatible Sensors for Average Power Measurements

Signal characteristics >	CW	Modulated		Wireless standards					
	CW	Pulse/ averaged	AM/FM profiled	Mobile phone			WLAN	WPAN	WMAN
Typical application examples >	Metrology lab	Radar/ navigation	Mobile radio	GSM	cdma®2000	3G	802.11a	Bluetooth®	WiMax™
				EDGE	cdmaONE	HSPA	802.11b	RFID	Wibro
				GPRS	IDEN	LTE	802.11g	ZigBee	
							802.11n		
Thermocouple sensors: 8480A/B/H, N8480A/B/H, R/Q8486A, N8486AR/AQ ¹	■	■	■	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only
Diode sensors: 8480D, V8486A, W8486A ¹	■	■	■	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only
Diode sensors compen- sated for extended range: E4412A/3A	■		FM only						
Two-path diode-stack sensors: E9300 Series	■	■	■	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only
USB sensors: U2000 Series	■	■	■	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only	■ Average only

1. The N1913A/4A power meters are compatible with all 8480 Series power sensors, including discontinued models.

N1913A/14A EPM Series Power Meters Performance Characteristics

Specifications describe the instrument's warranted performance and apply after a 30 minute warm-up. These specifications are valid over its operating/environmental range unless otherwise stated and after performing a zero and calibration procedure.

Supplemental characteristics (shown in *italics*) are intended to provide additional information, useful in applying the instrument by giving typical (expected), but not warranted performance parameters. These characteristics are shown in *italics* or labeled as “typical,” “nominal” or “approximate.”

Compatible power sensors	Keysight 8480 Series
	Keysight E9300 E-Series
	Keysight E4410 E-Series
	Keysight N8480 Series
	Keysight U2000 Series
	Keysight U8480 Series
	Keysight U2040x Series (except U2049X Series & in Average Mode only)
Frequency range	9 kHz to 110 GHz, sensor dependent
Power range	–70 to +44 dBm (100 pW to 25 W), sensor dependent
Single sensor dynamic range	90 dB maximum (Keysight E-Series power sensors)
	50 dB maximum (Keysight 8480 Series power sensors)
	55 dB maximum (Keysight N8480 Series power sensors)
	80 dB maximum (Keysight U2000 Series USB power sensors)
Display units	Absolute: Watts or dBm
	Relative: Percent or dB
Display resolution	Selectable resolution of: 1.0, 0.1, 0.01 and 0.001 dB in logarithmic mode, or 1, 2, 3 and 4 significant digits in linear mode
Default resolution	0.01 dB in logarithmic mode or three digits in linear mode
Accuracy	
Absolute accuracy	± 0.02 dB (Logarithmic) or ± 0.5% (Linear). Please add the corresponding power sensor linearity percentage from Tables 6, 9 and 10 (for the E-Series sensors), Table 14 (for the 8480 series sensors) and Table 16 (for N8480 sensors) to assess the overall system accuracy.
Relative accuracy	± 0.04 dB (Logarithmic) or ± 1.0% (Linear). Please add the corresponding power sensor linearity percentage from the mentioned tables above to assess the overall system accuracy.
Zero set (digital settability of zero)	0.0000175% (meter only)
	Power sensor dependent (refer Table 1), this specification applies when zeroing is performed with sensor input disconnected from the POWER REF.
Zero drift of sensors	This parameter is also called long term stability and is the change in the power meter indication over a long time (within one hour) at a constant temperature after a 24-hour warm-up of the power meter. Sensor dependent, refer to Table 1. For E9300 sensors, refer to Table 11 for complete data.
Measurement noise	
Sensor dependent, refer to Tables 1 and 2. For E9300 sensors, refer to Table 11 for complete data	
Effects of averaging on noise	Averaging over 1 to 1024 readings is available for reducing noise. Table 1 provides the measurement noise for a particular power sensor with the number of averages set to 16 for normal mode and 32 for x2 mode. Use the “Noise Multiplier” for the appropriate mode (normal or x2) and number of averages to determine the total measurement noise value.
	For example: For a Keysight 8481D power sensor in normal mode with the number of averages set to 4, the measurement noise is equal to: ($< 45 \text{ pW} \times 2.75$) = $< 124 \text{ pW}$

N1913A/14A EPM Series Power Meters Performance Characteristics (Continued)

1 mW power reference	
Power output	1.00 mW (0.0 dBm). Factory set to $\pm 0.4\%$ traceable to the National Physical Laboratories (NPL), UK
Accuracy (for two years)	$\pm 0.4\%$ ($25 \pm 10^\circ\text{C}$)
	$\pm 1.2\%$ (0 to 55°C)
Frequency	50 MHz nominal
SWR	1.05 (typical), 1.08 (0 to 55°C)
Connector type	Type-N (f), 50 Ω
Measurement speed	
Using remote interface (over the GPIB, USB or LAN), three measurement speed modes are available as shown, along with the typical maximum measurement speed for each mode.	
With N1913A power meter	Normal: 20 readings/second
	x2: 40 readings/second
	Fast: 400 readings/second, for Keysight E- Series power sensors only
With N1914A power meter	The measurement speed is reduced, for example, with both channels in FAST mode, the typical maximum measurement speed is 200 readings/second.
Fast mode is for Keysight E-Series power sensors only.	
Maximum measurement speed is obtained using binary output in free run trigger mode.	

Table 1. Power sensors zero set, zero drift and measurement noise.

Model	Zero set	Zero drift ¹	Measurement noise ²
E9300A, E9301A, E9304A ³	± 500 pW	$< \pm 150$ pW	< 700 pW
E9300B, E9301B ³	± 500 nW	$< \pm 150$ nW	< 700 nW
E9300H, E9301H ³	± 5 nW	$< \pm 1.5$ nW	< 7 nW
E4412A, E4413A	± 50 pW	$< \pm 15$ pW	< 70 pW
N8481A, N8482A, N8485A, N8487A, N8486AR, N8486AQ	± 25 nW	$< \pm 3$ nW	< 80 nW
8483A	± 50 nW	$< \pm 10$ nW	< 110 nW
N8481B, N8482B	± 50 μW	$< \pm 10$ μW	< 110 μW
8481D, 8485D, 8487D	± 20 pW	$< \pm 4$ pW	< 45 pW
N8481H, N8482H	± 5 μW	$< \pm 1$ μW	< 10 μW
R8486D, Q8486D	± 30 pW	$< \pm 6$ pW	< 65 pW
V8486A, W8486A	± 200 nW	$< \pm 40$ nW	< 450 nW

1. Within 1 hour after zero set, at a constant temperature, after a 24-hour warm-up of the power meter.

2. The number of averages at 16 for normal mode and 32 for x2 mode, at a constant temperature, measured over a one minute interval and two standard deviations. For E-Series sensors, the measurement noise is measured within the low range. Refer to the relevant sensor manual for further information.

3. Specification applies to the low power path, 15 to 75% relative humidity.

The 8480 Series sensors in the table do not include discontinued models.

Table 2. Noise multiplier.

Number of averages	1	2	4	8	16	32	64	128	256	512	1024
Noise multiplier											
– Normal mode	5.5	3.89	2.75	1.94	1	0.85	0.61	0.49	0.34	0.24	0.17
– x2 mode	6.5	4.6	3.25	2.3	1.63	1	0.72	0.57	0.41	0.29	0.2

N1913A/14A EPM Series Power Meters Performance Characteristics (Continued)

Settling time ¹

Manual filter, 10-dB decreasing power step for normal and x2 modes (not across range switch points for E-Series and N8480 Series sensors).

Table 3. Settling time

Number of averages	1	2	4	8	16	32	64	128	256	512	1024
Settling time with E-Series sensors (s)											
Normal mode	0.08	0.13	0.24	0.45	1.1	1.9	3.5	6.7	14	27	57
x2 mode	0.07	0.09	0.15	0.24	0.45	1.1	1.9	3.6	6.7	14	27
Settling time with N8480 Series sensors (s)											
Normal mode	0.15	0.2	0.3	0.5	1.1	1.9	3.4	6.6	13	27	57
x2 mode	0.15	0.18	0.22	0.35	0.55	1.1	1.9	3.5	6.9	14.5	33
Settling time with 8480 Series sensors (s)											
Normal mode	0.15	0.2	0.3	0.5	1.1	1.9	3.4	6.6	13	27	57
x2 mode	0.15	0.18	0.22	0.35	0.55	1.1	1.9	3.5	6.9	14.5	33

E-Series sensors In FAST mode (using free run trigger), within the range –50 dBm to +17 dBm, for a 10 dB decreasing power step, the settling time is:

- N1913A: 10 ms ²
- N1914A: 20 ms ²

1. Settling time: 0 to 99% settled readings over the GPIB.

2. When a power step crosses through the sensor's auto-range switch point, add 25 ms. Refer to the relevant sensor manual for switch point information.

N1913A/14A EPM Series Power Meters Performance Characteristics (Continued)

Settling time (Continued)

Auto filter, 10 dB decreasing power step for normal and X2 modes (not across the range switch points for E-Series and N8480 Series sensors).

x2 speed	Normal speed	Maximum dBm	Sensor dynamic range
40 ms	70 ms		
70 ms	120 ms	-40 dBm	
210 ms	400 s	-50 dBm	
3.4 s	6.5 s	-60 dBm	
		Minimum dBm	

With E-Series E4412/13A sensors

x2 speed	Normal speed	Maximum dBm	Sensor dynamic range
150 ms	150 ms	20 dBm	
180 ms	200 ms	10 dBm	
400 ms	1 s	10 dBm	
3.6 s	6.6 s	10 dBm	
6.6 s	13.5 s	5 dB	
		Minimum dBm	

With N8480 Series sensors

x2 speed	Normal speed	Maximum dBm	Sensor dynamic range
40 ms	70 ms		
120 ms	210 ms	+10 dBm	High power path
210 ms	400 ms	+2 dBm	
400 ms	1 s	-4 dBm	
40 ms	70 ms	-10 dBm	Sensor dynamic range
70 ms	120 ms	-20 dBm	
400 ms	1 s	-30 dBm	
3.4 s	6.5 s	-40 dBm	
6.8 s	13 s	-50 dBm	
		Minimum dBm	

With E-Series E9300A/01A/04A sensors

x2 speed	Normal speed	Maximum dBm	Sensor dynamic range
150 ms	150 ms	20 dBm	
180 ms	200 ms	10 dBm	
350 ms	500 ms	10 dBm	
3.5 s	6.6 s	10 dBm	
		Minimum dBm	

With 8480 Series sensors

x2 speed	Normal speed	Maximum dBm	Sensor dynamic range
40 ms	70 ms		
120 ms	210 ms	+40 dBm	High power path
210 ms	400 ms	+32 dBm	
400 ms	1 s	-26 dBm	
40 ms	70 ms	-20 dBm	Sensor dynamic range
70 ms	120 ms	-10 dBm	
400 ms	1 s	0 dBm	
3.4 s	6.5 s	-10 dBm	
6.8 s	13 s	-20 dBm	
		Minimum dBm	

With E-Series E9300B/01B/00H/01H sensor

N1913A/14A EPM Series Power Meters Performance Characteristics (Continued)

Power meter functions			
Accessed by key entry	Either hard keys, or soft key menu, and programmable		
Zero	Zeros the meter. (Power reference calibrator is switched off during zeroing.)		
Cal	Calibrates the meter using internal (power reference calibrator) or external source. Reference cal factor settable from 1% to 150%, in 0.1% increments.		
Frequency	Entered frequency range is used to interpolate the calibration factors table. Frequency range from 1 kHz to 999.9 GHz. Also settable in 1 kHz steps.		
Cal factor	Sets the calibration factor for the meter. Range: 1% to 150%, in 0.1% increments.		
Relative	Displays all successive measurements relative to the last displayed value		
Offset	Allows power measurements to be offset by -100 dB to +100 dB, settable in 0.001 dB increments, to compensate for external loss or gain		
Save/recall	Store up to 10 instrument states via the save/recall menu		
dBm/W	Selectable units of either Watts or dBm in absolute power; or percent or dB for relative measurements		
Filter (averaging)	Selectable from 1 to 1024. Auto-averaging provides automatic noise compensation.		
Duty cycle	Duty cycle values between 0.001% to 99.999%, in 0.001% increments, can be entered to display a peak power representation of measured power. The following equation is used to calculate the displayed peak power value: peak power = measured power/duty cycle.		
Sensor cal tables	Selects cal factor versus frequency tables corresponding to specified sensors		
Limits	High and low limits can be set in the range -150.000 to +230.000 dBm, in 0.001 dBm increments		
Preset default values	dBm mode, rel off, power reference off, duty cycle off, offset off, frequency 50 MHz, AUTO average, free run, AUTO range (for E-Series sensors and N8480 Series)		
Display	Color display with selectable single and split screen formats are available. A quasi-analog display is available for peaking measurements. The dual channel power meter can simultaneously display any two configurations of A, B, A/B, B/A, A-B, B-A and relative. With the optional USB ports, additional dual channel (C & D), adds up to total 4-channels measurement display.		
Power meter general specifications			
Dimensions	The following dimensions exclude front and rear protrusions: 212.6 mm W x 88.5 mm H x 348.3 mm D (8.5 in x 3.5 in x 13.7 in)		
Weight	Model	Net	Shipping
	N1913A	3.6 kg (8.0 lb)	8.2 kg (18.1 lb)
	N1914A	3.7 kg (8.2 lb)	8.2 kg (18.3 lb)
Rear panel connectors			
Recorder outputs	Analog 0 to 1 volt, 1 kΩ output impedance, BNC connector. N1914A recorder outputs are dedicated to channel A and channel B.		
GPIO, USB 2.0 and 10/100BaseT LAN	Interfaces to allow communication with an external controller		
Trigger Input (optional) ¹	Input has TTL compatible logic levels and uses a BNC connector High: > 2.4 V Low: < 0.7 V		
Trigger Output (optional) ¹	Output provides TTL compatible logic levels and uses a BNC connector High: > 2.4 V Low: < 0.7 V		
Ground	Binding post, accepts 4 mm plug or bare wire connection		
USB Host (options)	USB ports which connects to U2000 series USB power sensors		
VGA Out (options)	Standard 15-pin VGA connector, allows connection of external VGA monitor		

1. For automated power or frequency sweep function.

N1913A/14A EPM Series Power Meters Performance Characteristics (Continued)

Line power	
Input voltage range	90 to 264 VAC, automatic selection
Input frequency range	47 to 63 Hz and 400 Hz at 110 Vac
Power requirement	75 VA (50 Watts)
Battery option operational characteristics ¹	
The following information describes characteristic performance based at a temperature of 25 °C unless otherwise noted.	
Typical operating time	Up to 6 hours with LCD backlight on; up to 7.5 hours with LCD backlight off (N1913A power meter)
Charge time	Approximately, 2.5 hours to charge fully from an empty state. Power meter is operational whilst charging.
Battery type	Lithium-ion (Li-ion)
Battery storage temperature	-20 to 60 °C, ≤ 80 % RH
Environmental characteristics	
Electromagnetic compatibility	Complies with the essential requirements of EMC Directive (2004/108/EC) as follows: IEC61326- 1:2005 / EN61326- 1:2006 CISPR11:2003 / EN55011:2007 (Group 1, Class A) The product also meets the following EMC standards: Canada: ICES/NMB- 001:2004 Australia/New Zealand: AS/NZS CISPR 11:2004
Product safety	This product conforms to the requirements of the following safety standards: IEC 61010- 1:2001 / EN 61010- 1:2001 CAN/CSA- C22.2 No.61010- 1- 04 ANSI/UL61010- 1:2004
Low Voltage Directive	This product conforms to the requirements of European Council Directive “2006/95/EC”
Operating environment	
Temperature	0 to 55 °C
Maximum humidity	95% at 40 °C (non-condensing)
Maximum altitude	4,600 meters (15,000 feet)
Storage conditions	
Non-operating storage temperature	-40 to +70 °C
Non-operating maximum humidity	90% at 65 °C (non-condensing)
Non-operating maximum altitude	4,600 meters (15,000 feet)
Remote programming	
Interface	GPIO, USB and LAN interfaces operates to IEEE 488.2 standard
Command language	SCPI standard interface commands. Code-compatible with legacy E4418B/9B EPM Series, 436A, 437B and 438A power meters (43X compatibility only with option N191xA-200).
GPIO compatibility	SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP1, DC1, DT1, C0

1. Characteristics describe product performance that is useful in the application of the product, but is not covered by the product warranty.

N1913A/14A EPM Series Power Meters Ordering Information

Power meters

Model	Description
N1913A	Single-channel average power meter
N1914A	Dual-channel average power meter

Standard-shipped accessories

- Power cord
- Power sensor cable, 1.5 m (5 ft) (One per N1913A, two per N1914A)
- USB cable Type A to Mini-B, 6 ft
- Documentation CD-ROM
- Keysight Instrument Control DVD
 - IO Libraries Suite
 - Command Expert
 - BenchVue Software Platform
 - 30-day free trial of BenchVue Power Meter/Sensor Control and Analysis app

Options

Power meter configurations	
N1913/4A-004	Delete power sensor cable(s)
N1913/4A-101 ¹	Single/dual-channel average power meter
N1913/4A-201	Single/dual-channel average power meter with VGA, trigger in/out, 1 front and 1 rear USB port
N1913/4A-B01	Without battery (mandatory for Option 201)
N1913/4A-C01	Front calibrator, front sensor
N1913/4A-C02	Front calibrator, parallel front and rear sensor
N1913/4A-C03	Rear calibrator, parallel front and rear sensor
N1913A-200	436A and 437B code compatibility for new N1913A purchase
N1914A-200	438A code compatibility for new N1914A purchase
N6901A-1FP	436A and 437B code compatibility for N1913A. Post purchase upgrade only.
N6902A-1FP	438A code compatibility for N1914A. Post purchase upgrade only.
Power sensor cables	
11730A	Power sensor cable: 1.5 m/5 ft
11730B	Power sensor cable: 3.0 m/10 ft
11730C	Power sensor cable: 6.1 m/20 ft
11730D	Power sensor cable: 15.2 m/50 ft
11730E	Power sensor cable: 30.5 m/100 ft
11730F	Power sensor cable: 61 m/200 ft
Other accessories	
34131A	Transit case
34141A	Soft carrying case
34161A	Accessory pouch
N191xA-908	Rackmount kit for one instrument
N191xA-909	Rackmount kit for two instruments
Software	Description
BV0007B	BenchVue Power Meter/Sensor Control and Analysis app license
Calibration	
N191xA-1A7	Calibration + Uncertainties + Guardbanding
N191xA-A6J	ANSI Z540-1-1994 Calibration
R-50C-011-3	Calibration Assurance Plan - Return to Keysight - 3 years
R-50C-011-5	Calibration Assurance Plan - Return to Keysight - 3 years
R-50C-021-3	ANSI Z540-1-1994 Calibration - 3 years
R-50C-021-5	ANSI Z540-1-1994 Calibration - 5 years
GPIO connectivity products	
82357B	USB/GPIB converter
10833x	GPIB cables: 10833D (0.5 m), 10833A (1 m), 10833B (2 m), 10833C (4 m), 10833F (6 m), 10833G (8 m)

1. Option 101 provides the calibrator and the sensor(s) on the front panel. It can't be ordered with any of the B0x/C0x options.

N1913A/14A EPM Series Power Meters Ordering Information (Continued)

Options (Continued)

Documentation	
N191xA-OB1	Hard copy English language User's Guide and Installation Guide
N191xA-OBF	Hard copy English language Programming Guide
N191xA-OBW	Hard copy English language Service Guide
N191xA-ABA	Hard copy English language User's Guide and Programming Guide
N191xA-ABJ	Hard copy Japanese localization User's Guide and Programming Guide

E-Series Power Sensor Specifications

The E-Series of power sensors have their calibration factors stored in EEPROM and operate over a wide dynamic range. They are designed for use with the EPM Series of power meters and two classes of sensors are available:

- CW power sensors (E4412A and E4413A)
- Average power sensors (E9300 sensors)

E-Series CW Power Sensor Specifications

Widest dynamic range: 100 pW to 100 mW (–70 to +20 dBm)

Table 4. E4410 Series max SWR specification.

Model	Maximum SWR	Maximum SWR	Maximum power	Connector type
E4412A	10 MHz to 18 GHz	10 to < 30 MHz: 1.22 ¹	200 mW (+23 dBm)	Type-N (m)
		30 MHz to < 2 GHz: 1.15		
		2 to < 6 GHz: 1.17		
		6 to < 11 GHz: 1.2		
		11 to < 18 GHz: 1.27		
E4413A	50 MHz to 26.5 GHz	50 to < 100 MHz: 1.21	200 mW (+23 dBm)	APC-3.5 mm (m)
		100 MHz to < 8 GHz: 1.19		
		8 to < 18 GHz: 1.21		
		18 to 26.5 GHz: 1.26		

1. Applies to sensors with serial prefix US 3848 or greater.

For power levels greater than 0 dBm, add 0.5%/dB to the calibration factor uncertainty specification

E-Series CW Power Sensor Specifications (Continued)

Calibration factor (CF) and reflection coefficient (Rho)

Calibration factor and reflection coefficient data are provided at 1 GHz increments on a data sheet included with the power sensor. This data is unique to each sensor. If you have more than one sensor, match the serial number on the data sheet with the serial number on the power sensor you are using. The CF corrects for the frequency response of the sensor. The EPM power meter automatically reads the CF data stored in the sensor and uses it to make the corrections.

Reflection coefficient (Rho) relates to the SWR according to the following formula:

$$SWR = 1 + Rho / 1 - Rho.$$

Maximum uncertainties of the CF data are listed in Table 5a, for the E4412A power sensor, and Table 5b for the E4413A power sensor. The uncertainty analysis for the calibration of the sensors was done in accordance with the ISO/TAG4 Guide. The uncertainty data reported on the calibration certificate is the expanded uncertainty with a 95% confidence level and a coverage factor of 2.

Table 5a. E4412A calibration factor uncertainty at 1 mW (0 dBm).

Frequency	Uncertainty ¹ (%)
10 MHz	1.8
30 MHz	1.8
50 MHz	Reference
100 MHz	1.8
1.0 GHz	1.8
2.0 GHz	2.4
4.0 GHz	2.4
6.0 GHz	2.4
8.0 GHz	2.4
10.0 GHz	2.4
11.0 GHz	2.4
12.0 GHz	2.4
14.0 GHz	2.4
16.0 GHz	2.6
18.0 GHz	2.6

Table 5b. E4413A calibration factor uncertainty at 1 mW (0 dBm).

Frequency	Uncertainty ¹ (%)
50 MHz	Reference
100 MHz	1.8
1.0 GHz	1.8
2.0 GHz	2.4
4.0 GHz	2.4
6.0 GHz	2.4
8.0 GHz	2.4
10.0 GHz	2.6
11.0 GHz	2.6
12.0 GHz	2.8
14.0 GHz	2.8
16.0 GHz	2.8
17.0 GHz	2.8
18.0 GHz	2.8
20.0 GHz	3.0
24.0 GHz	3.0
26.0 GHz	3.0
28.0 GHz	3.0

1. For power levels greater than 0 dBm, add 0.5%/dB to the calibration factor uncertainty specification.

E-Series CW Power Sensor Specifications (Continued)

Power linearity

Table 6. E4410 Series power linearity specification.

Power	Temperature (25 ± 5 °C)	Temperature (0 to 55 °C)
100 pW to 10 mW (–70 to +10 dBm)	± 3%	± 7%
10 mW to 100 mW (+10 to +20 dBm)	± 4.5%	± 10%

The chart in Figure 1 shows the typical uncertainty in making a relative power measurement, using the same power meter channel and the same power sensor to obtain the reference and the measured values. Example A illustrates a relative gain (amplifier measurement). Example B illustrates a relative loss (insertion loss measurement). This chart assumes negligible change in frequency and mismatch occur when transitioning from the power level used as the reference to the power level being measured.

- Example A
- $P = 10(P)/10 \times 1 \text{ mW}$
 - $P = 10 \text{ 6}/10 \times 1 \text{ mW}$
 - $P = 3.98 \text{ mW}$
 - $3\% \times 3.98 \text{ mW} = 119.4 \text{ }\mu\text{W}$

- Example B
- $P = 10 (P)/10 \times 1 \text{ mW}$
 - $P = 10 -35/10 \times 1 \text{ mW}$
 - $P = 316 \text{ nW}$
 - $3\% \times 316 \text{ nW} = 9.48 \text{ nW}$

where

- P = power in Watts

and

- (P) = power in dBm

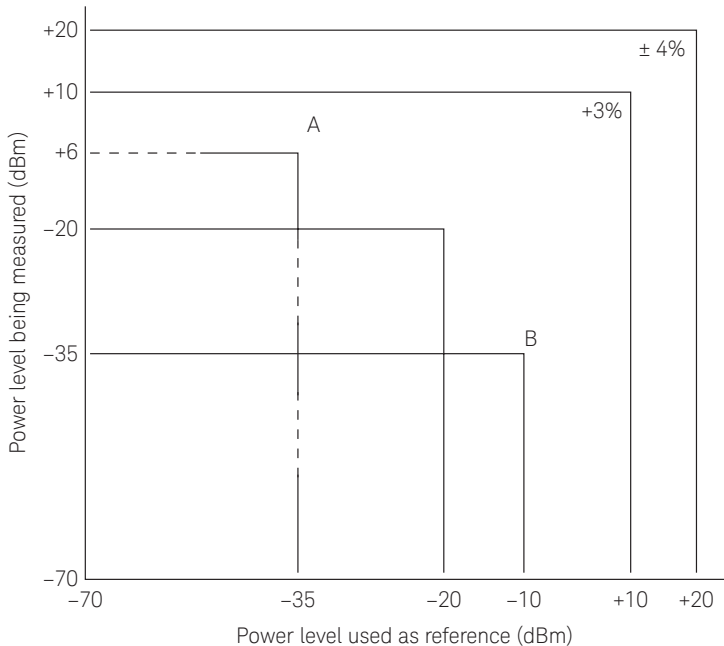


Figure 1. Relative mode power measurement linearity with EPM Series power meter/E-Series CW power sensor at 25 °C ± 5 °C (typical).



E-Series E9300 Average Power Sensor Specifications

The E-Series E9300 wide dynamic range, average power sensors are designed for use with the EPM family of power meters. These specifications are valid ONLY after proper calibration of the power meter and apply for CW signals unless otherwise stated.

Specifications apply over the temperature range 0 to 55 °C unless otherwise stated, and specifications quoted over the temperature range 25 °C $\pm$ 10 °C, conform to the standard environmental test conditions as defined in TIA/EIA/IS-97-A and TIA/EIA/IS-98-A.

The E-Series E9300 power sensors have two independent measurement paths (high and low power paths) as shown in Table 7.


Table 7. E9300 Series two-path specification.

	“A” suffix sensors	“B” suffix sensors	“H” suffix sensors
High power path	–10 to +20 dBm	+20 to +44 dBm	0 to +30 dBm
Low power path	–60 to –10 dBm	–30 to +20 dBm	–50 to 0 dBm


Table 8. E9300 Series sensors specification.

Model	Frequency range	Maximum SWR (25 °C ± 10 °C)	Maximum SWR (0 to 55 °C)	Maximum power	Connector type
-60 to +20 dBm wide dynamic range sensors					
E9300A	10 MHz to 18 GHz	10 to 30 MHz: 1.15	10 to 30 MHz: 1.21	+25 dBm (320 mW) average	Type-N (m)
		30 MHz to 2 GHz: 1.13	30 MHz to 2 GHz: 1.15	+33 dBm peak (2 W)	
		2 to 14 GHz: 1.19	2 to 14 GHz: 1.20	(< 10 μsec)	
		14 to 16 GHz: 1.22	14 to 16 GHz: 1.23		
		16 to 18 GHz: 1.26	16 to 18 GHz: 1.27		
E9301A	10 MHz to 6 GHz	10 MHz to 30 GHz: 1.15	10 to 30 MHz: 1.21	+25 dBm (320 mW) average	Type-N (m)
		30 MHz to 2 GHz: 1.13	30 MHz to 2 GHz: 1.15	+33 dBm peak (2 W)	
		2 to 6 GHz: 1.19	2 to 6 GHz: 1.20	(< 10 μsec)	
E9304A	9 kHz to 6 GHz	9 kHz to 2 GHz: 1.13	9 kHz to 2 GHz: 1.15	+25 dBm (320 mW) average	Type-N (m)
		2 to 6 GHz: 1.19	2 to 6 GHz: 1.20	+33 dBm peak (2 W) (< 10 μsec)	
-30 to +44 dBm wide dynamic range sensors					
E9300B	10 MHz to 18 GHz	10 MHz to 8 GHz: 1.12	10 MHz to 8 GHz: 1.14	0 to 35 °C: 30 W avg	Type-N (m)
		8 to 12.4 GHz: 1.17	8 to 12.4 GHz: 1.18	35 to 55 °C: 25 W avg	
		12.4 to 18 GHz: 1.24	12.4 to 18 GHz: 1.25	< 6 GHz: 500 W pk	
				> 6 GHz: 125 W pk 500 W.μS per pulse	
E9301B	10 MHz to 6 GHz	10 MHz to 6 GHz: 1.12	10 MHz to 6 GHz: 1.14	0 to 35 °C: 30 W avg	Type-N (m)
				35 to 55 °C: 25 W avg	
				< 6 GHz: 500 W pk	
				> 6 GHz: 125 W pk 500 W.μS per pulse	
-50 to +30 dBm wide dynamic range sensors					
E9300H	10 MHz to 18 GHz	10 MHz to 8 GHz: 1.15	10 MHz to 8 GHz: 1.17	3.16 W avg	Type-N (m)
		8 to 12.4 GHz: 1.25	8 to 12.4 GHz: 1.26	100 W pk	
E9301H	10 MHz to 6 GHz	10 MHz to 6 GHz: 1.15	10 MHz to 6 GHz: 1.17	3.16 W avg	Type-N (m)
				100 W pk	
				100 W.μS per pulse	


E-Series E9300 Average Power Sensor Specifications (Continued)

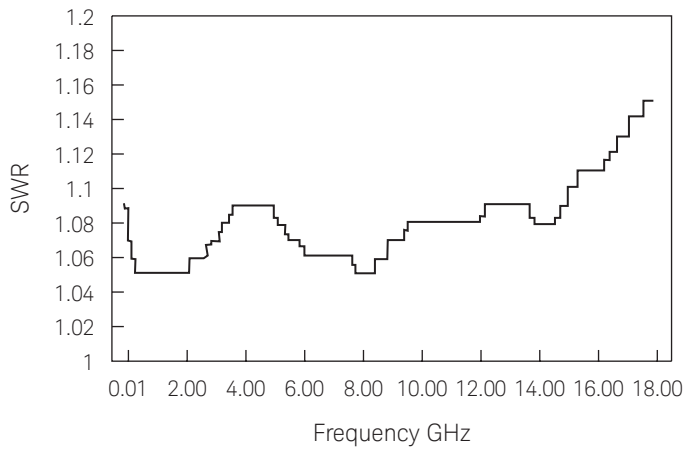


Typical SWR, 10 MHz to 18 GHz (25 °C ± 10 °C) for E9300A and E9301A sensor.

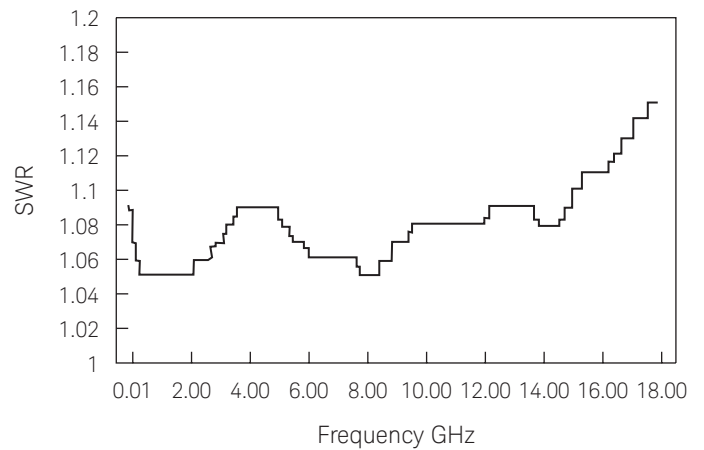

Typical SWR, 9 kHz to 6 GHz (25 °C ± 10 °C) for E9304A sensors.

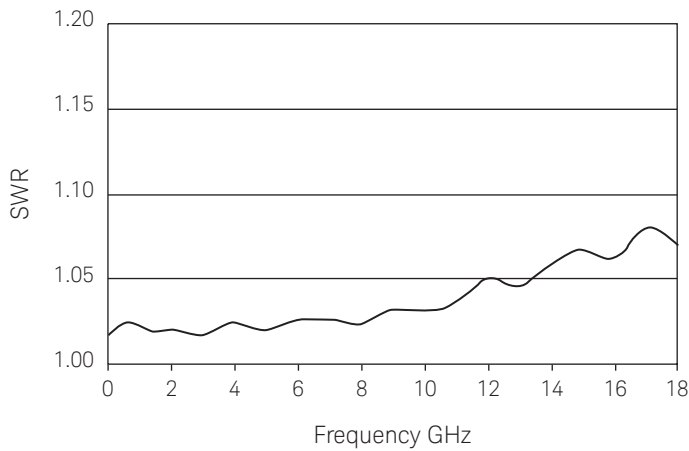

Typical SWR, 10 MHz to 18 GHz (25 °C ± 10 °C) for E9300B and E9301B sensors.

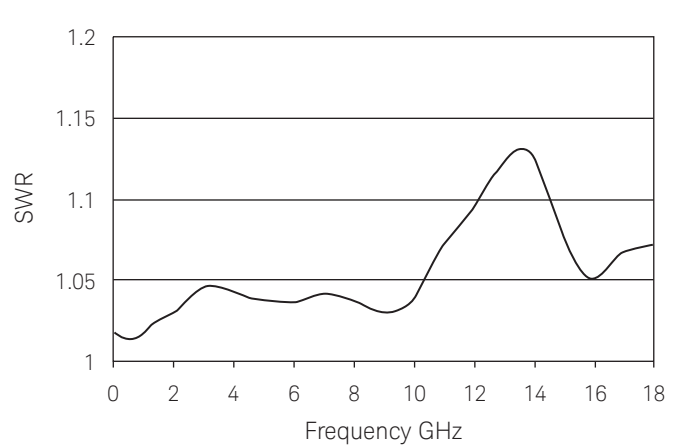

Typical SWR, 10 MHz to 18 GHz (25 °C ± 10 °C) for E9300H and E9301H sensors.


E-Series E9300 Average Power Sensor Specifications (Continued)

Power linearity ¹

Table 9. E9300 Series power linearity (after zero and cal at ambient environmental conditions) sensor.


Sensor	Power	Linearity (25 ± 10 °C)	Linearity (0 to 55 °C)
E9300A, E9301A, E9304A	-60 to -10 dBm	± 3.0%	± 3.5%
	-10 to 0 dBm	± 2.5%	± 3.0%
	0 to +20 dBm	± 2.0%	± 2.5%
E9300B, E9301B	-30 to +20 dBm	± 3.5%	± 4.0%
	+20 to +30 dBm	± 3.0%	± 3.5%
	+30 to +44 dBm	± 2.5%	± 3.0%
E9300H, E9301H	-50 to 0 dBm	± 4.0%	± 5.0%
	0 to +10 dBm	± 3.5%	± 4.0%
	+10 to +30 dBm	± 3.0%	± 3.5%

1. After zero and calibration at ambient environmental conditions.

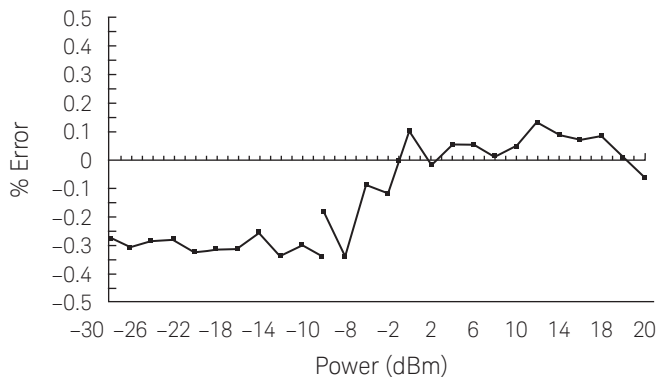


Typical E9300A/01A/04A power linearity at 25 °C, after zero and calibration, with associated measurement uncertainty.

Power range	Measurement uncertainty
-30 to -20 dBm	± 0.9%
-20 to -10 dBm	± 0.8%
-10 to 0 dBm	± 0.65%
0 to +10 dBm	± 0.55%
+10 to +20 dBm	± 0.45%

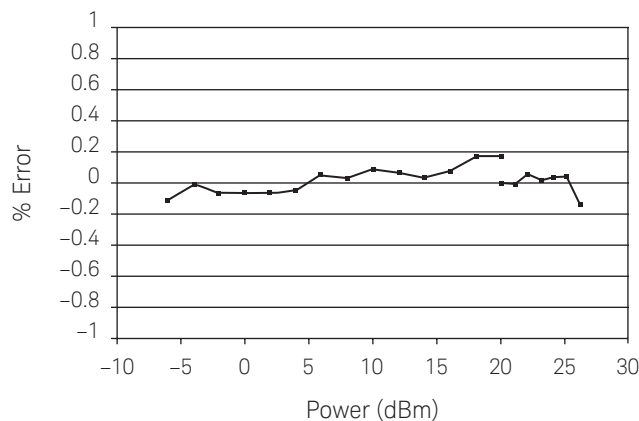

Typical E9300B/01B power linearity at 25 °C, after zero and calibration, with associated measurement uncertainty.

Power range	Measurement uncertainty
-6 to 0 dBm	± 0.65%
0 to +10 dBm	± 0.55%
+10 to +20 dBm	± 0.45%
+20 to +26 dBm	± 0.31%

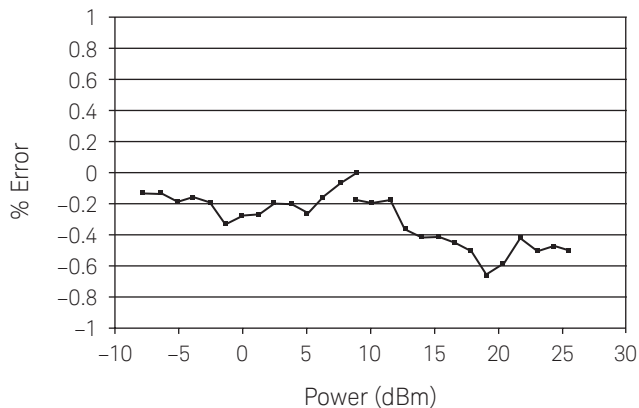

Typical E9300H/01H power linearity at 25 °C, after zero and calibration, with associated measurement uncertainty.

Power range	Measurement uncertainty
-26 to -20 dBm	± 0.9%
-20 to -10 dBm	± 0.8%
-10 to 0 dBm	± 0.65%
0 to +10 dBm	± 0.55%
+10 to +20 dBm	± 0.45%
+20 to +26 dBm	± 0.31%

E-Series E9300 Average Power Sensor Specifications (Continued)

Effects of change in temperature on linearity

Note: If the temperature changes after calibration and you choose not to re-calibrate the sensor, the following additional power linearity error should be added to the linearity specs in Table 9.

For small changes in temperature: The typical maximum additional power linearity error due to small temperature change after calibration is $\pm 0.15\%/^{\circ}\text{C}$ (valid after zeroing the sensor).

For large changes in temperature: refer to Table 10.

Table 10. Typical maximum additional power linearity error due to temperature change (valid after zeroing the sensor).

Sensor	Power	Additional power linearity error (25 °C $\pm$ 10 °C)	Additional power linearity error (0 to 55 °C)
E9300A, E9301A, E9304A	–60 to –10 dBm	$\pm 1.5\%$	$\pm 2.0\%$
	–10 to 0 dBm	$\pm 1.5\%$	$\pm 2.5\%$
	0 to +20 dBm	$\pm 1.5\%$	$\pm 2.0\%$
E9300B, E9301B	–30 to +20 dBm	$\pm 1.5\%$	$\pm 2.0\%$
	+20 to +30 dBm	$\pm 1.5\%$	$\pm 2.5\%$
	+30 to +44 dBm	$\pm 1.5\%$	$\pm 2.0\%$
E9300H, E9301H	–50 to 0 dBm	$\pm 1.5\%$	$\pm 2.0\%$
	0 to +10 dBm	$\pm 1.5\%$	$\pm 2.5\%$
	+10 to +30 dBm	$\pm 1.5\%$	$\pm 2.0\%$

Figure 2 shows the typical uncertainty in making a relative power measurement, using the same power meter channel and same power sensor to obtain the reference and the measured values, and assumes that negligible change in frequency and mismatch error occur when transitioning from the power level used as the reference to the power level being measured.

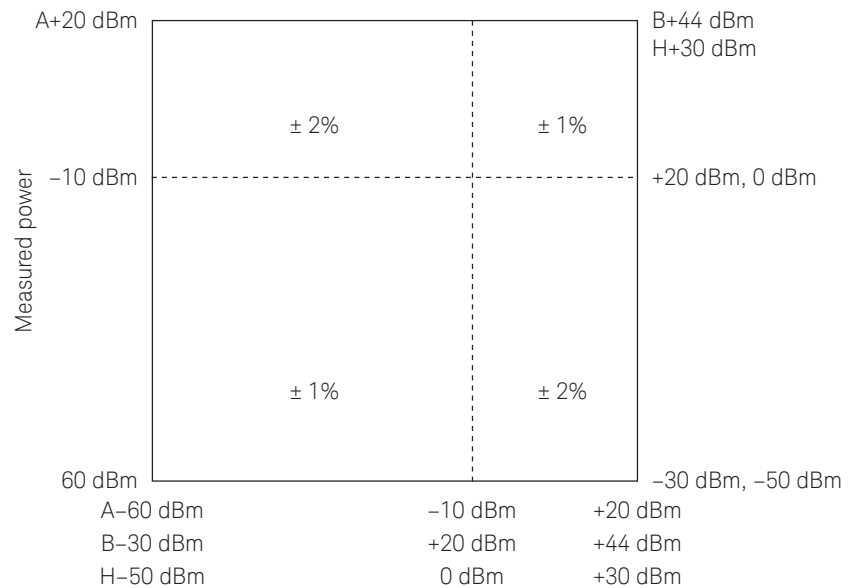


Figure 2. Relative mode power measurement linearity with an EPM Series power meter, at 25 °C $\pm$ 10 °C (typical).

E-Series E9300 Average Power Sensor Specifications (Continued)

Switch point data

The E9300 power sensors have two paths as shown in Table 7. The power meter automatically selects the proper power level path. To avoid unnecessary switching when the power level is near the switch point, switching point hysteresis has been added.

E9300 “A” suffix sensors example:

- Hysteresis causes the low power path to remain selected until approximately –9.5 dBm as the power level is increased, above this power the high power path will be selected. The high power path will remain selected until approximately –10.5 dBm is reached as the signal level decreases, below this power the low power path will be selected.

Switching point linearity:

- Typically = $\pm 0.5\%$ (= ± 0.02 dB)

Switching point hysteresis:

- 0.5 dB typical

Table 11. E9300 Series sensor switch point specification.

E9300 sensor suffix	Conditions ¹	Zero set	Zero drift ²	Measurement noise ³
A	Lower power path (15 to 75% RH)	500 pW	150 pW	700 pW
	Lower power path (75 to 95% RH)	500 pW	4,000 pW	700 pW
	High power path (15 to 75% RH)	500 nW	150 nW	500 nW
	High power path (75 to 95% RH)	500 nW	3000 nW	500 nW
B	Lower power path (15 to 75% RH)	500 nW	150 nW	700 nW
	Lower power path (75 to 95% RH)	500 nW	4 μ W	700 nW
	High power path (15 to 75% RH)	500 μ W	150 μ W	500 μ W
	High power path (75 to 95% RH)	500 μ W	3000 mW	500 μ W
H	Lower power path (15 to 75% RH)	5 nW	1.5 nW	7 nW
	Lower power path (75 to 95% RH)	5 nW	40 μ W	7 nW
	High power path (15 to 75% RH)	5 μ W	1.5 μ W	5 μ W
	High power path (75 to 95% RH)	5 μ W	30 mW	5 μ W

1. RH is the abbreviation for relative humidity.

2. Within 1 hour after zero set, at a constant temperature, after a 24-hour warm-up of the power meter with power sensor connected.

3. The number of averages at 16 for normal mode and 32 for x2 mode, at a constant temperature, measured over a one minute interval and two standard deviations.

E-Series E9300 Average Power Sensor Specifications (Continued)

Calibration factor (CF) and reflection coefficient (Rho)

Calibration factor and reflection coefficient data are provided at frequency intervals on a data sheet included with the power sensor. This data is unique to each sensor. If you have more than one sensor, match the serial number on the certificate of calibration (CoC) with the serial number on the power sensor you are using. The CF corrects for the frequency response of the sensor. The EPM Series power meter automatically reads the CF data stored in the sensor and uses it to make the corrections.

Reflection coefficient (Rho) relates to the SWR according to the following formula:

$$SWR = (1 + \text{Rho}) / (1 - \text{Rho})$$

Maximum uncertainties of the CF data are listed in Tables 12a and 12b. As the E-Series E9300 power sensors have two independent measurement paths (high and low power paths), there are two calibration factor uncertainty tables. The uncertainty analysis for the calibration of the sensors was done in accordance with the ISO Guide. The uncertainty data reported on the calibration certificate is the expanded uncertainty with a 95% confidence level and a coverage factor of 2.

Table 12a. Calibration factor uncertainties (low power path).

Frequency	Uncertainty (%) (25 °C ± 10 °C)	Uncertainty (%) (0 to 55 °C)
10 to 30 MHz	± 1.8%	± 2.2%
30 to 500 MHz (E9304A: 9 kHz to 500 MHz)	± 1.6%	± 2.0%
500 MHz to 1.2 GHz	± 1.8%	± 2.5%
1.2 to 6 GHz	± 1.7%	± 2.0%
6 to 14 GHz	± 1.8%	± 2.0%
14 to 18 GHz	± 2.0 %	± 2.2%

Table 12b. Calibration factor uncertainties (high power path).

Frequency	Uncertainty (%) (25 °C ± 10 °C)	Uncertainty (%) (0 to 55 °C)
10 to 30 MHz	± 2.1%	± 4.0%
30 to 500 MHz (E9304A: 9 kHz to 500 MHz)	± 1.8%	± 3.0%
500 MHz to 1.2 GHz	± 2.3%	± 4.0%
1.2 to 6 GHz	± 1.8%	± 2.1%
6 to 14 GHz	± 1.9%	± 2.3%
14 to 18 GHz	± 2.2 %	± 3.3%



848xD Series Diode and 8483A Thermocouple Power Sensor Specifications

Calibration factor uncertainties

These thermocouple and diode power sensors provide extraordinary accuracy, stability, and SWR over a wide range of frequencies (100 kHz to 110 GHz) and power levels (–70 to +20 dBm).

The 8480 Series sensors in the table do not include discontinued models.

Table 13. Typical root sum of squares (rss) uncertainty on the calibration factor data printed on the power sensor.

Frequency (GHz)	8483A	8481D	8485D	8487D	R8486D	Q8486D
0.0001	1.3	–	–	–	–	–
0.0003	1.2	–	–	–	–	–
0.001	1.1	–	–	–	–	–
0.003	1.2	–	–	–	–	–
0.01	1.2	–	–	–	–	–
0.03	1.2	–	–	–	–	–
0.05	1.2	–	–	–	–	–
0.1	1.2	–	–	–	–	–
0.3	1.2	–	–	–	–	–
1	1.2	0.8	1.4	1.3	–	–
2	1.2	0.8	1.4	1.3	–	–
4	–	0.8	1.7	1.4	–	–
6	–	0.9	1.7	1.4	–	–
8	–	1.0	1.7	1.4	–	–
10	–	1.1	1.9	1.5	–	–
12	–	1.2	1.9	1.5	–	–
14	–	1.1	2.0	1.6	–	–
16	–	1.5	2.1	1.7	–	–
18	–	1.7	2.2	1.7	–	–
22	–	–	2.7	1.9	–	–
26.5	–	–	2.8	2.2	3.0	–
28	–	–	2.9 ¹	2.3	3.2	–
30	–	–	3.2 ¹	2.4	3.0	–
33	–	–	3.3 ¹	2.6	3.0	4.2
34.5	–	–	–	2.6	3.0	4.2
37	–	–	–	2.7	3.0	4.2
40	–	–	–	3.0	–	4.2
42	–	–	–	3.2	–	4.9
44	–	–	–	2.5	–	5.1
46	–	–	–	3.8	–	5.5
48	–	–	–	3.8	–	5.8
50	–	–	–	5.0	–	6.2

1. These uncertainties only apply to Option 033.

848xD Series Diode and 8483A Thermocouple Power Sensor Specifications (Continued)

Maximum SWR and power linearity

Table 14. 8480 Series maximum SWR and power linearity.

Model	Frequency range	Maximum SWR	Power linearity ¹	Maximum power	Connector type	Weight
100 mW sensors, 1 μW to 100 mW (–30 to +20 dBm)						
8483A (75-Ohm)	100 kHz to 2 GHz	100 kHz to 600 kHz: 1.80 600 kHz to 2 GHz: 1.18	+10 to +20 dBm: ($\pm 3\%$)	300 mW avg 10 W pk	Type-N (m) 75 ohm	Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb)
V8486A	50 to 75 GHz	50 to 75 GHz: 1.06	–30 to +10 dBm: ($\pm 1\%$) +10 to +20 dBm: ($\pm 2\%$)	200 mW avg 40 W pk (10 μ s per pulse, 0.5% duty cycle)	Waveguide flange UG-385/U	Net: 0.4 kg (0.9 lb) Shipping: 1 kg (2.1 lb)
W8486A	75 to 110 GHz	75 to 110 GHz: 1.08	($\pm 2\%$)	200 mW avg 40 W pk (10 μ s per pulse, 0.5% duty cycle)	Waveguide flange UG-387/U	Net: 0.4 kg (0.9 lb) Shipping: 1 kg (2.1 lb)
High sensitivity sensors, 100 pW to 10 μW (–70 to –20 dBm)						
8481D ²	10 MHz to 18 GHz	10 to 30 MHz: 1.40 30 MHz to 4 GHz: 1.15 4 to 10 GHz: 1.20 10 to 15 GHz: 1.30 15 to 18 GHz: 1.35	–30 to –20 dBm: ($\pm 1\%$)	100 mW avg 100 mW pk	Type-N (m)	Net: 0.16 kg (0.37 lb) Shipping: 0.9 kg (2.0 lb)
8485D ²	50 MHz to 26.5 GHz	0.05 to 0.1 GHz: 1.190.1 to 4 GHz: 1.15 4 to 12 GHz: 1.19 12 to 18 GHz: 1.25 18 to 26.5 GHz: 1.29	–30 to –20 dBm: ($\pm 2\%$)	100 mW avg 100 mW pk	APC-3.5 mm (m)	Net: 0.2 kg (.38 lb) Shipping: 0.5 kg (1.0 lb)
Option 8485D-033	50 MHz to 33 GHz	26.5 to 33 GHz: 1.35	–30 to –20 dBm: ($\pm 2\%$)	100 mW avg 100 mW pk	APC-3.5 mm (m)	Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb)
8487D ²	50 MHz to 50 GHz	0.05 to 0.1 GHz: 1.19 0.1 to 2 GHz: 1.15 2 to 12.4 GHz: 1.20 12.4 to 18 GHz: 1.29 18 to 34 GHz: 1.37 34 to 40 GHz: 1.61 40 to 50 GHz: 1.89	–30 to –20 dBm: ($\pm 2\%$)	100 mW avg 100 mW pk 10 W μ s per pulse	2.4 mm (m)	Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb)
R8486D ²	26.5 to 40 GHz	26.5 to 40 GHz: 1.40	–30 to –25 dBm: ($\pm 3\%$) –25 to –20 dBm: ($\pm 5\%$)	100 mW avg, or pk 40 V dc max	Waveguide flange UG-599/U	Net: 0.26 kg (0.53 lb) Shipping: 0.66 kg (1.3 lb)
Q8486D ²	33 to 50 GHz	33 to 50 GHz: 1.40	–30 to –25 dBm: ($\pm 3\%$) –25 to –20 dBm: ($\pm 5\%$)	100 mW avg, or pk 40 Vdc max	Waveguide flange UG-383/U	Net: 0.26 kg (0.53 lb) Shipping: 0.66 kg (1.3 lb)

1. Negligible deviation except for those power ranges noted.

2. Includes 11708A 30 dB attenuator for calibrating against 0 dBm, 50 MHz power reference. The 11708A is factory set to 30 dB $\pm$ 0.05 dB at 50 MHz, traceable to NIST. SWR < 1.05 at 50 MHz.

3. The 8480 Series sensors in the table do not include discontinued models.



N8480 Series Thermocouple Power Sensor Specifications

The N8480 Series power sensors (excluding Option CFT) measure power levels from –35 to +44 dBm (316 nW to 25.1 W), at frequencies from 100 kHz to 50 GHz and have two independent power measurement range (upper and lower range).

Meanwhile, the N8480 sensors with Option CFT only measure power levels from –30 to +44 dBm (1 μ W to 25.1 W) in single range. Similar to the E-Series power sensors, the N8480 Series power sensors are also equipped with EEPROM to store sensor's characteristics such as model number, serial number, linearity, temperature compensation, calibration factor, and so forth.

This feature ensures the correct calibration data is applied by any compatible power meter connected with N8480 Series power sensor, and to ensure the accuracy of the measurements.

Calibration factor uncertainties

Table 15. N8480 Series calibration factor uncertainty at 25 °C $\pm$ 3 °C.

Frequency	N8481A	N8481B	N8481H	N8482A	N8482B	N8482H	N8485A	N8487A	N8486AR	N8486AQ
100 kHz to 10 MHz	–	–	–	0.91	1.48	0.89	–	–	–	–
10 to 30 MHz	0.82	1.42	0.77	0.78	1.43	0.79	0.82	–	–	–
30 to 500 MHz	0.77	1.48	0.89	0.77	1.49	0.89	1.24	1.33	–	–
500 MHz to 1.2 GHz	0.78	1.48	0.89	0.78	1.49	0.89	1.26	1.35	–	–
1.2 to 6 GHz	0.91	1.58	1.06	0.89	1.56	1.02	1.35	1.41	–	–
6 to 14 GHz	1.26	1.77	1.46	–	–	–	1.66	1.61	–	–
14 to 18 GHz	1.59	1.92	1.73	–	–	–	1.83	1.73	–	–
18 to 26.5 GHz	–	–	–	–	–	–	2.67	2.26	–	–
26.5 to 33 GHz	–	–	–	–	–	–	3.32	2.58	2.68	–
33 to 34 GHz	–	–	–	–	–	–	–	2.80	3.19	3.14
34 to 35 GHz	–	–	–	–	–	–	–	2.80	3.19	3.40
35 to 40 GHz	–	–	–	–	–	–	–	2.80	3.19	3.14
40 to 45 GHz	–	–	–	–	–	–	–	3.66	–	3.19
45 to 50 GHz	–	–	–	–	–	–	–	4.23	–	3.26

N8480 Series Thermocouple Power Sensor Specifications (Continued)

Maximum SWR and power linearity for standard N8480 Series power sensors

Table 16. N8480 Series maximum SWR and power linearity.

Model	Frequency range	Maximum SWR ¹	Power linearity ^{1,2}	Maximum power	Connector type	Weight
100 mW sensors. Power range ³ – 316 nW to 100 mW (–35 to +20 dBm)						
N8481A	10 MHz to 18 GHz	10 to 30 MHz: 1.37 30 to 50 MHz: 1.14 50 MHz to 2 GHz: 1.08 2 to 12.4 GHz: 1.16 12.4 to 18 GHz: 1.23	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	Type-N (m)	Net: 0.181 kg (0.40 lb) Shipping: 0.90 kg (1.98 lb)
N8482A	100 kHz to 6 GHz	100 to 300 kHz: 1.54 300 kHz to 1 MHz: 1.17 1 MHz to 2 GHz: 1.06 2 to 6 GHz: 1.07	–1 dBm to +15 dBm (± 0.52%) +15 dBm to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	Type-N (m)	Net: 0.181 kg (0.40 lb) Shipping: 0.90 kg (1.98 lb)
N8485A	10 MHz to 26.5 GHz	10 to 50 MHz: 1.33 50 to 100 MHz: 1.08 100 MHz to 2 GHz: 1.05 2 to 12.4 GHz: 1.14 12.4 to 18 GHz: 1.19 18 to 26.5 GHz: 1.26	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	APC-3.5 mm (m)	Net: 0.183 kg (0.40 lb) Shipping: 0.90 kg (1.98 lb)
N8485A Option 033	10 MHz to 33 GHz	26.5 to 33 GHz: 1.32	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	APC-3.5 mm (m)	Net: 0.183 kg (0.40 lb) Shipping: 0.90 kg (1.98 lb)
N8487A	50 MHz to 50 GHz	50 to 100 MHz: 1.08 100 MHz to 2 GHz: 1.05 2 to 12.4 GHz: 1.10 12.4 to 18 GHz: 1.16 18 to 26.5 GHz: 1.22 26.5 to 40 GHz: 1.30 40 to 50 GHz: 1.34	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	2.4 mm (m)	Net: 0.154 kg (0.34 lb) Shipping: 0.874 kg (1.92 lb)
N8486AR	26.5 to 40 GHz	26.5 to 40 GHz: 1.40	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	Waveguide flange UG-599/U	Net: 0.202 kg (0.45 lb) Shipping: 0.922 kg (2.03 lb)
N8486AQ	33 to 50 GHz	33 to 50 GHz: 1.50	–1 to +15 dBm (± 0.52%) +15 to +20 dBm (± 0.80%)	+25 dBm 15 W/2 μs	Waveguide flange UG-383/U	Net: 0.204 kg (0.45 lb) Shipping: 0.924 kg (2.03 lb)
High power sensors. Power range ³ – 316 μW to 21.1 W (–5 to +44 dBm)						
N8481B	10 MHz to 18 GHz	10 MHz to 2 GHz: 1.09 2 to 12.4 GHz: 1.14 12.4 to 18 GHz: 1.23	+29 to +39 dBm (± 0.52%)	+49 dBm 500 W/1 μs	Type-N (m)	Net: 0.684 kg (1.51 lb) Shipping: 1.404 kg (3.09 lb)
N8482B	100 kHz to 6 GHz	100 kHz to 2 GHz: 1.08 2 to 6 GHz: 1.16	+39 to +44 dBm (± 0.80%)	+49 dBm 500 W/1 μs	Type-N (m)	Net: 0.684 kg (1.51 lb) Shipping: 1.404 kg (3.09 lb)
High power sensors. Power range ³ – 31.6 μW to 3.2 W (–15 to +35 dBm)						
N8481H	10 MHz to 18 GHz	10 MHz to 8 GHz: 1.20 8 to 12.4 GHz: 1.25 12.4 to 18 GHz: 1.30	+17 to +30 dBm (± 0.52%)	+40 dBm 100 W/1 μs	Type-N (m)	Net: 0.234 kg (0.52 lb) Shipping: 0.954 kg (2.10 lb)
N8482H	100 kHz to 6 GHz	100 kHz to 6 GHz: 1.13	+30 to +35 dBm (± 0.80%)	+40 dBm 100 W/1 μs	Type-N (m)	Net: 0.234 kg (0.52 lb) Shipping: 0.954 kg (2.10 lb)

1. At 25 °C ± 10 °C.

2. The N8480 Series power sensors' linearity is negligible except for the power range specified in the table.

3. For N8480 Standard (excluding the CFT option).

N8480 Series Thermocouple Power Sensor Specifications (Continued)

Switch point data

Switching point is applicable for standard N8480 Series power sensors only.

The N8480 Series power sensors have two power measurement ranges; a lower range and upper range. The power meter automatically selects the proper power range. To avoid unnecessary switching when the power level is near switching point, a *Switching Point Hysteresis* has been added.

Switching point hysteresis: 0.5 dB typical

Example of switching point hysteresis on N8481/2H power sensors, this hysteresis causes the lower range to remain selected until approximately 17.5 dBm as the power level is increased, above this power the upper range is selected.

The upper range remains selected until approximately 16.5 dBm as the signal level decreases, below this power the lower range is selected.



For more detailed specifications, refer to *N8480 Series Thermocouple Power Sensors, data sheet (5989-9333EN)*.

U2000 Series USB Power Sensor Specifications

The U2000 Series USB power sensors are true average, wide-dynamic-range RF/microwave power sensors, based on a dual-sensor diode pair/attenuator/diode pair topology.

The U2000 Series USB power sensors can be operated on N1913A/14A via the USB host port (options).

Frequency and power ranges

Table 17. U2000 Series USB sensors frequency and power ranges.

Model	Frequency range	Power range	Maximum power
U2000A	10 MHz to 18 GHz	–60 to +20 dBm	+25 dBm avg, 20 VDC
U2001A	10 MHz to 6 GHz		+33 dBm pk, < 10 μ s
U2002A	50 MHz to 24 GHz		
U2004A	9 kHz to 6 GHz	–60 to +20 dBm	+25 dBm avg, 5 VDC +33 dBm pk, < 10 μ s
U2000B	10 MHz to 18 GHz	–30 to +44 dBm	+45 dBm avg, 20 VDC
U2001B	10 MHz to 6 GHz		+47 dBm pk, 1 μ s
U2000H	10 MHz to 18 GHz	–50 to +30 dBm	+33 dBm avg, 20 VDC
U2001H	10 MHz to 6 GHz		+50 dBm pk, 1 μ s
U2002H	50 MHz to 24 GHz		+33 dBm avg, 10 VDC +50 dBm pk, 1 μ s

Power accuracy

Table 18. U2000 Series USB sensors power accuracy.

Model	Power range	Accuracy ¹ (25 °C $\pm$ 10 °C)	Accuracy ¹ (0 to 55 °C)
U2000/1/2/4A	–60 to +20 dBm	$\pm$ 3.0%	$\pm$ 3.5%
U2000/1/2H	–50 to +30 dBm	$\pm$ 4.0%	$\pm$ 5.0%
U2000/1B	–30 to +44 dBm	$\pm$ 3.5%	$\pm$ 4.0%

1. This accuracy is essentially a combination of linearity, instrumentation accuracy, and traceability to absolute accuracy at 50 MHz, 0 dBm.

Note: Mismatch uncertainty, calibration factor uncertainty, and power level dependent terms (zero set, drift, and noise) are excluded in this specification.

Specifications valid with the following conditions:

- After zeroing
- Number of averages = 1024
- After 30 minutes of power-on warm-up

U2000 Series USB Power Sensor Specifications (Continued)

Maximum SWR

Table 19. U2000 Series USB sensors maximum SWR.

Model	Frequency range	Maximum SWR (25 °C ± 10 °C)	Maximum SWR (0 to 55 °C)
U2000A	10 MHz to 30 MHz	1.15	1.21
	30 MHz to 2 GHz	1.13	1.15
	2 to 14 GHz	1.19	1.20
	14 to 16 GHz	1.22	1.23
	16 to 18 GHz	1.26	1.27
U2001A	10 to 30 MHz	1.15	1.21
	30 MHz to 2 GHz	1.13	1.15
	2 to 6 GHz	1.19	1.20
U2002A	50 MHz to 2 GHz	1.13	1.15
	2 to 14 GHz	1.19	1.20
	14 to 16 GHz	1.22	1.23
	16 to 18 GHz	1.26	1.27
	18 to 24 GHz	1.30	1.30
U2004A	9 kHz to 2 GHz	1.13	1.15
	2 to 6 GHz	1.19	1.20
U2000B	10 MHz to 2 GHz	1.12	1.14
	2 to 12.4 GHz	1.17	1.18
	12.4 to 18 GHz	1.24	1.25
U2001B	10 MHz to 2 GHz	1.12	1.14
	2 to 6 GHz	1.17	1.18
U2000H	10 MHz to 8 GHz	1.15	1.17
	8 to 12.4 GHz	1.25	1.26
	12.4 to 18 GHz	1.28	1.29
U2001H	10 MHz to 6 GHz	1.15	1.17
U2002H	50 MHz to 8 GHz	1.15	1.17
	8 to 12.4 GHz	1.25	1.26
	12.4 to 18 GHz	1.28	1.29
	18 to 24 GHz	1.30	1.31



For more detailed specifications, refer to *U2000 Series USB Power Sensors, data sheet* (5989-6278EN).



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. The business that became Keysight was a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. The business that became Keysight was a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



- Electronic design automation (EDA) software
- Application software
- Programming environments
- Productivity software

Learn more at

www.keysight.com/find/software


Start with a 30-day free trial.

www.keysight.com/find/free_trials

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

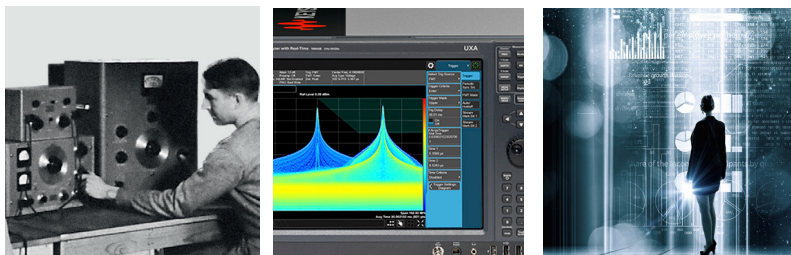

myKeysight

KEYSIGHT SERVICES
Accelerate Technology Adoption.
Lower costs.

