

Figure 9-1 Isolation voltage specifications relative to the enclosure

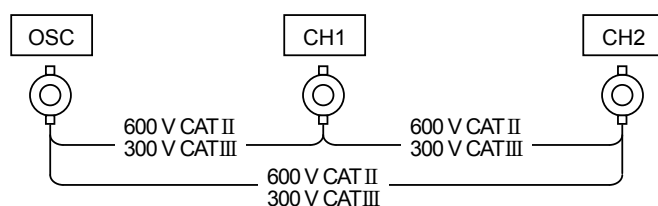


Figure 1-2 Isolation voltage specifications between signal connectors

When cables or probes, etc. are connected to the instrument, the voltage is restricted to the withstand voltage specifications of the connected cable or probe, etc. or to the withstand voltage of the instrument, whichever voltage is lowest.

1.3 Measurement processing section

- Measurement operations

SPOT	Do a measurement at the current frequency (no sweep)
UP SWEEP	Do a sweep measurement (in order of increasing frequency)
DOWN SWEEP	Do a sweep measurement (in order of decreasing frequency)
REPEAT	Do measurements repeatedly
SINGLE	Do a single measurement

- Measurement delay function

This function delays the beginning of a measurement after the frequency is changed.

Delay can be set either a duration or a number of cycles.

Time settings

Setting range	0 to 9,990 s
Setting resolution	3 digits or 0.1 ms, whichever is greater

Cycle settings (set in units of measurement frequency cycle)

Setting range	0 to 9,999 cycles, but no more than 9,990 s
Setting resolution	1 cycle

- Start delay function

This function delays the beginning of a measurement only from the start of a sweep or spot measurement.

Delay can be set either a duration or a number of cycles.

Time settings

1.3 Measurement processing section

Setting range	0 to 9,990 s
Setting resolution	3 digits or 0.1 ms, whichever is greater
Cycle settings (Set in units of measurement frequency cycles)	
Setting range	0 to 9,999 cycles, but no more than 9,990 s
Setting resolution	1 cycle

- Integration function

This function performs integration on measurement data to remove the effects of noise. Measurement repetition can be set either a duration or a number of cycles.

Time setting

Setting range	0 to 9,990 s (The measurement is performed for at least 1 cycle, regardless of the setting.)
Setting resolution	3 digits or 0.1 ms, whichever is greater
Cycle settings (set in units of cycles, taking the signal acquisition time ^{*1} to be one cycle)	
Setting range	1 to 9,999 cycles
Setting resolution	1 cycle

*1: The signal acquisition time is one cycle of the measurement frequency f when f is approximately 1 kHz or less. For higher frequencies, the signal acquisition time ranges between 1.0 ms and 20 ms, depending on the value of f and the cycle setting.

- Automatic integration function

This function repeats the integration process until the variation in the measurement values falls below a set value. However, integration is stopped if the value specified in "9.3 Measurement processing section, ● Integration function" is exceeded.

Setting	FIX, SHORT, MED, or LONG
FIX:	The integration is performed with the settings specified in "1.3 Measurement processing section, ● Integration function", regardless of the variation and measurement values.
Other than FIX:	The integration is performed until the variation becomes small, but the measurement time becomes longer in the order of SHORT < MED < LONG.

*1: The signal acquisition time is one cycle of the measurement frequency f when f is approximately 1 kHz or less. For higher frequencies, the signal acquisition time ranges between 1.0 ms and 20 ms, depending on the value of f and the cycle setting.

- Amplitude compression

This function automatically adjusts the oscillator output amplitude so that the amplitude of the signal input to the reference channel satisfies the target amplitude that is set. This function maintains a constant amplitude for the measurement system to prevent saturation and damage to the measurement system.

Reference channel	CH1 or CH2
Target amplitude setting	
Setting range	1 μ V to 600 Vrms (value before input weight processing)
Setting resolution	3 digits
Voltage limit for the oscillator output	
Setting range	1 mV to 10 Vpk
Setting resolution	3 digits

Allowable error

Setting range	1 to 100%
Setting resolution	1%

Maximum number of retries

Setting range	1 to 9,999
Setting resolution	1

Correction factor

Setting range	1 to 100%
Setting resolution	1%

- Automatic high density sweep (slow sweep)

This function automatically increases the sweep density in the region just before and after a point where there is a large change in the measurement data.

Reference channel	CH1 or CH2
-------------------	------------

Variation

a, b, R

Setting range	0 to 600 Vrms (before input weighting)
Setting resolution	3 digits or 1 μ V, whichever is greater

dBR

Setting range	0 to 1000 dB
Setting resolution	0.01 dB

Phase

Setting range	0 to 180°
Setting resolution	0.01°

- Sequence measurement function

This function performs measurements according to the content of a measurement condition memory.

When an up sweep measurement is performed, the first up sweep is performed over the frequency range that is set in memory number 1. The next up sweep is performed over the range that is set in memory number 2, and so on continuously up to the memory number that has been set as the upper limit memory number.

For down sweep measurement, the first down sweep is performed over the range set in the memory number specified by the upper limit memory number. The next down sweep is performed over the range that is set in the next lower memory number and so on continuously down to memory number 1.

Upper limit memory number	1 to 20
Setting resolution	1

1.4 Analysis processing section

The SI prefixes (k, M, etc.) that are placed before units of measurement and the scales they represent are a (10^{-18}), f (10^{-15}), p (10^{-12}), n (10^{-9}), μ (10^{-6}), m (10^{-3}), k (10^3), M (10^6), and G (10^9).

1.4.1 Common items

- Display unit Gain (ratio, unitless number) or impedance

- Measurement accuracy (fixed range)

Measurement accuracy Relative accuracy + Calibration accuracy

Relative accuracy $\pm (| \text{Basic accuracy} | + | \text{Dynamic accuracy} | + | \text{Inter-range accuracy} \times N |)$,

where N is | number of measurement range steps between channels |.

Example: If the measurement ranges of each channels are 300 V_{rms} and 1 V_{rms}, N is 5 (300 V to 100 V to 30 V to 10 V to 3 V to 1 V).

Calibration accuracy The accuracy of external equipment that is connected to the instrument, such as a shunt resistor or probe, or the accuracy of the calibration standard equipment.

Basic accuracy Upper: gain (ratio); Middle: impedance Z; Lower: phase

Measurement range (rms)	Frequency			
	≤ 100 kHz	≤ 200 kHz	≤ 1 MHz	≤ 2 MHz
600 V	± 0.2 dB ± 2.4 % $\pm 1.2^\circ$	—	—	—
300 V	± 0.1 dB ± 1.2 % $\pm 0.6^\circ$	—	—	—
100 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$	—	—	—
30 V : 30 mV	± 0.01 dB ± 0.12 % $\pm 0.06^\circ$	± 0.025 dB ± 0.29 % $\pm 0.15^\circ$	± 0.1 dB ± 1.2 % $\pm 0.6^\circ$	

Measurement range (rms)	Frequency	
	≤ 5 MHz	≤ 15 MHz
10 V : 30 mV	± 0.2 dB ± 2.4 % $\pm 1.2^\circ$	± 0.5 dB ± 5.9 % $\pm 3.0^\circ$

Conditions: At least 30 cycles of integration, fixed measurement range for both channels, and both channels have the same range. The gain and phase error for when the signal input is at the full scale of the measurement range for both channels.

*For the cells that contain only " — ", the measurement range exceeds the maximum input voltage (see "1.2 Analysis input section, ● Maximum input voltage"), so either the measurement is not possible or there is no accuracy specification for it.

1.4 Analysis processing section

Dynamic accuracy Upper: gain (ratio); Middle: impedance Z; Lower: phase

Measurement range (rms)	Frequency				Measurement range (rms)
	≤ 100 kHz	≤ 200 kHz	≤ 1 MHz	≤ 2 MHz	
600 V		—	—	—	600 V
300 V			—	—	300 V
100 V		± 0.1 dB	—	—	100 V
30 V		± 1.2 %		± 0.2 dB	30 V
:		$\pm 0.6^\circ$		± 2.4 %	:
300 mV				$\pm 1.2^\circ$	300 mV
100 mV					100 mV

Measurement range (rms)	Frequency	
	≤ 5 MHz	≤ 15 MHz
600 V	—	—
:		
30 V		
10 V	± 0.2 dB	± 0.5 dB
:	± 2.4 %	± 6.0 %
100 mV	$\pm 1.2^\circ$	$\pm 3.0^\circ$

Conditions: At least 30 cycles of integration, fixed measurement range for both channels, and both channels have the same measurement range. Gain and phase variation for when the signal level changes from full-scale of measurement range to 1/10. The input signal level is 1:1 or 1:0.1 between channels.

*For the cells that contain only " — ", the measurement range exceeds the maximum input voltage (see "1.2 Analysis input section, • Maximum input voltage"), so either the measurement is not possible or there is no accuracy specification for it.

1.4 Analysis processing section

Inter-range accuracy Upper: gain (ratio); Middle: impedance Z; Lower: phase

Measurement range (rms)	Frequency			
	≤ 100 kHz	≤ 200 kHz	≤ 2 MHz	≤ 15 MHz
600 V	—			
300 V	± 0.1 dB ± 1.2 % $\pm 0.6^\circ$	—	—	—
100 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$	± 0.1 dB ± 1.2 % $\pm 0.6^\circ$	—	—
30 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$		—	—
10 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$			—
3 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$			
1 V	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$			
300 mV	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$			
100 mV	± 0.05 dB ± 0.58 % $\pm 0.3^\circ$			
	—			

Conditions: At least 30 cycles of integration and fixed measurement range for both channels.

The gain and phase error for when the measurement range difference between channels is 1, the input signal levels of both channels are equal, and equal to the range full scale level of the smaller range.

*For the cells that contain only " — ", the measurement range exceeds the maximum input voltage (see "1.2 Analysis input section, • Maximum input voltage"), so either measurement is not possible or there is no accuracy specification for it.

1.4 Analysis processing section

- Measurement accuracy (auto-range)

Measurement accuracy Relative accuracy + Calibration accuracy

Relative accuracy ± (| Basic accuracy | + | Dynamic accuracy |)

Calibration accuracy The accuracy of external equipment that is connected to the instrument, such as a shunt resistor or probe, or the accuracy of the calibration standard equipment.

Basic accuracy Upper: gain (ratio); Middle: impedance Z; Lower: phase

Signal level (rms)	Frequency			
	≤ 100 kHz	≤ 200 kHz	≤ 1 MHz	≤ 2 MHz
7 V	±0.02 dB	±0.02 dB	±0.05 dB	±0.1 dB
	±0.24 %	±0.24 %	±0.58 %	±1.2 %
	±0.12°	±0.12°	±0.3°	±0.6°

Signal level (rms)	Frequency	
	≤ 5 MHz	≤ 15 MHz
7 V	±0.2 dB	±0.5 dB
	±2.4 %	±5.9 %
	±1.2°	±3.0°

Conditions: At least 30 cycles of integration, auto-range for both channels. The gain and phase error for when the input signal level is the same for both channels.

Dynamic accuracy Upper: gain (ratio); Middle: impedance Z; Lower: phase

Signal level (rms)	Frequency				Signal level (rms)
	≤ 100 kHz	≤ 200 kHz	≤ 1 MHz	≤ 2 MHz	
≤ 600 V		—	—	—	≤ 600 V
≤ 300 V		±0.1 dB	—	—	≤ 300 V
≤ 60 V		±1.2 %		—	≤ 60 V
≤ 30 V		±0.6°		±0.2 dB	≤ 30 V
≤ 300 mV				±2.4 %	≤ 300 mV
100 mV ≤				±1.2°	100 mV ≤

Signal level (rms)	Frequency	
	≤ 5 MHz	≤ 15 MHz
≤ 20 V	±0.2 dB	±0.5 dB
100 mV ≤	±2.4 %	±6.0 %
	±1.2°	±3.0°

Conditions: At least 30 cycles of integration, measurement range is AUTO for both channels.

The gain and phase variation for when input signal level with the greater signal level channel changes from 7 V_{rms} to the value of the table, when the input signal level between channel is 1:1 or 1:0.1.

*For the cells that contain only " — ", the measurement range exceeds the maximum input voltage (see "1.2 Analysis input section, ● Maximum input voltage"), so either the measurement is not possible or there is no accuracy specification for it.

- Error correction function

Calibration This function corrects for measurement errors that arise within the instrument itself. It is executed with the provided calibration cables and BNC adapter, connected to the OSC, CH1 and CH2 connectors.

1.4.2 GAIN

● Analysis modes

Ratio	CH1/CH2, CH2/CH1
Amplitude	CH1, CH2

● Graph types

Bode plot	A graph with the frequency on the X axis
Nyquist plot	A graph with the real part on the X axis and the imaginary part on the Y axis
Nichols plot	A graph with gain on the X axis and phase on the Y axis

● Measurement data items and display range

The actual measured values and display range for each parameter are constrained by the measurement range and the frequency, etc.

dBR (gain dB) ± 999.999 dB, resolution 0.001 dB

θ (phase)

$\pm 180^\circ$ -180.000° to 179.999° , resolution 0.001 $^\circ$

0 to 360° 0.000° to 359.999° , resolution 0.001 $^\circ$

-360 to 0° -360.000° to -0.001° , resolution 0.001 $^\circ$

UNWRAP -9999.999° to $+9999.999^\circ$, resolution 0.001 $^\circ$

GD (group delay) $\pm(1$ a to 999.999 G)s or 0 s, resolution 6 digits or 1 a

(when the analysis mode setting is CH1/CH2 or CH2/CH1)

R (absolute gain) 0 to 999.999 G (ratio, unitless number), resolution 6 digits or 1 a

a (real part of gain) $\pm(1$ a to 999.999 G) or 0 (ratio, unitless number), resolution 6 digits or 1 a
b (imaginary part of gain)

$\pm(1$ a to 999.999 G) or 0 (ratio, unitless number), resolution 6 digits or 1 a

(when the analysis mode setting is CH1 or CH2)

R (amplitude) 0 Vrms to 999.999 GVrms, resolution 6 digits or 1 aVrms

a (real part of amplitude)

$\pm(1$ a to 999.999 G) Vrms or 0 Vrms, resolution 6 digits or 1 aVrms

b (imaginary part of amplitude)

$\pm(1$ a to 999.999 G) Vrms or 0 Vrms, resolution 6 digits or 1 aVrms

● Measurement accuracy for other than R and θ

Accuracy of measurement items other than R (absolute gain) and θ (phase). Where defined the accuracy of R as R_a %, the accuracy of θ as θ_a , and the measurement value of θ as θ_x , specified in "1.4.1

Common items, ● Measurement accuracy (fixed range) and ● Measurement accuracy (AUTO range)".

GD (group delay) $\pm\{\theta_a / (APT \times 360)\}$ s

APT: The unit for aperture in the group delay display is hertz

a (real part of gain) $\pm(R_a / \cos \theta_x)\%$

b (imaginary part of gain) $\pm(R_a / \sin \theta_x)\%$

● Error correction function

Equalizing

This function obtains the characteristics for the measurement target alone by measuring the frequency characteristics of the measurement system (sensors, cables, etc.) in advance and then eliminate that error component for the measurement system when the actual measurements are performed later.

1.4.3 IMPEDANCE

- Voltage and current input Voltage is measured as the measurement amplitude at CH1 and current is measured as the measurement amplitude at CH2.

- Analysis modes

Impedance	CH1 / CH2
Admittance	CH2 / CH1
Voltage	CH1
Current	CH2

- Graph types

Bode plot	A graph with the frequency on the X axis.
Nyquist plot	A graph with the real part on the X axis and the imaginary part on the Y axis.
Cole-cole plot	A graph with the real part on the X axis and the imaginary part on the Y axis. However, the upper side of Y axis is minus.

- Measurement data items and display range

The actual measured values and display range for each parameter are constrained by the measurement range and the frequency, etc.

Z (impedance)	0 Ω to 999.999 G Ω , resolution 6 digits or 1 a Ω
R, X (resistance, reactance)	$\pm(1 \text{ a to } 999.999 \text{ G})\Omega$ and 0 Ω , resolution 6 digits or 1 a Ω
Y (admittance)	0 S to 999.999 GS, resolution 6 digits or 1 aS
G, B (conductance, susceptance)	$\pm(1 \text{ a to } 999.999 \text{ G})\text{S}$ and 0 S, resolution 6 digits or 1 aS
Ls, Lp (inductance)	$\pm(1 \text{ a to } 999.999 \text{ G})\text{H}$ and 0 H, resolution 6 digits or 1 aH
Cs, Cp (capacitance)	$\pm(1 \text{ a to } 999.999 \text{ G})\text{F}$ and 0 F, resolution 6 digits or 1 aF
Rs, Rp (resistance)	$\pm(1 \text{ a to } 999.999 \text{ G})\Omega$ and 0 Ω , resolution 6 digits or 1 a Ω

The suffixes s and p for L, C, and R respectively represent the serial component and parallel components.

V (voltage)	0 Vrms to 999.999 GVrms, resolution 6 digits or 1 aVrms
I (current)	0 Vrms to 999.999 GARms, resolution 6 digits or 1 aARms
θ (phase)	
$\pm 180^\circ$	-180.000° to 179.999° , resolution 0.001 $^\circ$
0 to 360°	0.000° to 359.999° , resolution 0.001 $^\circ$
-360 to 0°	-360.000° to -0.001° , resolution 0.001 $^\circ$
UNWRAP	-9999.999° to $+9999.999^\circ$, resolution 0.001 $^\circ$
D (dissipation factor)	$\pm(0.00001 \text{ to } 99999.9)$ and 0 (unitless number)
Q (quality factor)	$\pm(0.00001 \text{ to } 99999.9)$ and 0 (unitless number)

● Measurement accuracy for other than Z and θ

Accuracy of measurement items other than Z (impedance) and θ (phase). Where defined the accuracy of Z as Z_a %, and the measurement value of θ as θ_x , specified in "9.4.1 Common items, ● Measurement accuracy (fixed range) and ● Measurement accuracy (AUTO range)".

Y $\pm Z_a$ %

R, Rs, Rp, G $\pm(Z_a / \cos \theta_x)$ %

X, B, Ls, Lp, Cs, Cp $\pm(Z_a / \sin \theta_x)$ %

D $\pm(0.01 \times Z_a)$

When $|D_x| \leq 0.1$; D_x is the measured value of D.

The measurement accuracy of D is not a percent value, but the value itself.

Q $\pm \{(Q_x^2 \times P_e / (1 - |Q_x| \times P_e))\}$

When $(|Q_x| \geq 10)$ and $(|Q_x| \times P_e \leq 0.1)$.

Q_x is the measured value of Q. $P_e = 0.01 \times Z_a$.

The measurement accuracy of Q is not a percent value, but the value itself.

● Error correction function

Open correction Corrects the residual admittance

Short correction Corrects the residual impedance

Load correction Corrects the voltage-current conversion coefficient of the measurement system

Load standard value Standard values can be entered for up to 10 frequency points.

Port extension Corrects the error due to phase delay in cables for 2-port measurements.

Characteristic impedance

Setting range 1.00 Ω to 999 Ω , resolution 3 digits

Electrical length

Setting range 0.000 m to 999.999 m, resolution 0.001 m

Slope compensation ON/OFF

This function performs analysis that is unaffected by the DC level for signals that have a superimposed DC level that varies linearly over time. It is used when measuring the impedance of batteries during charging and discharging.

1.5 Display section

- Display unit 8.4-inch color TFT-LCD (SVGA) with touch screen
- Graph display styles
 - SINGLE One graph is displayed on the screen.
 - SPLIT Two graphs are displayed on the screen, one above the other.
- Graph axis setting The X, Y1, and Y2 axes can each be set to Lin, Log individually.
- Data traces Reference data trace (REF) or measurement data trace (MEAS)
- Auto scaling On or off
This function automatically optimizes the graph display scale.
- Marker display
 - Main marker The main marker is displayed on the data, and the data value at the position specified by the marker is displayed.
 - Delta marker The delta marker and the main marker are displayed on the data, and the difference between the data values indicated by the two markers is displayed.
- Marker search function
 - Search items
 - Max, Min Search for the maximum and minimum values
 - Peak, Bottom Search for the peak (maximal) and the bottom (minimal) values
 - NextPeak Search for the next peak
 - NextBottom Search for the next bottom
 - Value Search for the marker value
 - △Value Search for the difference between the delta marker and the main marker values
 - XValue Search for frequency
 - It is possible to automatically perform a search at the end of a sweep measurement.
- Display of the measurement conditions for the measured data
The main measurement conditions for when the data that is being displayed was measured are displayed.
- Title display It is possible to specify titles for the measurement data and reference data.

1.6 Memory

- Measurement data (MEAS) The data from the sweep measurement
Up to 20 sets of data can be stored in internal memory.
- Reference data (REF) Data that can be displayed on a graph together with the measurement data (MEAS). This can be measurement data or data loaded from a USB memory device. The display can be turned on or off.
- Error correction data Data that is used for equalizing
- Measurement conditions 20 sets

Except for data that is not stored in internal memory, measurement data is retained, even if the power is turned off.

1.7 External memory

- Media USB memory device
- Connections Front panel, USB-A connector
- File system FAT
- Memory contents Measurement conditions, measurement data (MEAS), reference data (REF), and screen capture data
- Screen capture function
 - File format MS Windows bitmap file
(extension: .BMP, image size: 800 × 600)
 - Approximate file size 1.9 MB
 - File name FRAnnn.BMP
(nnn: three digit number, incremented automatically, initial value can be set)
 - File save destination Root folder

1.8 External input/output function

- GPIB
 - Standards conformance IEEE488.1 and IEEE488.2
 - Connector Rear panel, GPIB connector
 - Interface functions SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT0, C0, E1
- USB
 - Specification USB 2.0 HighSpeed
 - Connector Rear panel, USB-B connector
 - Device class TMC
- LAN
 - Specification 10/100Base-T
 - Connector Rear panel, RJ-45 connector
 - Protocols TCP/IP (socket communication)
- RS-232
 - Baud rate 4800 / 9600 / 19200 / 38400 / 57600 / 115200 / 230400 bps
At baud rate that exceed 19200 bps, the characteristics of the cable and controller may prevent communication.
 - Flow control None / software (X-ON/X-OFF) / hardware (RTS/CTS)
- External monitor
 - For connecting a projector, external monitor, etc.
 - Connector Rear panel, VGA (mini D-sub15 pin, female)
 - Signal 800 × 600 pixels (SVGA), analog RGB component video signal
 - Horizontal frequency 37.9 kHz
 - Vertical frequency 60.3 Hz
 - Scanning Progressive

1.8 External input/output function

- Reference clock input

Connector	Rear panel, BNC connector
Input impedance	300 Ω (nominal), AC coupling
Frequency	10 MHz \pm 100 ppm or under
Input waveform	Sinusoidal or square
Input voltage	0.5 Vp-p to 5 Vp-p
Maximum nondestructive input voltage	10 Vp-p
Signal grounding	Isolated from the enclosure, maximum 42 Vpk (DC + ACpk)

- Reference clock output

Connector	Rear panel, BNC connector
Output impedance	50 Ω (nominal), AC coupling
Frequency	10 MHz \pm 10 ppm (when operating on the internal reference clock) When the instrument is operating on an external reference clock, the input reference clock frequency is output as it is.
Output waveform	1 Vp-p / 50 Ω , square waveform

- DC power output

This is a power supply outlet that is used by the "5055 SIGNAL INJECTOR / PROPE" (optional) manufactured by the NF Corporation.

Connector	Rear panel, AUX
Output voltage	Approximately \pm 24 V

- Thermal printer

If the thermal printer described below is connected to the instrument via the USB port on the front panel, it is possible to print a hard copy of the image displayed on the LCD screen of this instrument.

Manufacturer	Seiko Instruments Inc.
Name	Thermal printer
Model	DPU-S445-00B-E

Only the printer described above can be used.

The printer is not handled by the NF Corporation. For more information on the printer, please refer to the instruction manual for the printer.

1.9 Miscellaneous specifications


- Power input
 - Voltage AC 100 V to 230 V $\pm 10\%$, however 250 V or less
 - Frequency 50 Hz/60 Hz ± 2 Hz
 - Power consumption 100 VA or less
 - Overvoltage category II
- Cooling Forced air cooling, rear exhaust
- Installation attitude Horizontal ($\pm 10^\circ$ or less)
- Environment

Range of ambient temperature and humidity

Operation +5 °C to +40°C, 5 to 85% RH
(absolute humidity 1 to 25 g/m³, no condensation)
Altitude of 2000 m or less

Storage -10°C to + 50°C, 5 to 95%RH
(absolute humidity 1 to 29 g/m³, no condensation)

Pollution degree 2

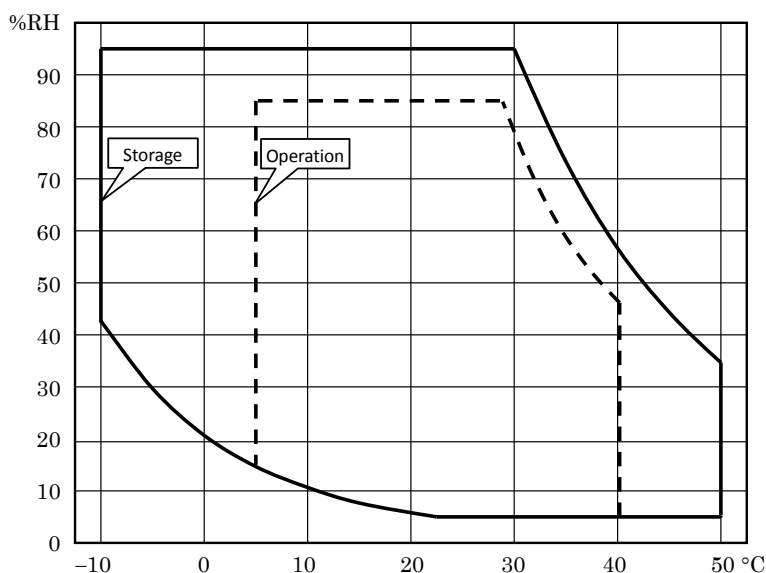

- Warm-up time 30 minutes
- External dimensions 430 mm (W) × 177 mm (H) × 350 mm (D) (excluding protruding parts)
- Weight Approximately 8.5 kg
(Main unit only, excluding accessories and optional equipment, etc.)
- Safety standards and EMC EN61010-1, EN61010-2-030
EN61326-1 (Group 1, Class A), EN61326-2-1
EN61000-3-2, EN61000-3-3
Note: Applies to products that have a CE marking displayed on the rear panel.
Note: The measurement error may occur if this equipment is exposed to a strong radiated radio frequency electromagnetic field.
- RoHS directive Directive 2011/65/EU

1.9 Miscellaneous specifications

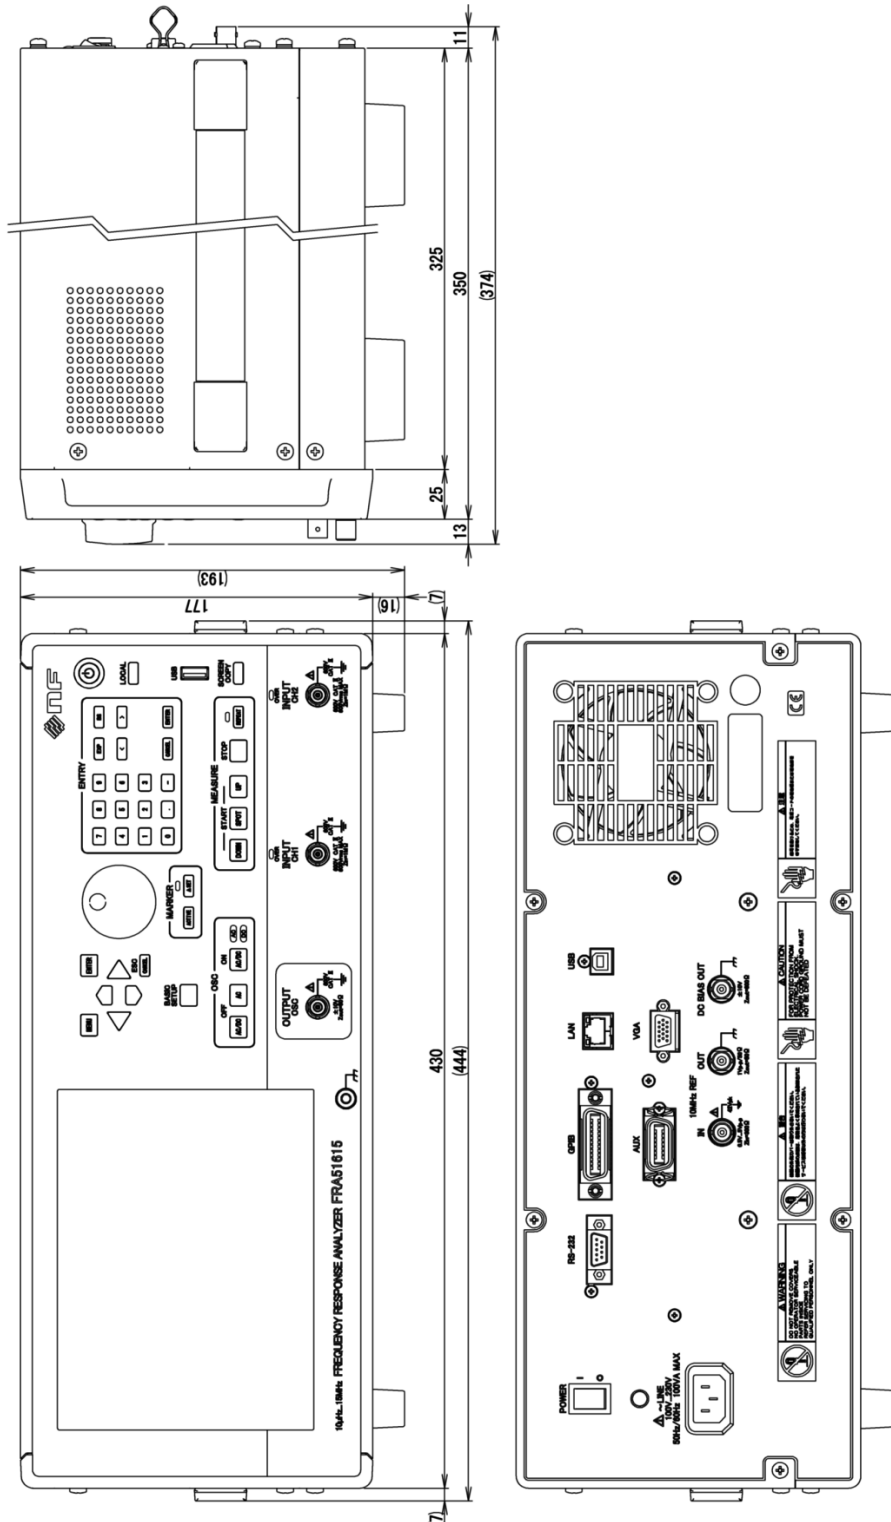


Figure 1-3 External dimensions