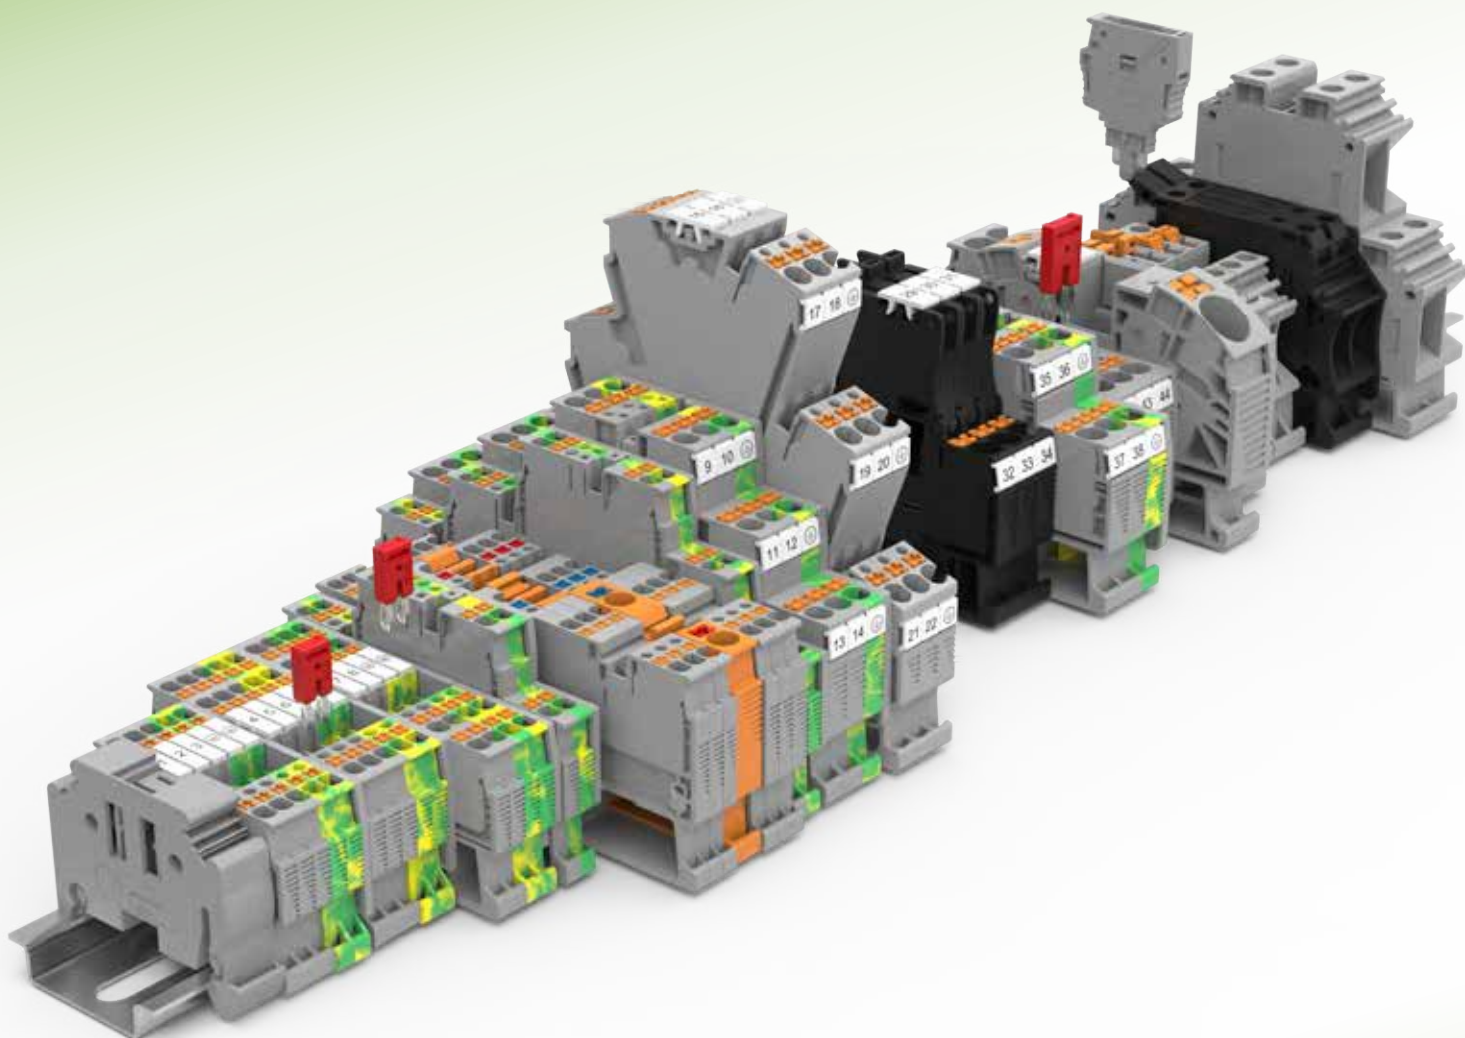


Din Rail Terminal Block



BRIEF INTRODUCTION

01 DEGSON was founded in 1990. DEGSON is a world-renowned manufacturer of overall solutions for industrial connectors. DEGSON'S laboratory is UL-CTDP (USA) and VDE-TDAP (Germany) dual accreditation laboratory, it is also a CNAS laboratory. The company achieved ISO9001, ISO14001, ISO80079-34, ISO/TS22163 and IATF16949 management system certifications.

03 DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, E-bike industrial elevator, lighting, security, machinery, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

02 DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.

04 Based on the core values of "Clients First, Win-win Strategy, Responsibility Integrity, Excellence Pursuit", DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.



UL-CTDP (USA), VDE-TDAP (Germany) and CNAS labs

Strategic cooperation with UL and VDE



1 | 2
3

- ① The general manager of UL global energy & technology division visit our company
- ② Sven Ohrke, President of VDE global services, comes to DEGSON to discuss strategic cooperation
- ③ VDE Laboratory Accreditation: In July 2010, VDE Issued the "VDE Authorized Laboratory" Certificate to DEGSON's laboratory.

UL laboratory accreditation: UL formally issued "UL WTDP" certification to DEGSON in March 2013.
On April, 2016, UL-CTDP.
On December, 2016, VDE-TDAP.
On January, 2017, Pass IRIS system audit.



ISO9001



ISO14001



CNAS



ISO/TS 22163



UL CTDP



VDE TDAP



EX certificate



UL Certificates:10,
Covering 4000+Products



VDE Certificates:175,
Covering 3000+Products



TUV certificate



EAC certificate



European invention patent

CONTENTS

Din rail terminal blocks series

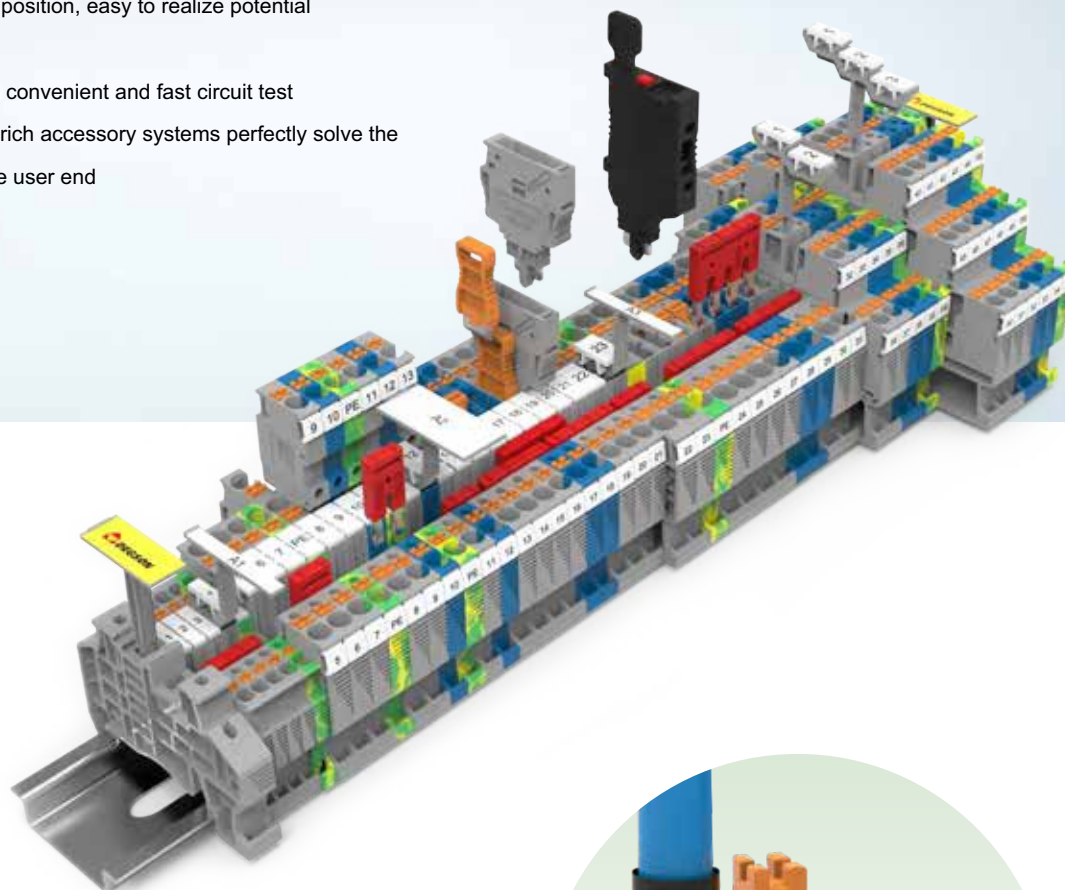
DS Push-in series.....	01-06
WS Spring-cage series.....	07-11
STB Spring-cage series.....	12-13
DC Steel screw series.....	14-17
PC Brass screw series	18-21
DHV High-voltage screw series.....	22-23
BS Bolt connection series	24-25

Accessories & marking system

Marking System	26-28
Terminal blocks marker	28-29

DS-Push-in Connection Terminal Blocks

- Adopt Push-in connection technology, no tools for wiring, high efficiency and quick connection
- Double channel bridge position, easy to realize potential distribution
- Standardized test hole, convenient and fast circuit test
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end



DS push-in connection technology terminal blocks, imported stainless steel spring, unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40°C to 105°C, and all DS series of din rail products are in line with UL94 V0 flame retardant grade.

The push-in spring structure design greatly improves the connection efficiency. Solid wire or stranded wire processed by terminals can be inserted directly without tools.




DS1.5

CE	500V/17.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/45/1.5mm		


DS1.5-PE

CE	—	0.14-1.5mm ²
UL	—	26-14AWG
T/W/End plate 3.5/45/1.5mm		


DS1.5-TW

CE	500V/17.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/54/1.5mm		


DS1.5-TW-PE

CE	—	0.14-1.5mm ²
UL	—	26-14AWG
T/W/End plate 3.5/54/1.5mm		


DS1.5-QU

CE	500V/17.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/63.2/1.5mm		


DS1.5-QU-PE

CE	—	0.14-1.5mm ²
UL	—	26-14AWG
T/W/End plate 3.5/63.2/1.5mm		


DSKK1.5

CE	500V/16A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/68.2/1.5mm		


DSKK1.5-PV

CE	500V/16A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/68.2/1.5mm		


DSKK1.5-PE

CE	—	0.14-1.5mm ²
UL	—	26-16AWG
T/W/End plate 3.5/68.2/1.5mm		


DS1.5-3L

CE	500V/15A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/102/1.5mm		


DS1.5-3L-PV

CE	500V/15A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/102/1.5mm		


DS1.5-3L-PE

CE	—	0.14-1.5mm ²
UL	—	26-16AWG
T/W/End plate 3.5/102/1.5mm		


DS1.5-3L-L/L/PE

CE	500V/15A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/102/1.5mm		


DS1.5-3L-L/N/PE

CE	500V/15A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/102/1.5mm		


DS2.5

CE	800V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		


DS2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		


DS2.5-TW

CE	800V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/60.5/1.5mm		


DS2.5-TW-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/60.5/1.5mm		


DS2.5-QU

CE	800V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/72.2/1.5mm		


DS2.5-QU-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/72.2/1.5mm		


DSKK2.5

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/68.2/1.5mm		


DSKK2.5-PV

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/68.2/1.5mm		


DSKK2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/68.2/1.5mm		


DS2.5-3L


CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		


DS2.5-3L-PV


CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		


DS2.5-3L-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/102/1.5mm		


DS2.5-3L-L/L/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		


DS2.5-3L-L/N/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		


DS2.5-PE/3L

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		


DS4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		


DS4-TW

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/66.5/1.5mm		


DS4-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/66.5/1.5mm		


DS4-QU

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/77/1.5mm		


DS4-QU-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/77/1.5mm		


DSKK 4

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		


DSKK4-PV

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		


DSKK4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		


DS6

CE	1000V/41A	0.5-10mm ²
UL	600V/50A	20-8AWG
T/W/End plate 8.2/58/1.5mm		


DS6-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/58/1.5mm		


DS6-TW

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate 8.2/74.2/1.5mm		


DS6-TW-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/74.2/1.5mm		


DS6-QU

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate 8.2/90.4/1.5mm		


DS6-QU-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/90.4/1.5mm		


DS10

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate 10.2/67.7/1.5mm		


DS10-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate 10.2/67.7/1.5mm		


DS10-TW

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate 10.2/88.9/1.5mm		


DS10-TW-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate 10.2/88.9/1.5mm		


DS16

CE	1000V/76A	0.5-25mm ²
UL	600V/85A	20-4AWG
T/W/End plate 12.2/75.4/1.5mm		


DS16-PE

CE	—	0.5-25mm ²
UL	—	20-4AWG
T/W/End plate 12.2/75.4/1.5mm		


DS16-TW

CE 1000V/76A 0.5-25mm²

UL 600V/85A 20-4AWG

T/W/End plate 12.2/100.4/1.5mm


DS16-TW-PE

CE — 0.5-25mm²

UL — 20-4AWG

T/W/End plate 12.2/100.4/1.5mm


DS4-HE

CE 400V/6.3A 0.2-6mm²

UL 300V/6.3A 24-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS4-HE-LD24

CE 24V/6.3A 0.2-6mm²

UL — 24-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS4-HE-LD60

CE 60V/6.3A 0.2-6mm²

UL — 24-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS4-HE-LD250

CE 250V/6.3A 0.2-6mm²

UL — 24-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS2.5-MT

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/62/1.5mm


DS2.5-TG

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/62/1.5mm


DS2.5-TW-MT

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/73.7/1.5mm


DS2.5-TW-TG

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/73.7/1.5mm


DS2.5-QU-MT

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/84/1.5mm


DS2.5-QU-TG

CE 400V/20A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/84/1.5mm


DS4-MT

CE 500V/20A 0.2-6mm²

UL 300V/20A 26-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS4-TG

CE 500V/20A 0.2-6mm²

UL 300V/20A 26-10AWG

T/W/End plate 6.2/55.6/1.5mm


DS6-MT

CE 500V/20A 0.5-10mm²

UL 300V/20A 20-8AWG

T/W/End plate 8.2/74.2/-mm


DS6-TG

CE 500V/20A 0.5-10mm²

UL 300V/20A 20-8AWG

T/W/End plate 8.2/74.2/-mm


DS2.5/1P

CE 500V/24A 0.14-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.2/48.6/1.5mm


DS2.5/1P-PE

CE — 0.14-4mm²

UL — 26-12AWG

T/W/End plate 5.2/48.6/1.5mm


DS2.5/2P

CE 500V/24A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/48.6/1.5mm


DS2.5/2P-PE

CE — 0.14-4mm²

UL — 26-12AWG

T/W/End plate 5.2/48.6/1.5mm


DS2.5-TW/1P

CE 500V/24A 0.14-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.2/60.5/1.5mm


DS2.5-TW/1P-PE

CE — 0.14-4mm²

UL — 26-12AWG

T/W/End plate 5.2/60.5/1.5mm


DS2.5-QU/2P

CE 500V/24A 0.14-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.2/81.1/1.5mm


DS2.5-QU/2P-PE

CE — 0.14-4mm²

UL — 26-12AWG

T/W/End plate 5.2/81.1/1.5mm


DS2.5-QU/4P

CE 500V/24A 0.14-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.2/89.6/1.5mm


DS2.5-QU/4P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/89.6/1.5mm	


DSKK2.5/2P

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/73.5/1.5mm	


DSKK2.5/2P-PV

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/73.5/1.5mm	


DSKK2.5/2P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/73.5/1.5mm	


DS4/1P

CE	800V/32A	0.2-6mm ²
UL	600V/28A	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	


DS4/1P-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate	6.2/55.6/1.5mm	


DSIO1.5/3

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate	3.5/74.4/2.2mm	


DSIO1.5/3-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate	3.5/74.4/2.2mm	


DSIO1.5/4

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate	3.5/90.9/2.2mm	


DSIO1.5/4-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate	3.5/90.9/2.2mm	


DSIO-IN 2.5/3 OG


CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate	7/74.4/2.2mm	


DSIO-IN 2.5/4-PE OG

CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate	7/90.9/2.2mm	


DS2.5-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/48.6/1.5mm	


DS2.5-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/48.6/1.5mm	


DS2.5-TW-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/60.5/1.5mm	


DS2.5-TW-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/60.5/1.5mm	


DS2.5-QU-LD L-R


CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/72.2/1.5mm	


DS2.5-QU-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3KV) 26-12AWG	
T/W/End plate	5.2/72.2/1.5mm	


DSV2.5

CE	600V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate	5.2/50.8/1.5mm	


DSV2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/50.8/1.5mm	


DSKKS2.5

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/82/1.5mm	


DSKKS2.5-PV

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate	5.2/82/1.5mm	


DSKKS2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate	5.2/82/1.5mm	


DSKKS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate	6.2/92/1.5mm	


DSKKS4-PV

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate	6.2/92/1.5mm	


DSKKS4-PE


CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/92/1.5mm		


DSHV2.5-2000

CE	2000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 6.2/57/1.5mm		


DSS2.5-3L-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DSS2.5-3L-PV-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DSS2.5-3L-PE-01A(H)

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DSS2.5-3L-L/L/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DSS2.5-3L-L/N/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		


DFBXX-3.5

DFBXX-3.5 → DS1.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		


DFBXX-5.2

DFBXX-5.2 → DS2.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		


DFBXX-6.2

DFBXX-6.2 → DS4 Series		
XX: NO. OF POLE		
2-10POLES		


DFBXX-8.2

DFBXX-8.2 → DS6 SERIES		
XX: NO. OF POLE		
2-10POLES		


DFBXX-10.2

DFBXX-10.2 → DS10 SERIES		
XX: NO. OF POLE		
2-10POLES		


DFBXX-12.2

DFBXX-12.2 → DS16 Series		
XX: NO. OF POLE		
2POLES		


DS-CO

DS-CO → DS2.5-TG DS4-TG		
DS6-TG DC4-TG		


DS-DI

DS-DI → DS2.5-TG DS4-TG		
DS6-TG DC4-TG		


DS-FU5

DS-FU5 → DS2.5/DS4/DS6/ DC4-TG		
CE	400V/6.3A	UL 300V/10A


DS-FU5-LD24

DS-FU5-LD24 → DS2.5/DS4/DS6/ DC4-TG		
CE	24V/6.3A	UL —


DSP2.5-H

DSP2.5-H →		
DS2.5/1P DS2.5/1P-PE		
DS2.5/2P DS2.5/2P-PE		
DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		


DSP2.5-C

DSP2.5-C →		
DS2.5/1P DS2.5/1P-PE		
DS2.5/2P DS2.5/2P-PE		
DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		


DSP2.5-L

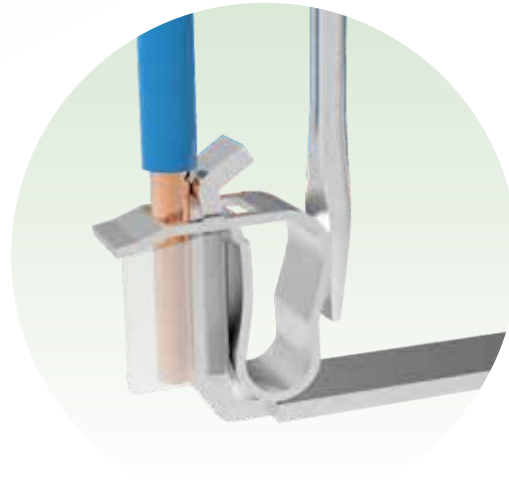
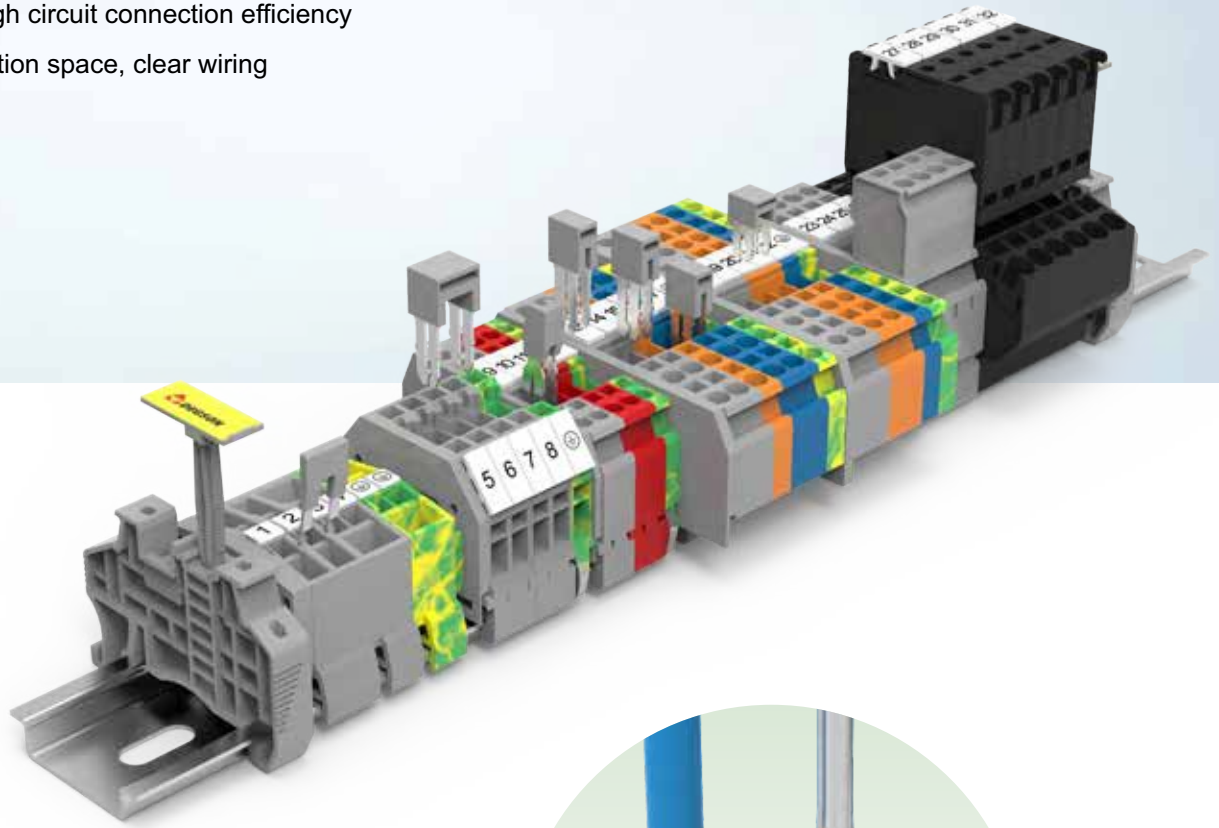
DSP2.5-L →		
DS2.5/1P DS2.5/1P-PE		
DS2.5/2P DS2.5/2P-PE		
DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		


DSP4-H

DSP4-H → DS4/1P		
DS4/1P-PE		
In addition, it can also be adapted to various types of DS4 series plug-in terminal blocks		

WS-Spring-cage Connection Terminal Blocks

- Proven Spring-cage connection technology with excellent seismic performance
- The spring compression force is constant, and the connection is stable and reliable.
- Pluggable bridge, high circuit connection efficiency
- Large area identification space, clear wiring



The WS spring-cage connection technology terminal block adopts imported stainless steel spring, and the unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66's plastic parts can meet the working environment of -40°C to 105°C, and all WS series of din rail products are in line with UL94 V0 flame retardant grade. The spring-cage structure design makes the wiring efficiency higher than screw type. People just use a slotted screwdriver to connect solid wire or stranded wire processed by terminals.




WS1.5
CE 800V/18A 0.2-1.5mm²
UL 600V/10A 28-16AWG

T/W/End plate 4/51.8/2.5mm


WS1.5-PE
CE — 0.2-1.5mm²
UL — 28-16AWG

T/W/End plate 4/51.8/2.5mm


WS1.5-TW
CE 800V/18A 0.2-1.5mm²
UL 600V/10A 28-16AWG

T/W/End plate 4/62.5/2.5mm


WS1.5-TW-PE
CE — 0.2-1.5mm²
UL — 28-16AWG

T/W/End plate 4/62.5/2.5mm


WS1.5-QU
CE 800V/18A 0.2-1.5mm²
UL 600V/10A 28-16AWG

T/W/End plate 4/73/2.5mm


WS1.5-QU-100A(H)
CE 800V/18A 0.2-1.5mm²
UL 600V/10A 28-16AWG

T/W/End plate 4/68/2.5mm


WS1.5-QU-PE
CE — 0.2-1.5mm²
UL — 28-16AWG

T/W/End plate 4/73/2.5mm


WS1.5-DB
CE 800V/17.5A 0.2-1.5mm²
UL 300V/10A 28-16AWG

T/W/End plate 5/25/2.5mm


WS1.5-DB-11A(H)
CE 800V/17.5A 0.2-1.5mm²
UL 300V/10A 28-16AWG

T/W/End plate 5/25/2.5mm


WS1.5T-DB
CE 800V/17.5A 0.2-1.5mm²
UL 300V/10A 28-16AWG


T/W/End plate 8/25/2.5mm


WS1.5T-DB-11A(H)
CE 800V/17.5A 0.2-1.5mm²
UL 300V/10A 28-16AWG

T/W/End plate 4/25/2.5mm


WS2.5
CE 800V/24A 0.2-2.5mm²
UL 600V/15A 28-14AWG

T/W/End plate 4/53/2.5mm


WS2.5-PE
CE — 0.2-2.5mm²
UL — 28-14AWG


T/W/End plate 5/53/2.5mm


WS2.5-TW
CE 800V/24A 0.2-2.5mm²
UL 600V/15A 28-14AWG


T/W/End plate 5/64.2/2.5mm


WS2.5-TW-PE
CE — 0.2-2.5mm²
UL — 28-14AWG

T/W/End plate 5/64.2/2.5mm


WS2.5-QU
CE 800V/24A 0.2-2.5mm²
UL 600V/15A 28-14AWG

T/W/End plate 5/75.5/2.5mm


WS2.5-QU-PE
CE — 0.2-2.5mm²
UL — 28-14AWG

T/W/End plate 5/75.5/2.5mm


WS2.5-DB
CE 800V/24A 0.2-2.5mm²
UL 300V/15A 28-14AWG

T/W/End plate 6/28/2.5mm


WS2.5-DB-11A(H)
CE 800V/24A 0.2-2.5mm²
UL 300V/15A 28-14AWG

T/W/End plate 6/28/2.5mm


WS2.5-DIN15
CE 800V/24A 0.2-2.5mm²
UL 600V/20A 28-14AWG

T/W/End plate 6/32/4.0mm


WS2.5-DIN15-PE
CE — 0.2-2.5mm²
UL — 28-12AWG

T/W/End plate 6/32/4.0mm


WS2.5-DIN35
CE 800V/24A 0.2-2.5mm²
UL 600V/20A 28-14AWG

T/W/End plate 6/32/4.0mm


WS2.5-MID-CO
CE 800V/24A 0.2-2.5mm²
UL 600V/20A 28-14AWG

T/W/End plate 6/32/4.0mm


WS2.5-END-CO
CE 800V/24A 0.2-2.5mm²
UL 600V/20A 28-14AWG

T/W/End plate 12/32/4.0mm


WS2.5T-DB
CE 800V/24A 0.2-2.5mm²
UL 300V/15A 28-14AWG

T/W/End plate 10/28/2.5mm


WS2.5T-DB-11A(H)

CE	800V/24A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
T/W/End plate 10/28/2.5mm		


WS2.5T-DIN15

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		


WS2.5T-DIN35

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		


WS2.5T-MID-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		


WS2.5T-END-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		


WS4

CE	800V/24A	0.2-4mm ²
UL	600V/15A	28-14AWG
T/W/End plate 6/60.4/2.5mm		


WS4-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/60.4/2.5mm		


WS4-DB

CE	630V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 7/73.4/2.5mm		


WS4-TW

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/73.5/2.5mm		


WS4-TW-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/73.5/2.5mm		


WS4-QU

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/86.2/2.5mm		


WS4-QU-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/86.2/2.5mm		


WS4T-DB

CE	800V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 12/33.4/2.5mm		


WS6

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/74.5/2.5mm		


WS6-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/74.5/2.5mm		


WS6-TW

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/93/2.5mm		


WS6-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/93/2.5mm		


WS10

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/77.5/2.5mm		


WS10-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/77.5/2.5mm		


WS10-TW

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/97.5/2.5mm		


WS10-TW-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/97.5/2.5mm		


WS16

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/94.5/2.5mm		


WS16-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/94.5/2.5mm		


WS16-TW

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/104.5/2.5mm		


WS16-TW-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/104.5/2.5mm		


WS35

CE 1000V/125A 0.5-35mm²

UL 600V/115A 24-2AWG

T/W/End plate 16/99.9/-mm


WS35-PE

CE — 0.5-35mm²

UL — 24-2AWG

T/W/End plate 16/99.9/-mm


WS2.5-TW-TA

CE 800V/24A 0.2-2.5mm²

UL 600V/15A 28-14AWG

T/W/End plate 5/50.5/2.5mm


WS2.5-TW-TA-PE

CE — 0.2-2.5mm²

UL — 28-14AWG

T/W/End plate 5/50.5/2.5mm


WSF4-TA

CE 400V/6.3A 0.5-4mm²

UL 300V/6.3A 28-10AWG

T/W/End plate 6/60/-mm


WSF4-TA-10A(H)

CE 250V/10A 0.2-4mm²

UL — 28-10AWG

T/W/End plate 6/60/-mm


WSF4-TA-LD24

CE 24V/6.3A 0.2-4mm²

UL — 28-10AWG

T/W/End plate 6/60/-mm


WSF4-TA-LD60

CE 60V/6.3A 0.2-4mm²

UL — 28-10AWG


T/W/End plate 6/60/-mm


WSF4-TA-LD250

CE 250V/6.3A 0.2-4mm²

UL — 28-10AWG

T/W/End plate 6/60/-mm


WS2.5-QU-LD-L-R

CE 250V/0.5A 0.2-2.5mm²

UL (Reverse breakdown voltage 1KV) 28-14AWG

T/W/End plate 5/75.5/2.5mm


WS2.5-QU-LD-R-L

CE 250V/0.5A 0.2-2.5mm²

UL (Reverse breakdown voltage 1KV) 28-14AWG

T/W/End plate 5/75.5/2.5mm


WS1.5-SD

CE 800V/18A 0.2-1.5mm²

UL 600V/10A 28-16AWG

T/W/End plate 4/42.5/2.3mm


WS2.5-SD

CE 800V/24A 0.2-2.5mm²

UL 600V/15A 28-12AWG

T/W/End plate 5/42.5/2.5mm


WS2.5-SD-PE

CE — 0.2-2.5mm²

UL — 28-12AWG

T/W/End plate 5/42.5/2.5mm


WS4-SD

CE 800V/32A 0.2-4mm²

UL 600V/20A 28-12AWG

T/W/End plate 6/41.8/2.5mm


WS6-SD

CE 800V/32A 0.2-6mm²

UL 600V/30A 24-10AWG

T/W/End plate 8/46.5/2.5mm


WS6-SD-PE

CE — 0.2-6mm²

UL — 24-10AWG

T/W/End plate 8/46.5/2.5mm


WS10-SD

CE 800V/57A 0.2-10mm²

UL 600V/50A 24-8AWG

T/W/End plate 10/52/2.5mm


WS10-SD-PE

CE — 0.2-10mm²

UL — 24-8AWG

T/W/End plate 10/52/2.5mm


WS16-SD

CE 800V/76A 0.2-16mm²

UL 600V/66A 24-6AWG


T/W/End plate 12/58/4mm


WS16-SD-PE

CE — 0.2-16mm²

UL — 24-6AWG

T/W/End plate 12/58/4mm


WS2.5P

CE	500V/22A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
	T/W/End plate	5/53/2.5mm


WS2.5P-PE


CE	—	0.2-2.5mm ²
UL	—	28-14AWG
	T/W/End plate	5/53/2.5mm


WFA1.5
WS1.5 series bridge -2-bit stackable Bridge

WFA2.5
WS 2.5 series bridge -2-bit stackable Bridge

WFA4
WS4 series bridge -2-bit stackable Bridge

WFA6
WS6 series bridge -2-bit stackable Bridge


WFA10
Ws10 series bridge -2-bit stackable Bridge

WFA16
Ws16 series bridge -2-bit stackable Bridge


WFB1.5
WS1.5 series jumper - Bay 1-bit jumper

WFB2.5
WS2.5 series jumper - Bay 1-bit jumper

WFB4
Ws4 series jumper - Bay 1-bit jumper

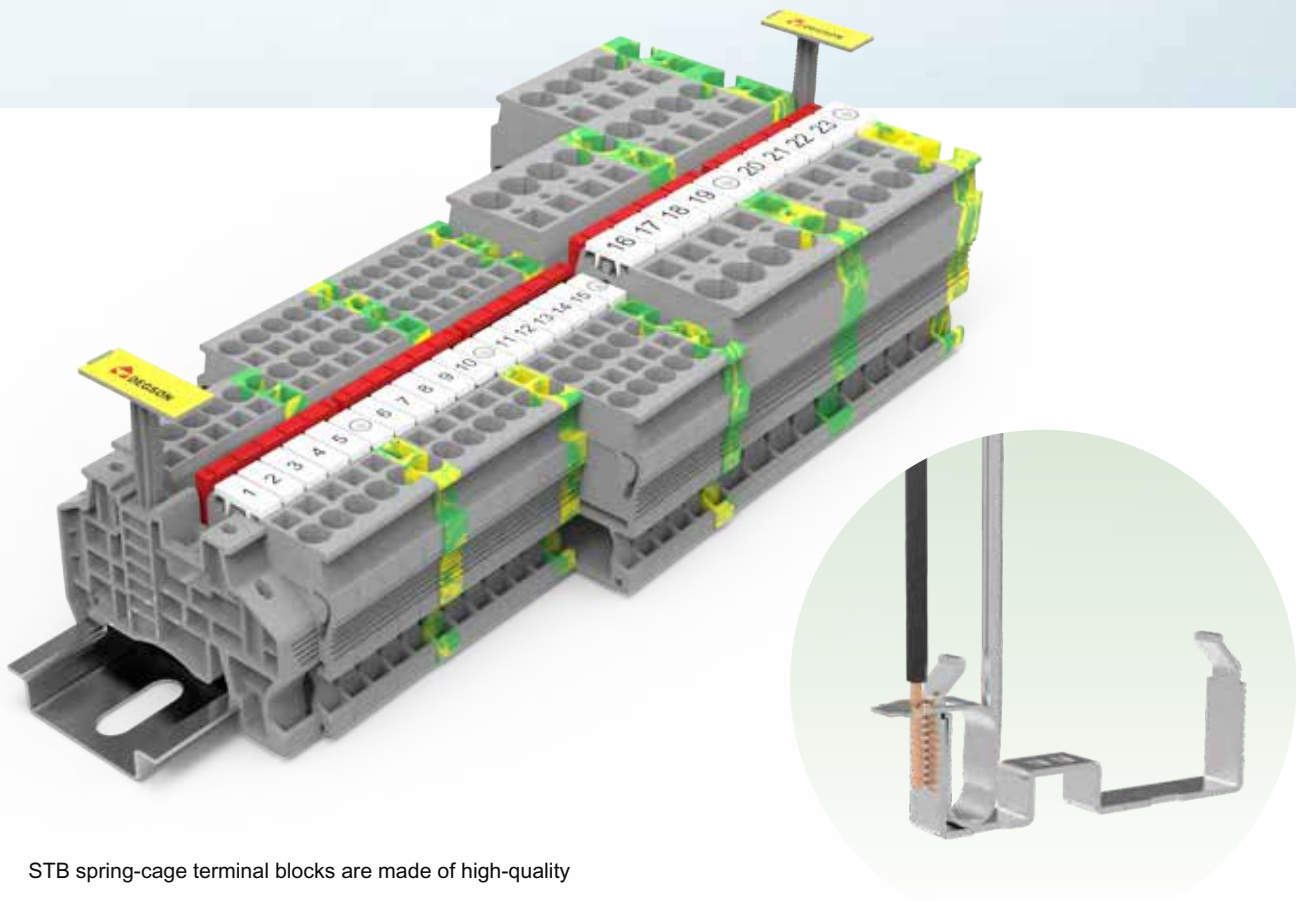
WFB6
Ws6 series jumper - Bay 1-bit jumper

WFB10
Ws10 series jumper - Bay 1-bit jumper

WFB16
Ws16 series jumper - Bay 1-bit jumper

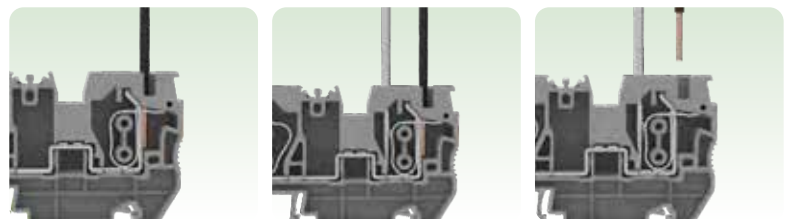
**WFC2.5-2, WFC2.5-3, WFC2.5-4
WFC2.5-5, WFC2.5-6, WFC2.5-7
WFC2.5-8**
WS2.5 series jumper - Interval 1-7 position jumper

WFE-2.5
WS2.5 series side plug bridge
-WS2.5-DIN15,WS2.5-DIN35,
-WS2.5-MID-CO,WS2.5-MID-CO,
-WS2.5-DB,WS2.5-DB-11A(H)


STB Spring-cage Terminal Blocks

- Proven spring-cage connection technology with excellent seismic performance.
- With large wiring capacity, it can be connected to rated conductors with or without ferrules.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Clear front identification and easy identification of the marked area.



STB spring-cage terminal blocks are made of high-quality alloy structure, providing reliable and durable connection products. It is possible to connect wires that have not been pretreated. The wiring capacity is large, and the wires with or without a cold pressure head of the rated wire diameter can be accessed. At the same time, the proven pull-back connection technology has excellent seismic performance and excellent performance in high vibration situations such as railways, ships, and equipment manufacturing. The plastic raw materials of PA66 UL94 VO can meet the working environment of - 40 °C to 105 °C.




STB2.5

CE 800V/24A 0.08-4mm²

UL 600V/20A 28-12AWG

T/W/End plate 5.2/50.7/1.5mm


STB2.5-PE

CE — 0.08-4mm²

UL — 28-12AWG

T/W/End plate 5.2/50.7/1.5mm


STB2.5-TW

CE 800V/24A 0.08-4mm²

UL 600V/20A 28-12AWG

T/W/End plate 5.2/62.5/1.5mm


STB2.5-TW-PE

CE — 0.08-4mm²

UL — 28-12AWG

T/W/End plate 5.2/62.5/1.5mm


STB2.5-QU

CE 800V/24A 0.08-4mm²

UL 600V/20A 28-12AWG

T/W/End plate 5.2/74.3/1.5mm


STB2.5-QU-PE

CE — 0.08-4mm²

UL — 28-12AWG

T/W/End plate 5.2/74.3/1.5mm


STB2.5-2L

CE 500V/22A 0.08-4mm²

UL 300V/20A 28-12AWG

T/W/End plate 5.2/71.9/1.5mm


STB2.5-2L-PV

CE 500V/24A 0.08-4mm²

UL 300V/20A 28-12AWG

T/W/End plate 5.2/71.9/1.5mm


STB2.5-2L-PE

CE — 0.08-4mm²

UL — 28-12AWG

T/W/End plate 5.2/71.9/1.5mm


STB6

CE 1000V/41A 0.2-10mm²

UL 600V/50A 24-10AWG

T/W/End plate 8.2/69.5/1.5mm


STB6-PE

CE — 0.2-10mm²

UL — 24-10AWG

T/W/End plate 8.2/69.5/1.5mm


STB6-TW

CE 1000V/41A 0.2-10mm²

UL 600V/50A 24-10AWG

T/W/End plate 8.2/91.6/1.5mm


STB6-TW-PE

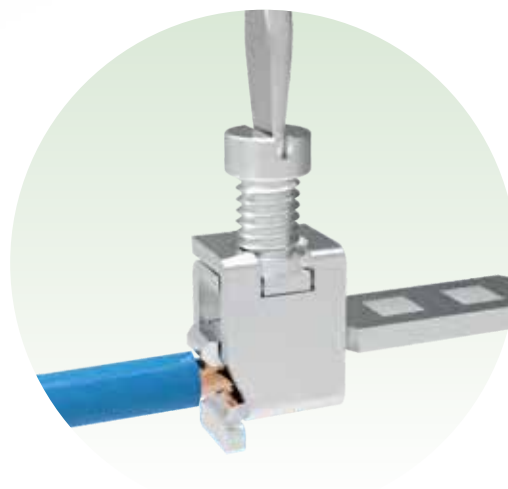
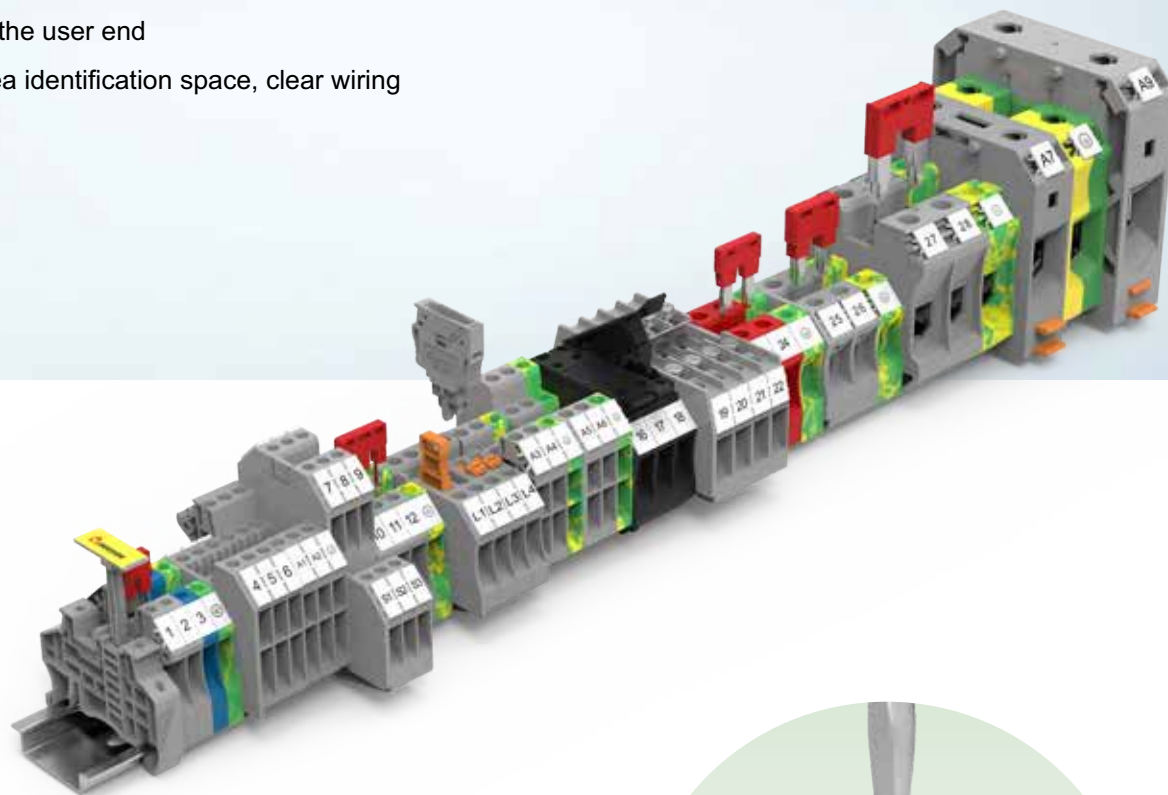
CE — 0.2-10mm²

UL — 24-10AWG

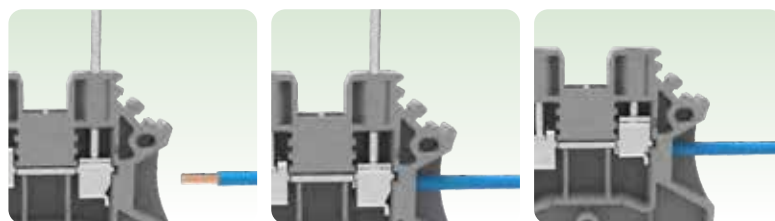
T/W/End plate 8.2/91.6/1.5mm

DC-Steel Screw Terminal Blocks

- The steel cage is used to clamp the wire, and the connection is stable and reliable
- Double channel bridge position, easy to realize potential distribution
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end
- Large area identification space, clear wiring



DC steel screw connection technology terminal block, use steel screw and steel cage to clamp wire, good torque and shock resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring the connection is reliable and safe. PA66 material plastic parts can meet the working environment of -40°C to 105°C, and all DC series of din rail products are in line with UL94 V0 flame retardant grade. Compact structure design for superior product performance.




DC2.5

CE 800V/24A 0.2-4mm²

UL 600V/25A 26-12AWG

T/W/End plate 5.1/42.3/1.5mm


DC2.5-PE

CE — 0.2-4mm²

UL — 26-12AWG

T/W/End plate 5.1/42.3/1.5mm


DC2.5-12A(H)
(Cross & Slotted screw)

CE 800V/24A 0.2-4mm²

UL 600V/25A 26-12AWG

T/W/End plate 5.1/42.3/1.5mm


DC2.5-PE-02A(H)
(Cross & Slotted screw)

CE — 0.2-4mm²

UL — 26-12AWG

T/W/End plate 5.1/42.3/1.5mm


DC2.5-TW

CE 1000V/24A 0.2-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.1/48.7/1.5mm


DC2.5-TW-PE

CE 1000V/24A 0.2-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.1/48.7/1.5mm


DC2.5-TW-02A(H)
(Cross & Slotted screw)

CE 1000V/24A 0.2-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.1/48.7/1.5mm


DC2.5-QU

CE 500V/24A 0.2-4mm²

UL 150V/20A 24-12AWG


T/W/End plate 5.1/54.4/1.5mm


DC2.5-QU-PE

CE — 0.2-4mm²

UL — 24-12AWG


T/W/End plate 5.1/54.4/1.5mm


DCKKB2.5

CE 500V/24A 0.5-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.1/76/1.5mm


DCKKB2.5-PV

CE 500V/24A 0.5-4mm²

UL 300V/20A 26-12AWG


T/W/End plate 5.1/76/1.5mm


DCKKB2.5-PE

CE — 0.5-4mm²

UL — 26-12AWG

T/W/End plate 5.1/76/1.5mm


DCKKB2.5-02A(H)
(Cross & Slotted screw)

CE 500V/24A 0.5-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.1/76/1.5mm


DCKKB2.5-PV-02A(H)
(Cross & Slotted screw)

CE 500V/24A 0.5-4mm²

UL 300V/20A 26-12AWG

T/W/End plate 5.1/76/1.5mm


DCKKB2.5-PE-02A(H)
(Cross & Slotted screw)

CE — 0.5-4mm²

UL — 26-12AWG

T/W/End plate 5.1/76/1.5mm


DC4

CE 1000V/32A 0.2-6mm²

UL 600V/30A 22-10AWG

T/W/End plate 6.1/42.3/1.5mm


DC4-PE

CE — 0.2-6mm²

UL — 22-10AWG

T/W/End plate 6.1/42.3/1.5mm


DC4-12A(H)
(Cross & Slotted screw)

CE 1000V/32A 0.5-4mm²

UL 600V/30A 22-10AWG

T/W/End plate 6.1/42.3/1.5mm


DC4-PE-02A(H)
(Cross & Slotted screw)

CE — 0.5-4mm²

UL — 22-10AWG

T/W/End plate 6.1/42.3/1.5mm


DC4-TW

CE 500V/32A 0.5-6mm²

UL 300V/20A 20-12AWG

T/W/End plate 6.1/50.9/1.5mm


DC4-TW-PE

CE — 0.5-6mm²

UL — 20-12AWG

T/W/End plate 6.1/50.9/1.5mm


DC4-QU
(Cross & Slotted screw)

CE 500V/32A 0.5-4mm²

UL 300V/30A 22-10AWG

T/W/End plate 6.1/54.4/1.5mm


DC4-QU-PE
(Cross & Slotted screw)

CE — 0.5-4mm²

UL — 22-10AWG

T/W/End plate 6.1/54.46/1.5mm


DCKKB4

CE 800V/32A 0.5-4mm²

UL 300V/30A 22-10AWG

T/W/End plate 6.1/76/1.5mm


DCKKB4-PV


CE 800V/32A 0.5-4mm²

UL 300V/30A 22-10AWG


T/W/End plate 6.1/76/1.5mm


DCKKB4-PE

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-01P-11-02A(H)

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-PV-02A(H)
(Cross & Slotted screw)

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DC6

CE	1000V/41A	0.5-6mm ²
UL	600V/50A	22-8AWG
T/W/End plate 8.0/45/1.5mm		


DC6-PE


CE	—	0.5-6mm ²
UL	—	22-8AWG
T/W/End plate 8.0/45/1.5mm		


DC10


CE	1000V/57A	0.5-10mm ²
UL	600V/65A	22-6AWG
T/W/End plate 10/45/1.5mm		


DC10-PE

CE	—	0.5-10mm ²
UL	—	22-6AWG
T/W/End plate 10/45/1.5mm		


DC10-300A(H)
(Cross & Slotted screw)

CE	800V/57A	0.5-10mm ²
UL	600V/30A	20-6AWG
T/W/End plate 10/45/1.5mm		


DC10-TW

CE	1000V/57A	1.5-16mm ²
UL	600V/65A	16-6AWG
T/W/End plate 10.2/58.7/1.5mm		


DC10-TW-PE

CE	—	1.5-16mm ²
UL	—	16-6AWG
T/W/End plate 10/58.7/1.5mm		


DCKKB10

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		


DCKKB10-PV

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		


DCKKB10-PE

CE	—	0.5-10mm ²
UL	—	20-6AWG
T/W/End plate 10/83.9/1.5mm		


DC16

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate 12/49/1.5mm		


DC16-PE

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate 12/49/1.5mm		


DC35

CE	1000V/125A	1.5-50mm ²
UL	600V/150A	14-1/0AWG
T/W/End plate 16/55.4/-mm		


DC35-PE

CE	—	1.5-50mm ²
UL	—	14-1/0AWG
T/W/End plate 16/55.4/-mm		


DC50

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45/-mm		


DC50-PE

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45/-mm		


DC50-01A(H)
(Hex socket screws)

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45/-mm		


DC50-PE-01A(H)
(Hex socket screws)

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45/-mm		


DC95

CE	1000V/232A	25-95mm ²
UL	600V/230A	2-4/0AWG
T/W/End plate 25/83/-mm		


DC95-PE

CE	—	25-95mm ²
UL	—	2-4/0AWG
T/W/End plate 25/83/-mm		


DC4-HE

CE	500V/6.3A	0.5-6mm ²
UL	600V/6.3A	20-10AWG
T/W/End plate 8/58/1.5mm		


DC4-HE-LD24

CE	24V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	


DC4-HE-LD60


CE	60V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	


DC4-HE-LD250


CE	250V/6.3A	0.5-6mm ²
UL	—	20-10AWG
T/W/End plate	8/58/1.5mm	


DC4-MT

CE	500V/20A	0.5-6mm ²
UL	600V/16A	26-10AWG
T/W/End plate	6.1/56.8/1.5mm	


DC4-TG


CE	500V/20A	0.5-6mm ²
UL	600V/16A	26-10AWG
T/W/End plate	6.1/56.8/1.5mm	


DCTK 6-20A(H)

CE	630V/41A	0.5-6mm ²
UL	300V/45A	22-8AWG
T/W/End plate	8/69/1.5mm	


DCTK6 N

CE	630V/41A	0.5-6mm ²
UL	300V/45A	22-8AWG
T/W/End plate	8/69/1.5mm	


DC2.5-CU

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate	5.1/42.3/1.5mm	


DC2.5-PE-CU

CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate	5.1/42.3/1.5mm	


DC4-CU

CE	1000V/32A	0.5-4mm ²
UL	600V/30A	22-10AWG
T/W/End plate	6.1/42.3/1.5mm	


DC4-CU-PE

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate	6.1/42.3/1.5mm	


DC6-CU

CE	1000V/41A	0.5-6mm ²
UL	600V/50A	22-8AWG
T/W/End plate	8/44.95/1.5mm	


DC6-PE-CU

CE	—	0.5-6mm ²
UL	—	22-8AWG
T/W/End plate	8/44.95/1.5mm	


DC16-CU-200A(H)

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate	12/49/1.5mm	


DC16-PE-CU-200A(H)

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate	12/49/1.5mm	


DFAXX5.2

POLE : 2-10P,20P


DFAXX6.2

POLE : 2-10P


DFAXX8.2

POLE : 2-10P


DFAXX10.2

POLE : 2-10P


DFAXX12.2

POLE : 2-3P


DFA35

POLE : 2-3P


EBCXX-8

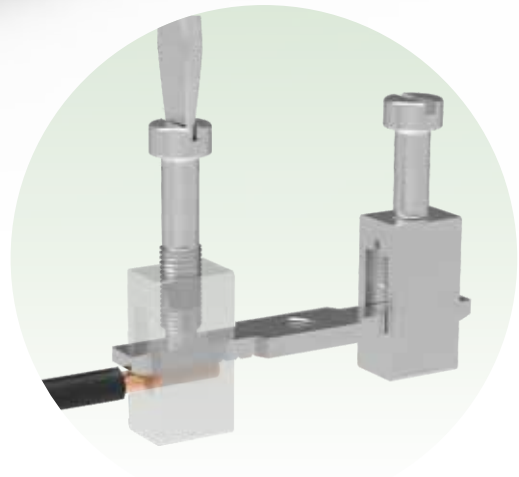
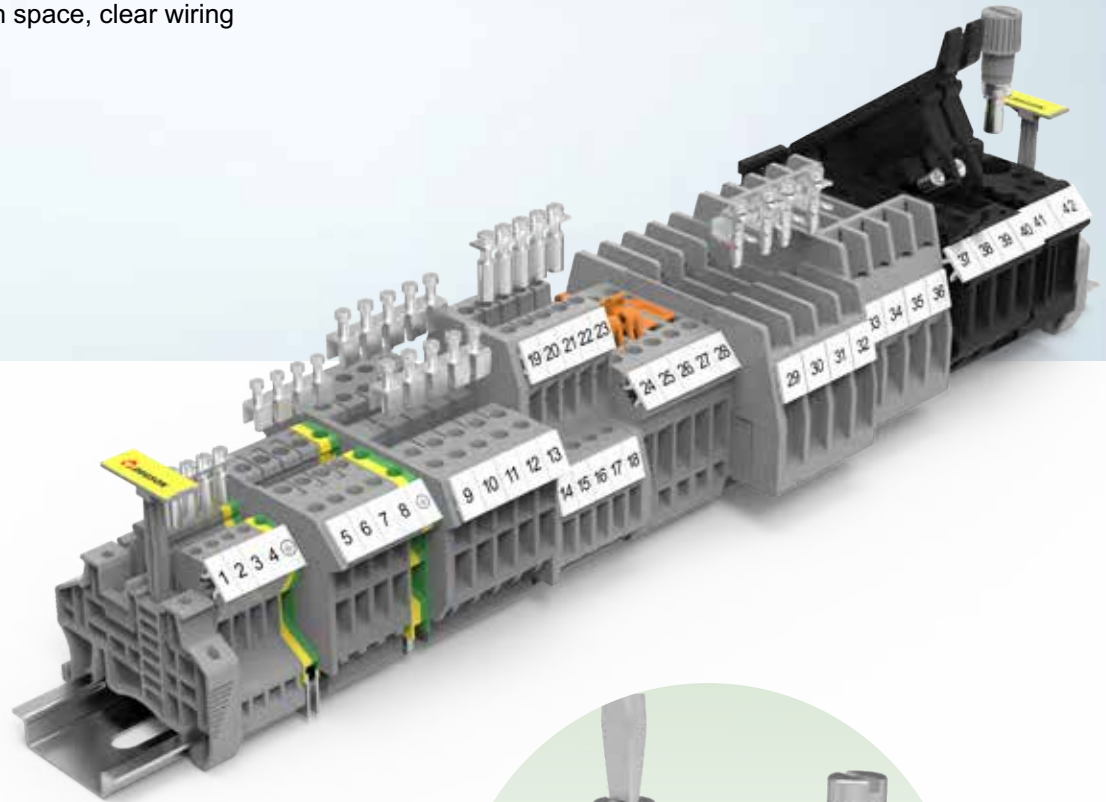
EBCXX-8 - DC4-HE Series

XX: NO. OF POLE

2,3,10POLES

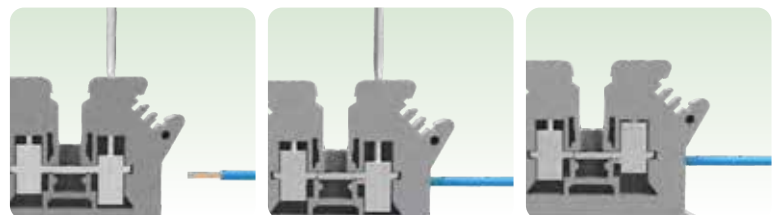
PC-Copper Screw Terminal Blocks

- Screw connection technology is adopted, with excellent connection airtightness
- All copper alloy material, low contact resistance
- The wiring is very flexible and can realize multi wire connection
- Large area identification space, clear wiring



PC brass screw connection terminal blocks (brass screw and brass block with clamping wire) have good corrosion resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40 °C to 105°C, and all PC series of din rail products are in line with UL94 V0 flame retardant grade.

Traditional screw terminal blocks: full product line provide different solutions for various industries.





PC1.5

CE	500V/17.5A	0.2-4mm ²
UL	600V/10A	26-16AWG
T/W/End plate 4.2/42.5/1.5mm		


PC2.5

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		


PC2.5-PE


CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		


PC2.5B

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 6.2/42.5/1.5mm		


PC2.5-TW


CE	400V/24A	0.2-2.5mm ²
UL	300V/20A	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		


PC2.5-TW-PE

CE	—	0.2-2.5mm ²
UL	—	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		


PCDK2.5


CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		


PCDK2.5-PE

CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		


PCKK2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		


PCKK2.5-PV

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		


PC4


CE	800V/32A	0.2-4mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		


PC4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		


PC4-TW


CE	500V/32A	0.2-4mm ²
UL	300V/30A	24-12AWG
T/W/End plate 6.2/50.1/2mm		


PC4-TW-PE

CE	—	0.2-4mm ²
UL	—	24-12AWG
T/W/End plate 6.2/50.1/2mm		


PCDK4


CE	630V/32A	0.2-4mm ²
UL	300V/30A	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		


PCDK4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		


PCKK4

CE	500V/32A	0.2-4mm ²
UL	300V/30A	26-10AWG
T/W/End plate 6.2/56/2.5mm		


PCKK4-PE

CE	—	0.2-4mm ²
UL	—	26-10AWG
T/W/End plate 6.2/56/2.5mm		


PC6

CE	800V/41A	0.2-6mm ²
UL	600V/50A	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		


PC6-PE

CE	—	0.2-6mm ²
UL	—	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		


PC10

CE	800V/57A	0.2-10mm ²
UL	600V/65A	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		


PC10-PE


CE	—	0.2-10mm ²
UL	—	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		


PC16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		


PCIK16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		


PC16-PE

CE	—	0.2-16mm ²
UL	—	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		


PC35
CE 1000V/125A 0.2-35mm²
UL 600V/150A 18-1/0AWG

T/W/End plate 15.2/50mm


PCIK35
CE 800V/125A 0.2-35mm²
UL 600V/85A 12-2AWG

T/W/End plate 15.2/55mm


PC35-PE
CE — 0.2-35mm²
UL — 18-1/0AWG

T/W/End plate 15.2/50mm


PC50
CE 1000V/150A 16-50mm²
UL 600V/125A 6-1/0AWG

T/W/End plate 20/70.45mm


PC50-PE
CE — 16-50mm²
UL — 6-1/0AWG

T/W/End plate 20/70.45mm


PC50-01A(H) (Allen screws)

CE 1000V/150A 16-50mm²
UL 600V/125A 6-1/0AWG

T/W/End plate 20/70.45mm


PC50-PE-01A(H) (Allen screws)

CE — 16-50mm²
UL — 6-1/0AWG

T/W/End plate 20/70.45mm


PC95
CE 1000V/232A 25-95mm²
UL 600V/230A 2-4/0AWG

T/W/End plate 25/83mm


PC95-PE
CE — 25-95mm²
UL — 2-4/0AWG

T/W/End plate 25/83mm


PCMB2.5
CE 500V/24A 0.2-2.5mm²
UL 300V/20A 28-12AWG

T/W/End plate 5.2/28/1.0mm


PCMB4
CE 500V/32A 0.2-4mm²
UL 300V/30A 26-10AWG

T/W/End plate 6.2/28/1.0mm


PC4-HE
CE 800V/6.3A 0.2-4mm²
UL 600V/6.3A 26-10AWG

T/W/End plate 8.2/72.89mm


PC10-DR
CE 800V/10A 0.5-10mm²
UL 600V/10A 24-6AWG

T/W/End plate 12/57.8mm


PCMT2.5
CE 500V/16A 0.2-2.5mm²
UL 300V/10A 24-14AWG

T/W/End plate 5.2/46.25/1.0mm


PCMT4
CE 800V/16A 0.2-4mm²
UL 600V/15A 24-12AWG


T/W/End plate 6.2/51mm






PCTK6
CE 400V/41A 0.5-6mm²
UL 300V/40A 26-10AWG

T/W/End plate 8.2/72/2.0mm


PCTK6-BEN
CE 500V/41A 0.5-6mm²
UL 300V/40A 26-10AWG

T/W/End plate 8.2/61/2.2mm


FBI6-RTK/S

FBRI 10-4



FBRI 10-5

FBI 10-6

FBI 10-8

FBI 10-10

FBI 10-12



FBI 3-15


FBI 2-16

**FB2-RTK/S
FB3-RTK/S
FB5-RTK/S
FB10-RTK/S**

**SB2-RTK/S
SB4-RTK/S**

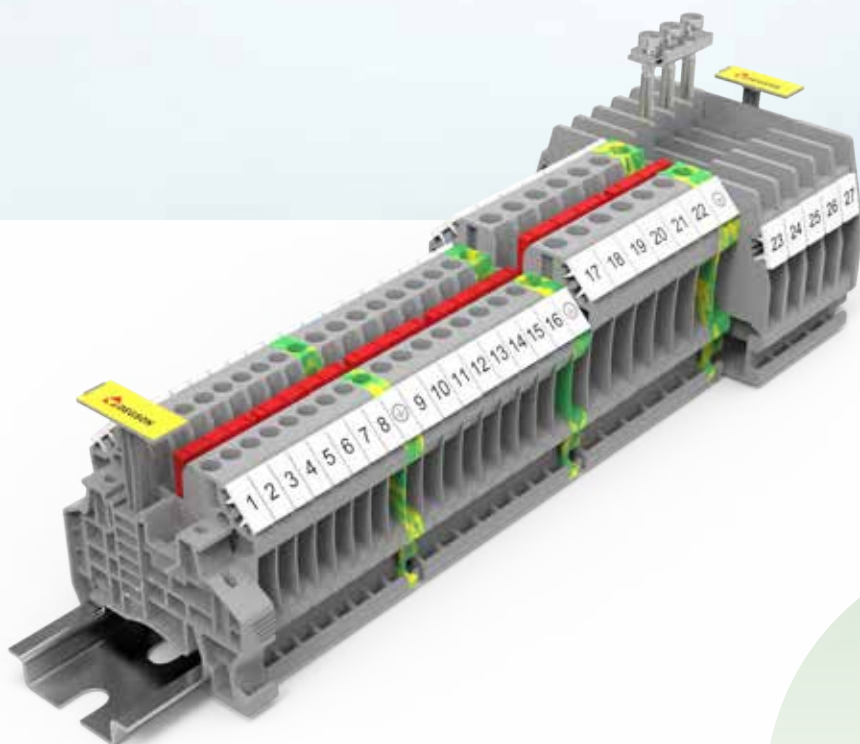
EB 10-5.2

EB 10-6.2

EB 10-8.2

EB 10-10

EB 10-12

EB 10-15

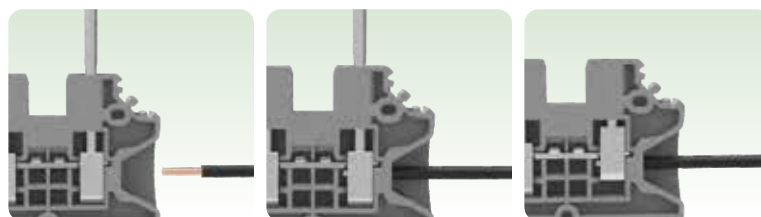
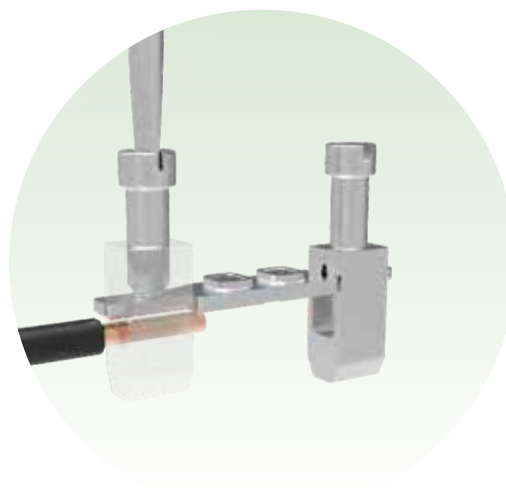
EBA40-6.2

EBA40-8


DHV High-voltage Screw Terminal Blocks

- Adopt screw self-locking technology, with excellent anti loosening performance.
- Rated voltage up to kilovolts, especially suitable for medium and high voltage applications in the power industry.
- Copper alloy material, low resistivity, excellent electrical conductivity.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Large area identification at 45 °, marking areas easy to identify.



DHV high-voltage screw terminal blocks, using screw self-locking technology, have excellent wiring anti loosening performance. The copper screw and copper clamp body cooperate with each other to ensure the air tightness of long-term connections. High precision copper alloy conductive body minimizes temperature rise, ensuring reliable and safe connection. The plastic raw materials of PA66 can meet the working environment of - 40 °C to 105 °C, and all PC series products meet the UL94 V0 flame retardant grade. The rated voltage of the through type terminals is up to kilovolts, Especially suitable for medium and high voltage applications in the power industry.





DHV2.5

CE 1000V/24A 0.14-4mm²

UL 600V/20A 26-12AWG

T/W/End plate 5.2/47.5/1.5mm



DHV2.5-PE

CE — 0.14-4mm²

UL — 26-12AWG

T/W/End plate 5.2/47.5/1.5mm



DHV4

CE 1000V/32A 0.14-6mm²

UL 600V/30A 26-10AWG

T/W/End plate 6.2/47.5/1.5mm




DHV4-PE

CE — 0.14-6mm²

UL — 26-10AWG

T/W/End plate 6.2/47.5/1.5mm



DHV6

CE 1000V/41A 0.2-10mm²

UL 600V/50A 24-8AWG

T/W/End plate 8.2/47.5/1.5mm



DHV6-PE

CE — 0.12-10mm²

UL — 24-8AWG

T/W/End plate 8.2/47.5/1.5mm



DHV4-2L-MT

CE 500V/30A 0.14-6mm²

UL 300V/20A 26-10AWG

T/W/End plate 6.2/100.5/1.5mm



DHV4-2L-TG

CE 500V/30A 0.14-6mm²

UL 300V/20A 26-10AWG

T/W/End plate 6.2/100.5/1.5mm




DHV4-2L-HE

CE 500V/6.3A 0.14-6mm²

UL 300V/6.3A 26-10AWG

T/W/End plate 6.2/100.5/1.5mm



DHV4-2L-HE-LD24

CE 24V/6.3A 0.14-6mm²

UL — 26-10AWG

T/W/End plate 6.2/100.5/1.5mm



DHV4-2L-HE-LD60

CE 60V/6.3A 0.14-6mm²

UL — 26-10AWG

T/W/End plate 6.2/100.5/1.5mm



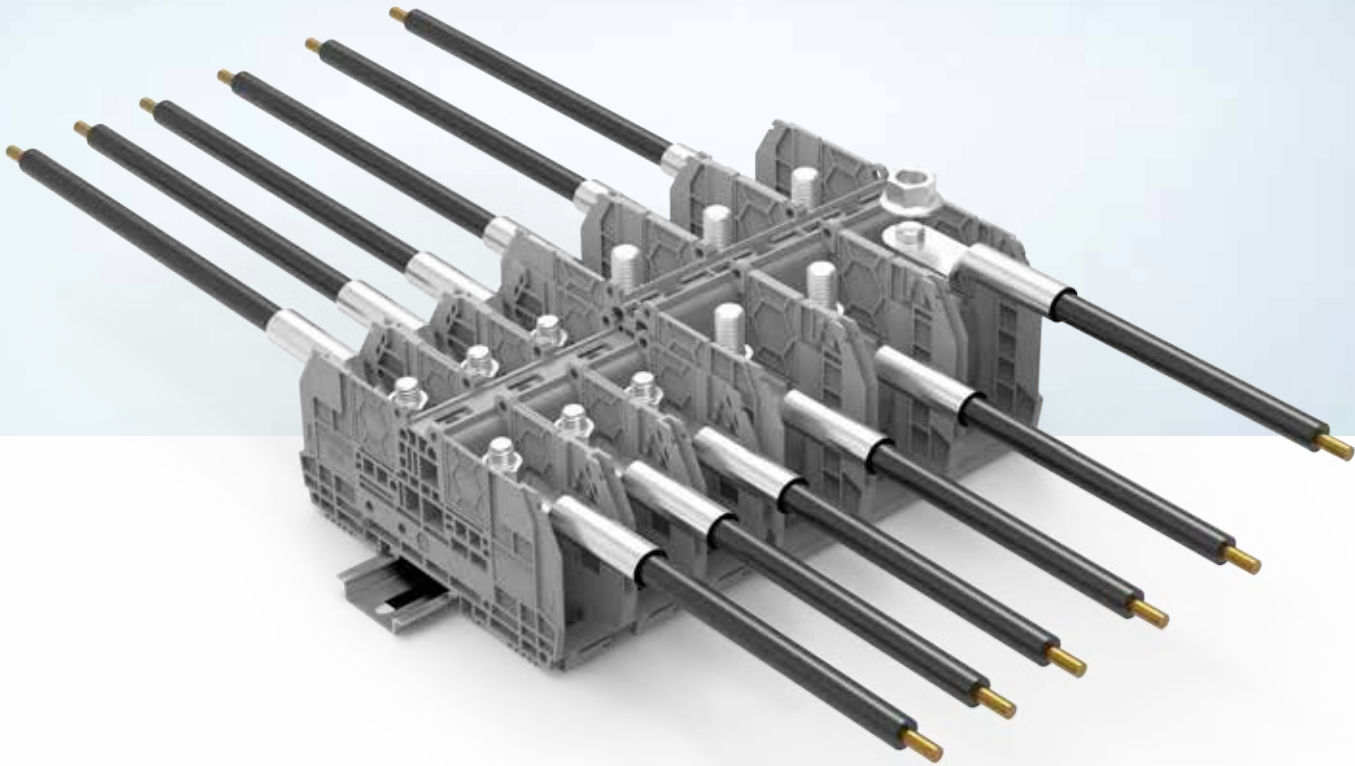
DHV4-2L-HE-LD250

CE 250V/6.3A 0.14-6mm²

UL — 26-10AWG

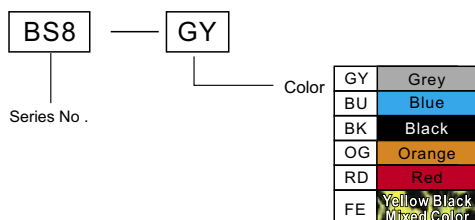
T/W/End plate 6.2/100.5/1.5mm

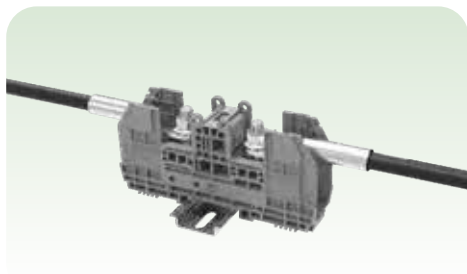
BS Bolt Connection Terminal Blocks



- BS Bolt connection terminal blocks, with bolt connection technology, secure connection.
- Multiple cable ends can be connected with a single screw, which can be used for power feed.
- Closed structure design at both ends, with protective cover, safe and anti-touch.
- Compatible with the marking system to clearly identify the working area.
- Equipped with test hole in the middle, easy to test the circuit.

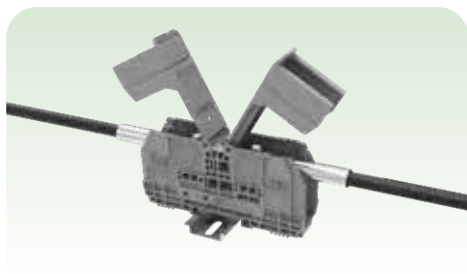
HOW TO ORDER BS SERIES





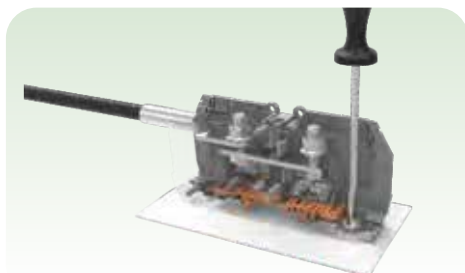
Bolt connection

- BS Series products include BS8, BS10 bolt connection terminal blocks, can connect wires with diameters from 2.5mm² to 150mm².




Removable cover

- Closed structure design at both ends, with protective cover, safe and anti-touch.



Flexible installation

- Variety installation methods, available for panel & Rail mounted.



BS6

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate 27/155/-mm		




BS6 N

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate 27/107/-mm		



BS8

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate 29/184/-mm		



BS8 N

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate 29/136/-mm		



BS10

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate 41/235/-mm		



BS10 N

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate 41/144/-mm		

Marking System

Degson marking system, providing a complete solution for industrial site identification case. Our thermal transfer printers and laser printers provide customers with Terminal blocks marker, Cable marker, Device marker Printing Service.



Model	PM-00A
Order No	9902000001

Vario Writing Machine

- Flexible drawing function to realize automatic calibration of various logo printing requirements.
- To achieve better marking effect, large-scale marking area, batch printing.



Model	PTT
Order No	99020000073

Thermal Transfer Printer

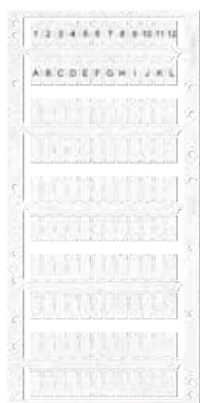
- Support plate printing, marking the terminals is applicable to ZS and ZSF standard marker.
- Thermal transfer printing technology, quickly realize batch printing.



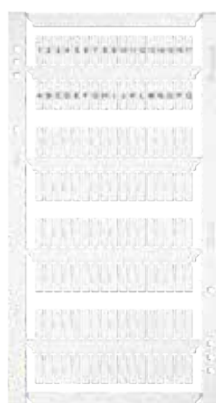
Model	SLP
Order No	99020000099

Laser Printer

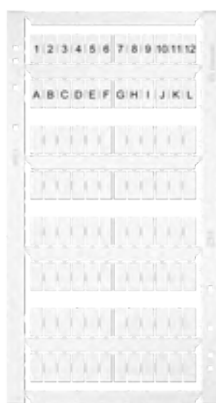
- Powerful and convenient to operate
- Class 1 laser, safety protection



Model	Order No
ZC5	92118901439



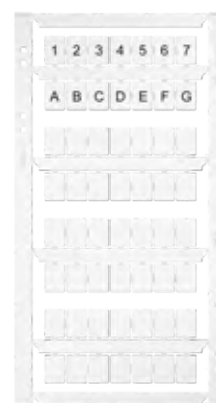
Model	Order No
ZS3.5	11060000590



Model	Order No
ZS5	11060000591



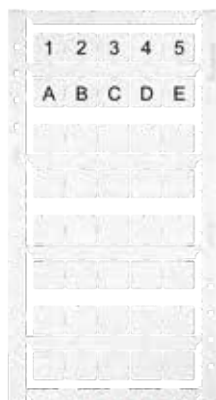
Model	Order No
ZS6	11060000592



Model	Order No
ZS8	11060000593



Model	Order No
ZS10	11060000594



Model	Order No
ZS12	11060000595



Model	Order No
ZSF3.5	11060000596



Model	Order No
ZSF5	11060000597



Model	Order No
ZSF6	11060000598



Model	Order No
ZSF8	11060000599



Model	Order No
ZSF10	11060000600



Model	Order No
ZSF12	11060000601



Model	Order No
ZB3.5	92118900094
ZB4	92118900109
ZB5	92118900129
ZB6	92118900430
ZB8	92118900578
ZB10	92118900024



Model	Order No
ZK5	92118901170
ZK6	92118901207



Model	Order No
ZT12	92118901290



Model	Order No
WB4	92118900841
WB5	92118900002



Model	Order No
DEK4	92118900750
DEK5	92118900753
DEK6	92118900791



Model	Order No
ZW5	92118900703



Model	Order No
DTH3.5-25x3.5	10060000570
DTH3.5-25x12	10060000567



Model	Order No
DTH5-25x5	10060000569
DTH5-25x12	10060000568



Model	Order No
DMTH5-2	11060000588



Model	Order No
DMTH5-3	11060000589



Model	Order No
KLM3-20x8	10060000573



Model	Order No
KLM3-44x8	10060000574



Model	Order No
EM	11060000739



Model	Order No
DBE-1	11060000210



Model	Order No
DBE-2	11060000286



Model	Order No
DLM2	11060000214



Model	Order No
EEA1.5	92118901391
EEA2.5	11060000064
EEA4	11060000065
EEA6	11060000066
EEA10	92118901059
EEA16	92118901060



Model	Order No
DML(25x12)-WH	99050000008
DML(25x12)-YE	99050000009



Model	Order No
DML(20x8)-WH	99050000002
DML(44x7)-WH	99050000010
DML(25x5)-WH	99050000020
DML(25x12)-WH	99050000011
DML(41x13)-WH	99050000008
DML(37x7)-WH	99050000009
DML(20x12)-WH	99050000006
DML(18x11)-WH	99050000007
DML(20x8)-YE	99050000012
DML(44x7)-YE	99050000013
DML(25x5)-YE	99050000014
DML(25x12)-YE	99050000015
DML(41x13)-YE	99050000016
DML(37x7)-YE	99050000017
DML(20x12)-YE	99050000018
DML(18x11)-YE	99050000019



Model	Order No
NS15	92113900003



Model	Order No
NS35-7.5	92113900022
NS35-7.5-AL	92113900037



Model	Order No
NS35/7.5-AL	92113900037



E-Series Ferrule	
See catalog for details	



TE-Series Ferrule	
See catalog for details	



Model	Order No
E-PC-1100A(H)	11060000074



Model	Order No
E-PC-1100A(H)	11060000666



Model	Order No
E-PC	11060000073



Model	Order No
E-WS	11060000127



Model	Order No
E-WS N	11060000669



Model	Order No
E-WS-5	11060000422



Model	Order No
DLS-CU3/10	92118900917



Model	Order No
AB/SS	/



Model	Order No
AB-SKC	11060000737



Model	Order No
SKC8	11060000746
SKC14	11060000747



Model	Order No
ATP-DS	11041000387



Model	Order No
ATP-PC N	94200019534



Model	Order No
AP3-T	11060000843



Model	Order No
AP3-T-KS	11060000860




Model	Order No
AP3-COVER-1000	11060000887



Model	Order No
NS35/7.5-CAP	11060000470



Model	Order No
NS35/15-CAP	11060000471



Model	Order No
UNICUT-TOP	99030000004



Model	Order No
UNIWSP	99030000007



Model	Order No
UNIKNF	99030000012



Model	Order No
UNIWCP	99030000010



Model	Order No
UNIWCP	99030000005



Model	Order No
UNICDS	99030000011

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requirements for products and regards it as the responsibility.

Thus, we have made the following environment strategic policy:

1. To meet customers' demands and obey the national and local laws and regulations as well as other environmental protection requirements.
2. Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.
3. Fully considering the factors which will influence the environment in the processes of product development, manufacturing, material usage and waste processing, establish management system of waste in order to improve the environment of our company.
4. To increase the employees' consciousness of environmental protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.
5. To make full use of resources and to decrease consumption of material in order to save energy.
6. To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.
7. To strive for making conservation-oriented and environment-friendly products through continuous innovation and developing new materials and technology.



