

REGULATED DC POWER SUPPLIES.

PRODUCT CATALOG 2013-2014

88.1



DELTAELEKTRONIKA
DC POWER SUPPLIES

PRODUCT CATALOG

2013-2014

DELTA ELEKTRONIKA

Table of contents:


SM-series	
• SM6000-Series	2
• SM3300-Series	4
• SM3000-Series	6
• SM1500-Series	8
• SM800-Series	10
 ES-series	
• ES300-Series	12
• ES150-Series	13
• EST150-Series	15
 Rack units	
• 1200S-Series	16
• S280-Series	17
• 240S-Series	18
• SX-Series	19
• U-Series	20
 Interfaces	
• SM3300 interfaces	21
• PSC-Series	22
• ANALOG-Series	24

SM6000 Series

6000 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM6000 Series



Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fan is temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- 19" rack mounting or for laboratory use (feet included)
- Remote sensing
- Interlock

Typical Applications

- Solar Inverter testing, PV-simulation
- Plasma chambers
- Hybrid car test systems
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power
The conservatively rated unit allows to deliver extra output power with the same reliability.
At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming
A 10 to 20 times higher programming speed (down to 0.4 ms rise time at full load) and lower output capacitance.
Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink
Two quadrant operation maintains the output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer
Arbitrary Waveform generator or stand-alone automation.
The sequencer is integrated in the Ethernet controller.



High Voltage Isolation
A higher output isolation allows series operation up to 1200 V.



High Input Voltage
Higher input voltages possible for operation at line voltages of 440 V AC and 480 V AC (for USA).

More information about this:
Page 22



Software Control and Interfaces
Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog

Details about interfaces:
Page 22-24





Digital Voltage and Current Setting
Reliable, longlife digital encoders can be implemented at the front panel. Includes total front panel lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Secured Voltage and Current Setting
For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Dimensions and Weight

Width = 19" Weight = 27 kg
Height = 4 U



Specifications

- Three phase input : 380 / 400 / 415 V AC, optional 440 / 480 V AC V_{nom.} line to line (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.98 (at 100% load)
- Efficiency : up to 90% (at full load)
- Output ripple and spikes : from 0.8 mV_{rms} / 8 mV_{pp}
- Regulation : from 2.5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 3.3 ms (10-90%), optional from 0.4 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 5.10⁻⁵ / 10.10⁻⁵
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20
- cTÜVus

SM3300 Series

3300 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM3300 Series

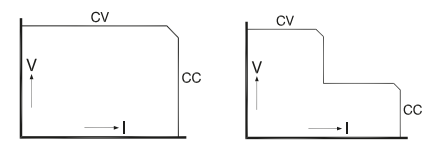

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fan is temperature controlled

Functionalities

- Operation on single and three phase input voltages
- Standard Ethernet interface, incl. sequencer
- Large user display, menu driven operation
- Durable digital encoders for voltage and current adjustment
- Max. 4 plug and play optional interfaces
- USB input for exchange of settings and wave forms

Typical Applications


- Solar Inverter testing, PV-simulation
- Car test systems
- ATE in industrial production lines
- Plasma chambers
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Standard Features



Digital Voltage and Current Setting
Reliable, longlife digital encoders are implemented at the front panel.

Includes total front panel lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.




Ethernet Controller
A 16 bit Ethernet interface for programming and monitoring.



Sequencer
Arbitrary Waveform generator or stand-alone automation.



High Voltage Isolation
A higher output isolation allows series operation up to 1320 V.



USB-Input
Front panel USB-input for exchange of settings and waveforms (host).

Available Options



Software Control and Interfaces
Field installable interfaces:

- Isolated Analog Programming
- Serial: RS232, RS485, RS422, USB (host)
- Digital I / O
- Master / Slave
- Isolated contacts
- PROFIBUS
- CANBUS

Note: standard no analog interface.
Details about SM3300 interfaces: page 21



High Speed Programming
A 10 to 20 times higher programming speed (down to 0.2 ms rise time at full load)

and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.





Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.

Dimensions and Weight

Width = 19" Weight = 15 kg
Height = 2 U

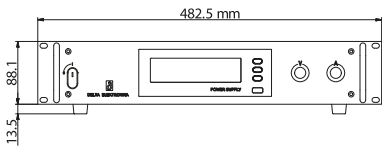

Specifications

- Single and three phase input : 180-528 V AC (single or three phase 48-62 Hz) derating at low input voltage
- Active Power Factor Correction (PFC) : up to 0.99 (at 100 % load)
- Efficiency : up to 92% (at full load)
- Output ripple and spikes : from 3 mV_{rms} / 12 mV_{pp}
- Regulation : from 2.5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 1.6 ms (10-90%), optional from 0.2 ms
- Output voltage and current stability : from 6.10⁻⁵ / 9.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20
- cTUVus

SM3000 Series

3000 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM3000 Series



Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fan is temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed , space between units is not required
- 19" rack mounting or for laboratory use (feet included)
- High power system configuration from multiple units
- Remote sensing

Typical Applications

- Solar Inverter testing, PV-simulation
- Plasma chambers
- Car test systems
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.33 ms rise time at full load)

and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is

positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer

Arbitrary Waveform generator or stand-alone automation.

The sequencer is integrated in the Ethernet controller.



High Voltage Isolation

A higher output isolation allows series operation up to 1000 V.

More information about this:
Page 22



Software Control and Interfaces

Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog

Details about interfaces:
Page 22-24




Secured Voltage and Current Setting

For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Units	Voltage range	Current range
SM 15 - 200 D	0 - 15 V	0 - 200 A
SM 30 - 100 D	0 - 30 V	0 - 100 A
SM 45 - 70 D	0 - 45 V	0 - 70 A
SM 70 - 45 D	0 - 70 V	0 - 45 A
SM 120 - 25 D	0 - 120 V	0 - 25 A
SM 300 - 10 D	0 - 300 V	0 - 10 A

Dimensions and Weight

Width = 19" Weight = 15 kg
Height = 3 U

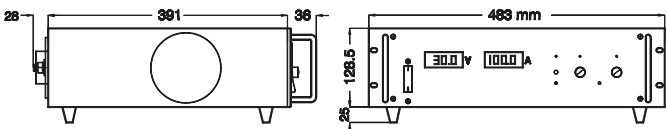

Specifications

- Three phase input : 380 / 400 / 415 V AC, V_{nom} , line to line (48-62 Hz)
- Efficiency : up to 90% (at full load)
- Output ripple and spikes : from 1.6 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : from 100 μ s (50-100% load step)
- Programming speed : 7 ms (10-90%), optional from 0.33 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : $4 \cdot 10^{-5}$ / $10 \cdot 10^{-5}$
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

SM1500 Series

1500 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM1500 Series

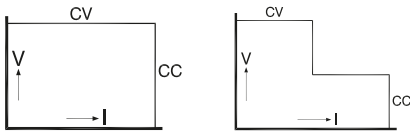

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fan is temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- 19" rack mounting or for laboratory use (feet included)
- High power system configuration from multiple units
- Remote sensing
- Interlock

Typical Applications

- Solar Inverter testing, PV-simulation
- Semiconductor burn-in & processing
- Car test systems
- ATE in industrial production lines
- Lasers
- Controlled battery (dis)charging
- Component device testing
- Driving PWM-controlled DC-motors
- Accurate current sources
- Aerospace and military equipment

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2 ms rise time at full load)

and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is

positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer

Arbitrary Waveform generator or stand-alone automation.

The sequencer is integrated in the Ethernet controller.



High Voltage Isolation

A higher output isolation allows series operation up to 1000 V.



Secured Voltage and Current Setting

For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected

with a plastic cap from accidental adjusting.

More information about this:
Page 22



Software Control and Interfaces

Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog

Details about interfaces:
Page 22-24



Digital Voltage and Current Setting


Reliable, longlife digital encoders can be implemented at the front panel.

Includes total front panel lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.

Units	Voltage range	Current range
SM 15 - 100	0 - 15 V	0 - 100 A
SM 35 - 45	0 - 35 V	0 - 45 A
SM 52 - 30	0 - 52 V	0 - 30 A
SM 52 - AR - 60	0 - 26 V	0 - 60 A
Autoranging output	0 - 52 V	0 - 30 A
SM 70 - 22	0 - 70 V	0 - 22 A
SM 120 - 13	0 - 120 V	0 - 13 A
SM 300 - 5	0 - 300 V	0 - 5 A
SM 400 - AR - 8	0 - 200 V	0 - 8 A
Autoranging output	0 - 400 V	0 - 4 A

Dimensions and Weight

Width = 19" Weight = 9,9 kg
Height = 2 U

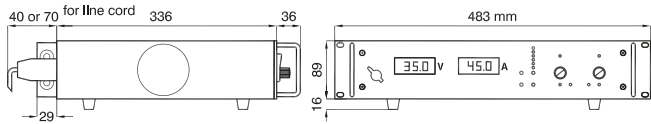

Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 (at 100 % load)
- Efficiency : up to 91% (at full load)
- Output ripple and spikes : from 1.8 mV_{rms} / 8 mV_{pp}
- Regulation : from 0.5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 3.4 ms (10-90%), optional from 0.2 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 6.10⁻⁵ / 9.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards


- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20
- cTUVus

SM800 Series

800 W DC POWER SUPPLIES

APPLICATIONS & OPTIONS

SM800 Series

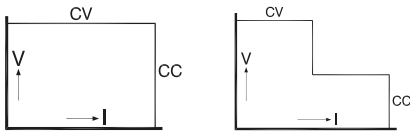

Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: fan is temperature controlled

Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- Laboratory use (feet included), 19" rack mounting optional
- Remote sensing
- Interlock

Typical Applications

- Accurate current sources
- Electronic circuit development
- Component device testing
- ATE in industrial production lines
- Automotive battery simulation
- Controlled battery (dis)charging
- Lasers
- Driving PWM-controlled DC-motors
- Medical research equipment
- Aerospace and military equipment

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2 ms rise time at full load)

and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.



Two-Quadrant Output: Power Sink

Two quadrant operation maintains the output voltage constant regardless the output power is

positive or negative. Ideal for PWM-speed controlled DC-motors and ATE systems.



Sequencer

Arbitrary Waveform generator or stand-alone automation.

The sequencer is integrated in the Ethernet controller.



High Voltage Isolation

A higher output isolation allows series operation up to 1000 V.



Secured Voltage and Current Setting

For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected

with a plastic cap from accidental adjusting.

More information about this:
Page 22



Software Control and Interfaces

Factory installed programming interfaces:

- Ethernet controller (incl. sequencer)
- PROFIBUS controller
- CANBUS controller
- RS232 controller
- IEEE488 controller
- ISO AMP CARD – isolated analog


Details about interfaces:
Page 22-24



Digital Voltage and Current Setting

Reliable, longlife digital encoders are implemented at the front panel.

Includes total front panel lock (also for CV / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Front Power Output

Bind posts at the front panel instead of at the rear panel.




19" Rack Mounting Adapter

The 19" mounting adapters makes it possible to position one or two units side by side in a 19" rack.

Dimensions and Weight

Width = half 19" Weight = 5,4 kg
Height = 2 U



Specifications


- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 (at 100% load)
- Efficiency : up to 89% (at full load)
- Output ripple and spikes : from 2 mV_{rms} / 8 mV_{pp}
- Regulation : from 0.2 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 4 ms (10-90%), optional from 0.2 ms
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 6.10⁻⁵ / 9.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

ES300 Series

300 W DC POWER SUPPLIES



Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- High programming speed
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power


Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Voltage and current control with 10 turn potentiometers
- For laboratory use or optional 19" rack mounting

Unit	Voltage range	Current range
ES 030 - 10	0 - 30 V	0 - 10 A

ES150 Series

150 W DC POWER SUPPLIES



Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power


Functionalities

- Master / Slave parallel and series operation with voltage and current sharing
- Voltage and current control with 10 turn potentiometers
- For laboratory use or optional 19" rack mounting
- Convection cooling

Units	Voltage range	Current range
ES 015 - 10	0 - 15 V	0 - 10 A
ES 030 - 5	0 - 30 V	0 - 5 A
ES 075 - 2	0 - 75 V	0 - 2 A
ES 0300 - 0.45	0 - 300 V	0 - 450 mA

Dimensions and Weight

Width = half 19" Weight = 3,1 kg
Height = 66 mm, incl. feet




Specifications

- Single phase input : 92-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 / 0.96 (at 100% load)
- Efficiency : up to 86% (at full load)
- Output ripple and spikes : 5 mV_{rms} / 15 mV_{pp}
- Regulation : 10 mV (0-100% load step)
- Recovery time : 50 μs (50-100% load step)
- Programming speed : 0.8 ms (10-90%)
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : 30.10⁻⁵ / 10.10⁻⁴
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN 55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

Available Options



Dimensions and Weight

Width = half 19" Weight = 1,7 kg
Height = 66 mm, incl. feet



Specifications

- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 / 0.83 (at 100% load)
- Efficiency : up to 84% (at full load)
- Output ripple and spikes : from 0.5 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 7 ms (10-90%)
- Analog programming accuracy : from 0.2%
- Output voltage and current stability : from 10.10⁻⁵ / 10.10⁻⁵
- MTBF : 500,000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN 55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20
- cTUVus

Available Options



Applications & Options

ES150 / 300 Series

EST150 Series

150 W, TRIPLE OUTPUT DC POWER SUPPLIES

Typical Applications

- Test and Measurement
- Component device testing
- Medical research equipment
- Controlled battery charging
- ATE in industrial production lines
- Accurate current sources
- Electronic Circuit Development
- Laboratory analysis

Available Options (Not for EST150)



Increased Output Power
The conservatively rated unit allows to deliver extra output power with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.



High Voltage Isolation
A higher output isolation allows series operation up to 1000 V.




Secured Voltage and Current Setting
For maximum security, the CV / CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Only available for the ES 150 series



Sequencer
Arbitrary Waveform generator or stand-alone automation. The sequencer is integrated in the Ethernet controller.

More information about this:
Page 22



Rear Power Output and Remote Sensing
Output terminals at the rear panel instead of bind posts at the front panel, includes remote sensing.



Software Control and Interfaces
Factory installed programming interfaces:

- Ethernet controller
- PROFIBUS controller
- CANBUS controller
- RS232 controller

External programming interface modules:


- IEEE488 controller module
- ISO AMP module

Details about interfaces:
Page 22-24



19" Rack Mounting Adapter
Using the 19" mounting adapters, it is possible to position the ES units in a 19" rack.

Several configurations possible with multiple ES and / or PSC or ISO AMP modules.



Features

- Very low output ripple and spikes
- EMC surpasses CE requirements: low emission & high immunity
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- Designed for long life at full power

Functionalities



- 3 independent, floating outputs
- Dual voltage tracking or series tracking mode
- 3 output On / Off buttons
- Convection cooling
- Voltage and current control with 10 turn potentiometers



Unit	Voltage range	Current range
EST 150		
Output 1	0 - 20 V	0 - 2.5 A
Output 2	0 - 20 V	0 - 2.5 A
Output 3	0 - 10 V	0 - 5 A

Dimensions and Weight

Width = half 19" Weight = 3,5 kg
Height = 146 mm, incl. feet



Specifications


- Single phase input : 90-265 V AC (48-62 Hz)
- Active Power Factor Correction (PFC) : 0.99 / 0.83 (at 100% load)
- Efficiency : up to 81% (at full load)
- Output ripple and spikes : from 0.5 mV_{rms} / 8 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : 100 μs (50-100% load step)
- Tracking accuracy : 0.5%
- Output voltage and current stability : 10.10⁻⁵ / 10.10⁻⁵
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

Standards

- Power supply standard : EN 61204-3
- Generic Emission : EN 61000-6-3 (EN 55022B)
- Generic Immunity : EN 61000-6-2
- Safety : EN 60950 / EN 61010 / SELV
- Insulation input / output : 3750 V_{rms}
- Enclosure : IP20

1200S Series

600 W & 1200 W DC POWER SUPPLIES



Features


- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes

Functionalities

- Redundant parallel operation with undervoltage alarm contact
- Screwdriver adjustable or analog programmable
- Parallel and series operation
- 19" rack mounting or wall mounting
- Convection cooling
- Remote sensing

S280 Series

280 W DC POWER SUPPLIES



Features

- Output programmable from zero till max.
- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Very low output ripple and spikes

Functionalities

- Screwdriver adjustable or analog programming
- Master / Slave parallel operation with current sharing
- Optional with external interfaces: Ethernet, IEEE488, RS232 or ISO AMP.

 Details about interfaces:
Page 22-24

- Euro rack mounting or wall mounting optional
- Redundant parallel operation with optional RA-10 adapter
- Convection cooling
- Remote sensing

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

Height = 88 mm Weight = 11 kg
Width = 433 mm
Depth = 385 mm

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

Height = 106 mm Weight = 2,8 kg
Width = 195 mm
Depth = 166 mm

Specifications


- Single phase input : 198-264 V AC (48-62 Hz)
99-132 V AC (48-62 Hz)
- Power Factor Correction : up to 0.76 (at 100 % load)
- Efficiency : up to 89% (at full load)
- Output ripple and spikes : 7 mV_{rms} / 20 mV_{pp}
- Regulation : from 5 mV (0-100% load step)
- Recovery time : 300 μs (50-100% load step)
- Stability : 30.10⁻⁵
- MTBF : up to 1.000.000 hrs
- Operating ambient temperature : -20 to +50 °C, derate current linearly to 20% at 75 °C

Specifications

- Single phase input : 195-265 V AC (48-62 Hz)
100-132 V AC (48-62 Hz)
- Efficiency : up to 88% (at full load)
- Output ripple and spikes : 5 mV_{rms} / 25 mV_{pp}
- Regulation : 5 mV (0-100% load step)
- Recovery time : from 100 μs (50-100% load step)
- Programming speed : from 10 ms (10 to 90%)
- Analog programming accuracy : from 0.2%
- Stability : 50.10⁻⁵ / 10.10⁻⁴
- MTBF : 500.000 hrs
- Operating ambient temperature : -20 to +50 °C

240S Series

240 W DC POWER SUPPLIES



Features

- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes


Functionalities

- Redundant parallel operation with under voltage alarm contact
- Screwdriver adjustable or analog programmable
- Parallel and series operation
- Bench operation with bench adapter (optional)
- Euro rack, 19" rack or wall mounting optional
- Convection cooling
- Remote sensing

Unit	Voltage range	Current range
240 S 24	12 - 15 V	12 A
	24 V	10 A
	30 V	8 A

SX Series

75 W / 150 W DC POWER SUPPLIES



Features

- Very high reliability, designed for long life at full power
- EMC surpasses CE requirements: low emission & high immunity
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very low output ripple and spikes

Functionalities

- 2 outputs; series, parallel or dual mode
- Redundant parallel operation with external diodes
- Remote control with an external potentiometer
- Bench operation with bench adapter (optional)
- Euro rack or wall mounting optional
- Convection cooling

Units	Voltage range	Current range
75 SX 5	3.5 - 6 V	13 A
150 SX 5	3.5 - 6 V	26 A
75 SX 15-15	2 x 6 - 15 V	2.5 A
150 SX 15-15	2 x 6 - 15 V	5 A
150 SX 75-75	2x 15 - 75 V	1 A
150 SX 200 - 200	2x 35 - 200 V	0.3 A
ST 150	3.5 - 6 V	13 A
	2x 6 - 15 V	2.5 A

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

Height = 240 mm Weight = 2 kg
Width = 71 mm
Depth = 156 mm

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Dimensions and Weight

75SX	150SX
Height = 100 mm	Height = 233 mm
Width = 36 mm	Width = 36 mm
Depth = 172 mm	Depth = 172 mm
Weight = 0,6 kg	Weight = 1,2 kg

Specifications

- | | | | |
|----------------------------|--|---------------------------------|--|
| • Single phase input | : 195-265 V AC (48-62 Hz)
100-132 V AC (48-62 Hz) | • Recovery time | : 200 μs (50-100% load step) |
| • Efficiency | : up to 88% (at full load) | • Stability | : 30.10 ⁻⁵ |
| • Output ripple and spikes | : 5 mV _{rms} / 15 mV _{pp} | • MTBF | : 1.000.000 hrs |
| • Regulation | : from 10 mV (0-100% load step, external sensing) | • Operating ambient temperature | : -10 to +50 °C, derate current linearly to 20% at 80 °C |


Specifications

- | | | | |
|----------------------------|---|---------------------------------|--|
| • Single phase input | : 185-264 V AC (48-62 Hz)
98-132 V AC (48-62 Hz) | • Stability | : 50.10 ⁻⁵ |
| • Efficiency | : up to 84% (at full load) | • MTBF | : 1.000.000 hrs |
| • Output ripple and spikes | : from 5 mV _{rms} / 20 mV _{pp} | • Operating ambient temperature | : -20 to +50 °C, derate current linearly to 20% at 75 °C |
| • Regulation | : from 10 mV (0-100% load step) | | |
| • Recovery time | : from 100 μs (50-100% load step) | | |

U Series

6 W DC POWER SUPPLIES

SM3300 interfaces



Features

- Very low output ripple and spikes (linear design)
- Protected against all overload and short circuit conditions
- Excellent dynamic response to load changes
- Very high reliability, designed for long life at full power

Functionalities

- Accurate 20 turn trimmer for adjusting output voltage (5U5, 5U15-15) or current (UCS50)
- Parallel and series operation
- Eurocard, rail or wall mounting optional
- Convection cooling

Dimensions and Weight

Height = 35 mm Weight = 0,4 kg
Width = 58 mm
Depth = 94 mm

Units	Voltage range	Current range
5 U 5 (voltage source)	5 - 6 V	1 A
5 U 15 - 15 (voltage source)	2 x 12 - 15 V	0.2 A
UCS 50 (current source)	30 V	0 - 50 mA

Standards

- Power supply standard EN 61204-3
- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation input / output 3750 V_{rms}
- Enclosure IP20

Specifications

- Single phase input : 230 / 115 V AC (48-62 Hz)
- Output ripple and spikes : 0.5 mV_{rms} / 2 mV_{pp} for 5U5 and 5U15-15
30 µA_{pp} for UCS50
- Regulation : 5 mV (0-100% load step) for 5U5 and 5U15-15
3 µA (load 600-0 Ohm) for UCS50
- Recovery time : from 10 µs (10-100% load step)
- MTBF : 1.000.000 hrs
- Operating ambient temperature : -20 to +50 °C



Interfaces	
INT MOD ANA	Analog controller
INT MOD DIG	Digital (user) I/O
INT MOD CON	Isolated contacts
INT MOD SER	Serial controller
INT MOD MS	Master / Slave Controller

General Features

- Isolated from the output voltage
Working voltage 1000V
- Floating with respect to earth

Features INT MOD ANA
Analog controller

- High accuracy, low drift
- 16 bit AD and DA conversion.
- Compatible with other Delta Elektronika 15p analog interfaces

Features INT MOD DIG
Digital (user) I/O

- 8 inputs Logic high = 2.5 ... 30 V, Logic low = 0 V
- 8 Open Collector outputs 0 - 30 V, max. 200 mA

Features INT MOD CON
Isolated contacts

- 4 relays with make-and-break contacts
- Additional (floating) Interlock with 24V enable system

Features INT MOD SER
Serial controller

- Multi protocol RS232, RS485, RS422, USB
- Web based configuration

Features INT MOD MS
Master / Slave Controller

- Expected in 2013

PSC Series

INTERFACES



Interface

PSC-ETH	Ethernet Controller
---------	---------------------

Features

- Voltage and current programming and monitoring
- Uses existing IP-networks
- Integrated sequencer
- Software calibration
- Isolated digital user in- and outputs
- Factory installed or external module

Specifications

- Programming and monitoring resolution: 16 bit
- Linearity error: +/- 2 LSB (prg.) +/- 1 LSB (mon.) TC = 10 ppm/°C
- Input voltage (external module): 98-264 V AC (48-62 Hz)

PSC Series

INTERFACES



Interfaces

PSC-CAN	CANopen Controller
PSC-PB	PROFIBUS Controller

Functionalities

CANopen Functionalities:

- SYNC Object
- Emergency Object
- Node Guarding
- Heartbeat
- Expedited and Nonexpedited SDO transfer
- Node address range 1 - 127

Features

- Voltage and current programming and monitoring
- Node address setting selectable
- Read back of power supply status signals
- 600 V galvanic isolation
- Factory installed

Specifications

- Programming and monitoring resolution: 14 bit
- Communication speed: up to 12Mbit/s for PSC-PB up to 1Mbit/s for PSC-CAN
- Full scale accuracy: < 0.1%

PROFIBUS Functionalities:

- Slave in a PROFIBUS-DP network
- DP-V0 standard acc. IEC 61784 Ed. 1:2002 CPF 3/1
- PROFIBUS protocol acc. IEC 61158
- Slave address range 1 - 127



Functionalities



Interface:

- Monitoring status outputs: ACF, DCF, CC-mode, Over Temp, PSOL etc.
- Isolated user inputs (8) and outputs (6)
- Software calibration for off-set and full scale



Integrated sequencer:

- Converts power supply into an arbitrary waveform generator
- Stand-alone automation like a PLC
- 25 free programmable sequences, 2000 steps each
- Combination of very fast and slow sequences
- Possibility to create loops, sub-routines, ramps etc.

External module PSC-ETH

Standards:

- Generic Emission EN 61000-6-3 (EN 55022B)
- Generic Immunity EN 61000-6-2
- Safety EN 60950 / EN 61010
- Insulation in/outputs - case 1000 V_{DC}
- Enclosure IP20



Dimensions and weight:

Dimensions: 89 x 86 x 119 mm
Weight: 0,7 kg
Optional 19" rack mounting



Interfaces

PSC-232	RS232 Controller
PSC-488	IEEE488 Controller

Functionalities

- Monitoring status outputs: ACF, DCF, CC-mode, Over Temp, PSOL etc.
- Two isolated user inputs and outputs (external modules only)
- Software calibration for offset and full scale
- PSC-488 Units can also be configured as PSC-232

Features

- Voltage and current programming and monitoring
- Up to 15 PSCs on one BUS
- Software calibration
- Isolated digital user in- and outputs
- Factory installed or external module

Specifications

- Programming and monitoring resolution: 16 bit
- Linearity error: +/- 2 LSB (prg.) +/- 1 LSB (mon.) TC = 10 ppm/°C
- Input voltage (external module): 98-264 V AC (48-62 Hz)

External module PSC-232/488

Standards:

- Generic Emission: EN 61000-6-3 (EN 55022B)
- Generic Immunity: EN 61000-6-2
- Safety: EN 60950 / EN 61010
- Insulation input / output: 1000 V_{rms}
- Enclosure: IP20

Dimensions and weight:

Dimensions: 89 x 86 x 119 mm
Weight: 0,8 kg
Optional 19" rack mounting



Analog Series

ANALOG INTERFACES

Unit	
ISO AMP	Isolated Analog Programming

Features

- Selectable 0-5 V and 0-10 V signal levels
- Isolated programming and monitoring of U, I and status signals
- Prevents problems with earth loops and CM-voltages
- Factory installed or **external module**
- Reinforced safety insulation 1000 VDC*

* External module has Basic insulation only



Specifications

- Programming and monitoring offset : +/- 60 μ V typical
- Full scale error : 0.1% calibrated
- Non-linearity : 0.01% typical, TC = - 65ppm/ $^{\circ}$ C
- Common mode rejection : 80 dB @ 50 Hz

Unit	
M / S - ADAPTER	Master / Slave Series Adapter

Features

- Connecting SM3000 and ES-series in M/S series mode
- Equal voltage sharing in series operation
- Series operation possible up to 600 V



Specifications

- Programming and monitoring offset : +/- 60 μ V typical
- Full scale error : 0.1% calibrated
- Non-linearity : 0.01% typical, TC = - 65ppm/ $^{\circ}$ C
- Common mode rejection : 80 dB @ 50 Hz

Unit	
AL 24-48	Under and Over Voltage Alarm


Features

- Large adjustment for use on both 24 V and 48 V
- Two isolated comparator circuits with alarm contact and LED indication
- Monitors output voltage of 2 power supplies



Specifications

- Undervoltage range : 18-48 V
- Overvoltage range : 24-64 V
- Insulation between circuits : 500 V DC
- Alarm contact : 100 mA / 30 V, Normally Closed

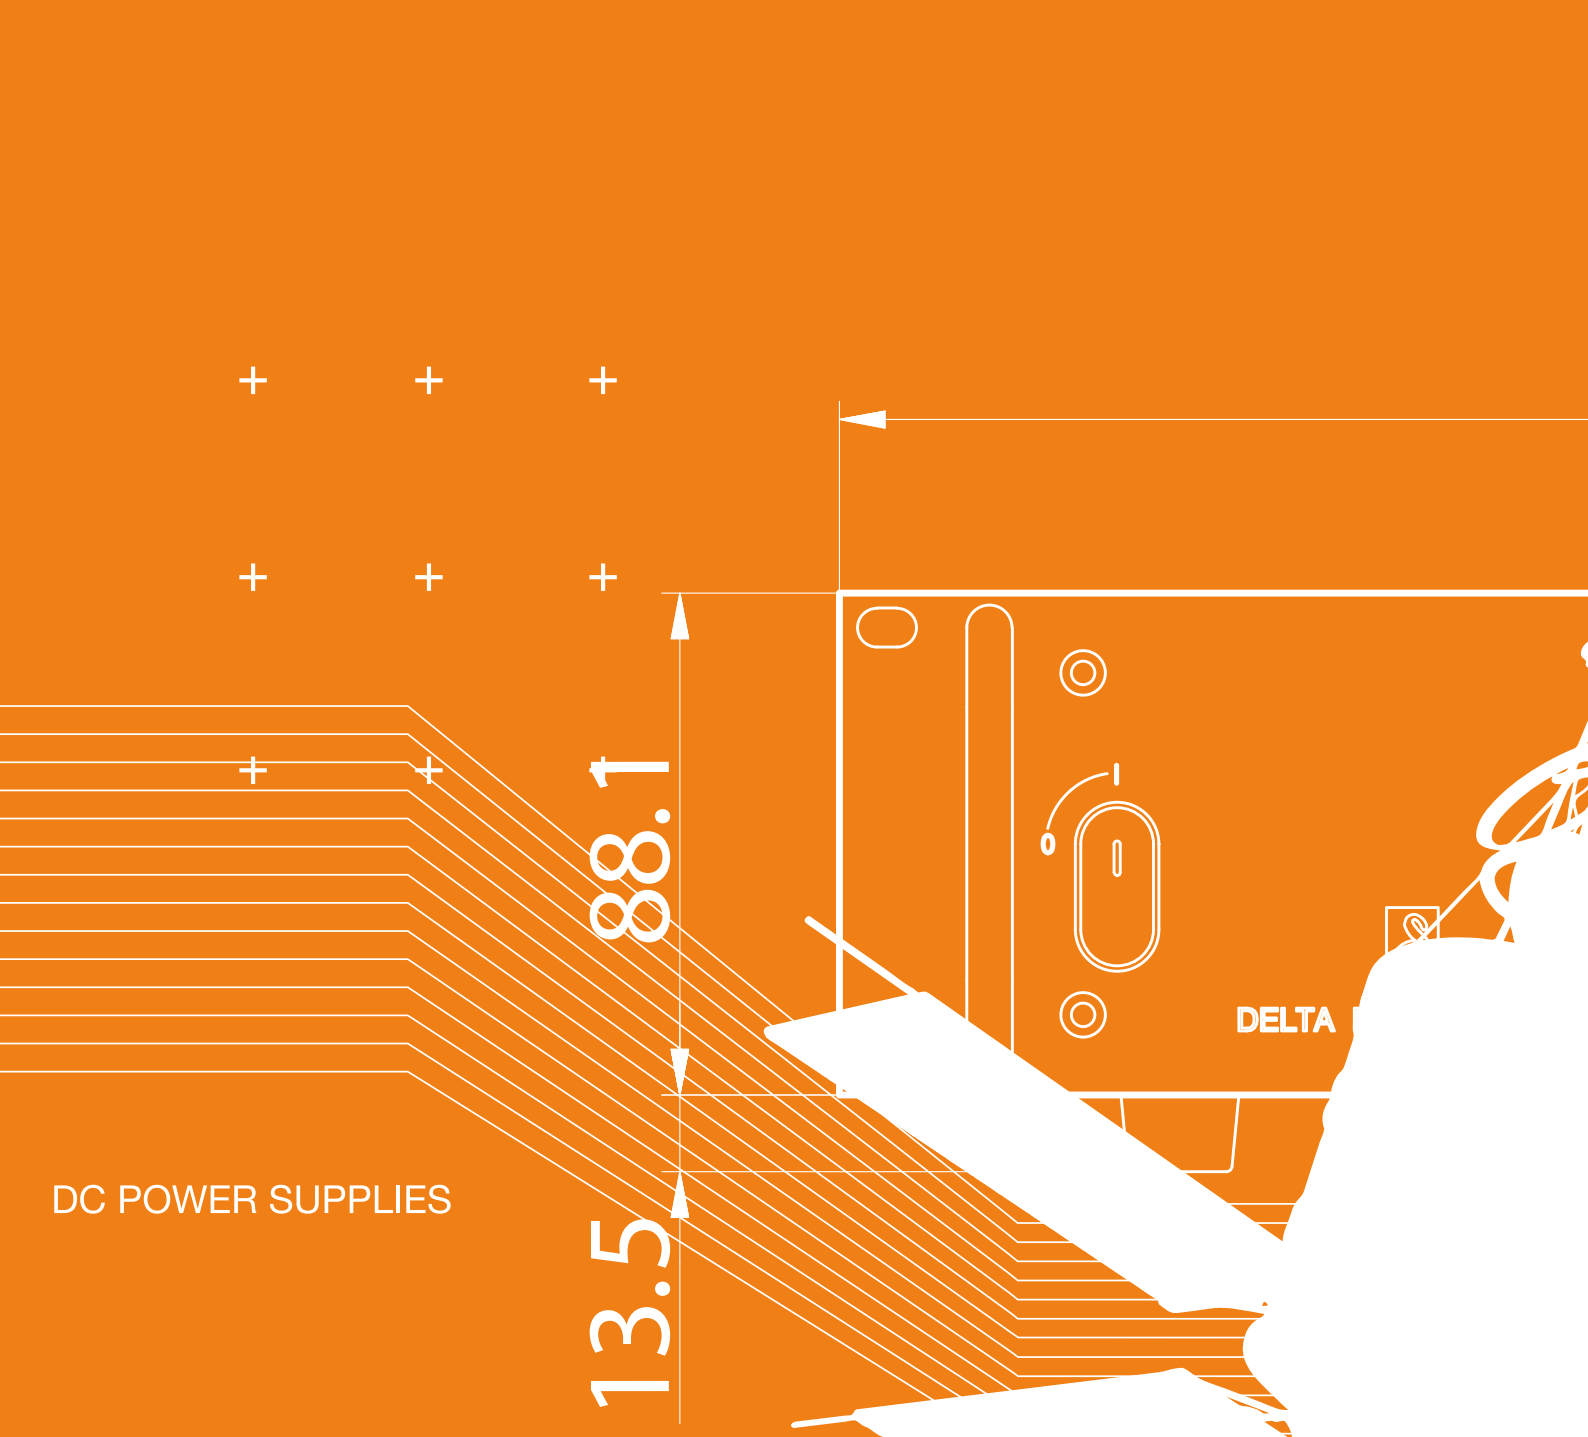

DC POWER SUPPLIES

88.1

13.5

DELTA



DELTAELEKTRONIKA B.V.

PO Box 27
4300 AA Zierikzee
The Netherlands
Tel. +31 111 413656
Fax. +31 111 416919

Vissersdijk 4
4301 ND Zierikzee
The Netherlands

www.deltapowersupplies.com