



|SPANpixel

Innovative Resizable LCD Solutions from Ultrawide
Switched displays, with ultra-wide, customized aspect ratios



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

Size	Model No.	Brightness	Resolution	PPI	Ratio	Contrast	Power	Temp. Range	Viewing Angle	Dimension
6.2"	0635-T	1000	1024 x 250	169	16:4	800:1	1.6W	0 ~ 50°C	150(H) x 145(V)	165.75 x 55 x 3.85
13.9"	1393-A	600	1280 x 398	96	16:5	700:1	19W	0 ~ 50°C	170(H) x 160(V)	358.5 x 130 x 18
15"	1505-E	1000	1280 x 242	86	16:3	1000:1	9W	0 ~ 50°C	170(H) x 160(V)	396 x 94.2 x 12.2
15.9"	1515-E	1000	1280 x 512	86	16:6.4	1000:1	12W	0 ~ 50°C	170(H) x 160(V)	396 x 173.6 x 12.1
16.3"	1624-B	350	1366 x 238	84	16:2.8	1000:1	7.2W	0 ~ 50°C	178(H) x 178(V)	431.8 x 95.8 x 15.1
17.2"	1725-B	1000	1366 x 510	84	16:6	850:1	16.7W	0 ~ 50°C	178(H),178(V)	430.3 x 178.4 x 14
NEW 18.7"	1875-B	1000	1920 x 146	103	16:1.2	1200:1	8.7W	0 ~ 50°C	178(H),178(V)	497x 54.4 x 13.76
NEW 19.1"	1916-B	1200	1920 x 388	103	16:3:2	1500:1	13W	0 ~ 50°C	178(H),178(V)	497.6x121.3x16.55
NEW 19.4"	1945-B	1000	1920 x 536	103	16:4.5	1300:1	22W	-20 ~ 70°C	178(H),178(V)	497 x 149.8 x 13.31
21.2"	2125-A	1000	1920 x 316	91	16:2.6	1000:1	17W	0 ~ 50°C	170(H) x 160(V)	555.9 x 116.91 x 17.1
22"	2203-Y	500	1920 x 1920	123	1:1	650:1	29.6W	0 ~ 50°C	178(H),178(V)	409.56 x 409.56 x 12.6
23.6"	2368-C	1600	1280 x 1280	76	1:1	1500:1	82.6W	0 ~ 50°C	178°(H),178°(V)	657 x 657 x 28.65
NEW 24"	2405-M	1000	1920 x 360	81	16 : 3	5400:1	27W	0 ~ 50°C	178(H),178(V)	615.3 x 139.35 x 17.15
NEW 24.4"	2445-M	800	1920 x 540	81	16:4.5	4000:1	28.7W	0 ~ 50°C	178(H),178(V)	615.3 x 195.38 x 15.65
NEW 28"	2805-A	1000	1920 x 360	70	16 : 3	1000:1	22W	0 ~ 50°C	178(H),178(V)	732x 165x 17.3
28.6"	2861-Y	3200	1920 x 540	70	16:4.5	6000:1	55W	-20 ~ 60 °C	178(H) x 178(V)	731.46x 229.49x 20.34
	2869-Y	1800	1920 x 540	70	16:4.5	6300:1	34W	-20 ~ 60 °C	178(H) x 178(V)	731.46x 229.49x20.34
NEW 29.4"	2940-Y	2000	1920 x 720	70	16:6	6100:1	60W	-20 ~ 60 °C	178(H) x 178(V)	735.4x 302.6x 19.8
	2945-A	1000	1920 x 720	70	16:6	5400:1	37W	0 ~ 50°C	178(H) x 178(V)	735.4 x 302.6 x 20.9
33.2"	3325-Y	1000	1920 x 1920	82	1:1	600:1	56W	0 ~ 50°C	178(H) x 178(V)	612.96 x 612.96x12.5
35.2"	3525-I	1000	1850 x 2160	80	7.7:9	6400:1	80W	0 ~ 50°C	178°(H),178°(V)	626.5 x 707.9 x 25
35.6"	3565-I	1000	1900 x 2160	80	8:9	7000:1	70W	0 ~ 50°C	178°(H),178°(V)	626.5 x 707.9 x 25
NEW 35.8"	3585-Y	1000	1920 x 532	55	16:4.4	4200:1	56W	0 ~ 50°C	178(H) x 178(V)	895.51 x 265.68 x 31.1
36.6"	3665-I	1000	1920 x 290	52	16:2.4	7500:1	19W	0 ~ 50°C	178(H) x 178(V)	960x174.2x15.8
36.8"	3685-I	1000	1920 x 358	52	16:2.9	7600:1	22W	0 ~ 50°C	178(H) x 178(V)	960 x 207.3 x 16
37"	3701-Y	3000	1920 x 540	54	16:4.5	5000:1	85.2W	0 ~ 50°C	178(H) x 178(V)	935.5x 287.5x 18.1
	3705-Y	1000	1920 x 540	54	16:4.5	5600:1	71W	-20 ~ 60 °C	178(H) x 178(V)	923.3 x 277.1 x 30.05
37.6"	3805-I	1000	1920 x 540	52	16:4.5	8000:1	31.4W	0 ~ 50°C	178(H) x 178(V)	960 x 302.4 x 15.8
NEW 42.1"	4215-I	800	1900 x 2160	69	8:9	6000:1	131W	0 ~ 50°C	178(H) x 178(V)	741.3 x 838.02 x 22.4
42.2"	4221-Y	2600	1920 x 480	47	16:4	4600:1	132W	0 ~ 50°C	178(H) x 178(V)	1069.8 x 293.9 x 23.1
	NEW 4225-Y	1000	1920 x 480	47	16 : 4	4200:1	62W	0 ~ 50 °C	178(H) x 178(V)	1059.48 x 283.52 x 56.9
NEW 43"	4305-Y	1000	3840 x 720	91	16 : 3	5000:1	50W	-20 ~ 60 °C	178(H) x 178(V)	1112.3x 228.5 x 27.8
43.5"	4350-I	2000	1920 x 268	44	16:2.2	7000:1	68W	0 ~ 50°C	176(H) x 176(V)	1121.7 x 184.8 x 21.6
NEW 48.5"	4851-Y	3000	1920 x 360	40	16:3	7700:1	71W	-20~ 60°C	178(H) x 178(V)	1232.4 x 249.6 x 22.8
	4855-Y	1000	3840 x 720	81	16:3	5000:1	44.3W	-20 ~ 60 °C	178(H) x 178(V)	1232.4x 249.6 x 25.4
49.5"	4959-I	1800	3840 x 1080	81	16:4.5	6400:1	110W	0 ~ 50°C	178(H) X 178(V)	1244.6 x 378.7 x 25.4
57.4"	5745-I	1000	3840 x 810	68	16:3	5000:1	70W	0 ~ 50°C	178(H) x 178(V)	1462.5 x 333.84 x 22.11
67.4"	6745-K	1000	3840 x 1080	59	16:4.5	5000:1	115W	0 ~ 50°C	178°(H),178°(V)	1696.3 x 497 x 28.2



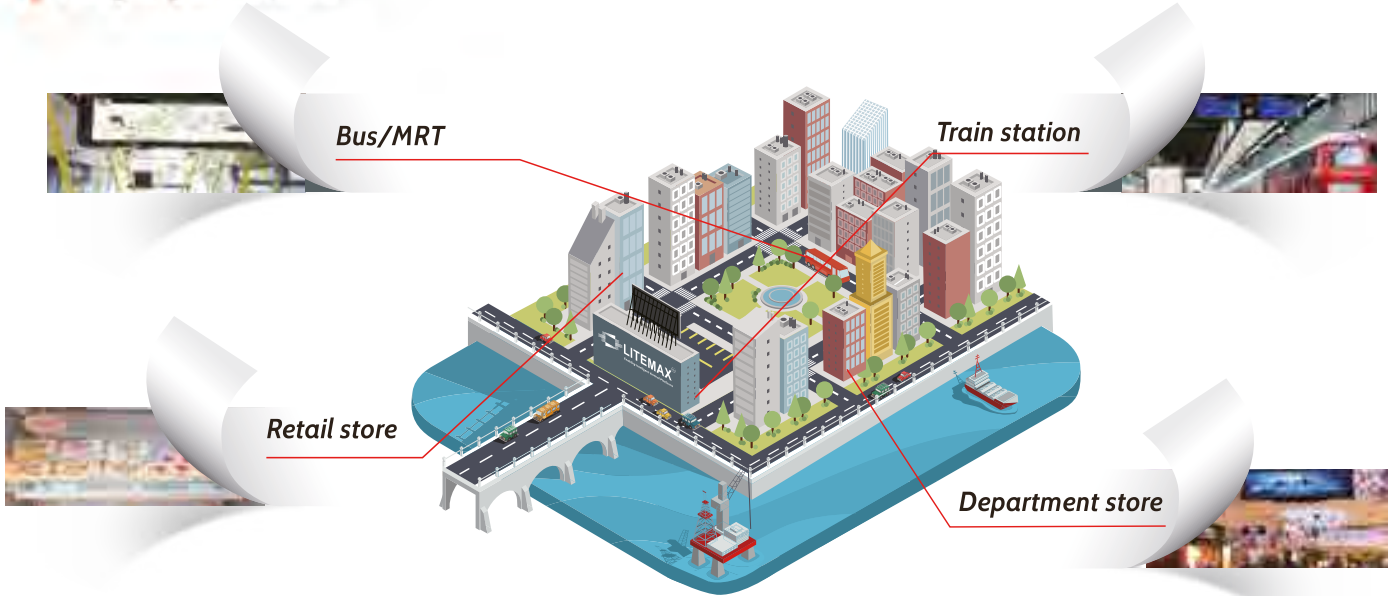

More Than 20 Years of Industrial Solution Innovation

Litemax has enjoyed a strong reputation for expertise in sunlight readable, high brightness industrial displays, but there is so much more that we offer. Through resizing, customizations and industrial computing, we raise the standards of industrial-grade displays, digital signage applications and embedded computing to enable intelligent vertical market platforms around the world. From powering the devices in your surroundings and the machines you depend on, we create value for our customers, shareholders and ecosystem, with one ultimate goal: engineering excellence in everything we do.

Founded in 2000, Litemax has grown from pioneering the sunlight readable, high brightness industrial display market to one of the global leaders in intelligent vertical market platforms. Our technology and innovation can be found in our high-performing, ultra-efficient solutions for transportation, industrial, marine, digital signage, rugged portables and healthcare.

By merging WynMax, a well-known IPC designer, in 2016, we provide industrial motherboards, box PCs, panel PCs and various other industrial computing solutions. Litemax has developed a global operation infrastructure with extensive marketing and distribution channel relationships, and our products are available through leading distributors and retailers in over sixty countries worldwide.

For more information, please visit www.litemax.com.



LITEMAX ELECTRONICS INC.

Founded in August 2000
 IPO in 2012 (Stock Code: 4995)
 Headquarters: Taipei, Taiwan
 US Office: Fremont, California
 Europe Office: Bremen, Germany
 China Offices: Shanghai, Beijing

Industrial Display Division

- Spanpixel (Resizing LCD)
- Durapixel (High Brightness LCD)
- Navpixel (Marine LCD/ Panel PC)

Industrial Computing Division

- Industrial Motherboard
- I-Box Box PC Panel PC
- Fanless - Touch
- Micro-Box - Waterproof
- SDM




Core Technology

Why LiteMAX Spanpixel?

To resize a LCD is to literally cut the glass, polarizers, circuits and circuit boards to a new size. Years ago, it was thought impossible to preserve the original performance of a previously manufactured LCD once the glass circuits are cut. However, LiteMAX has done it, over and over again, becoming the world's leading pioneer and leader in LCD resizing solutions, offering the following advantages:

- Innovative stretched displays with ultra-wide, customized aspect ratios
- Comprehensive portfolio sizes ranging from 6" to 67"
- Exclusive patent licensee to design and manufacture in Taiwan
- Certified with EN50155 for railways and rolling stock applications

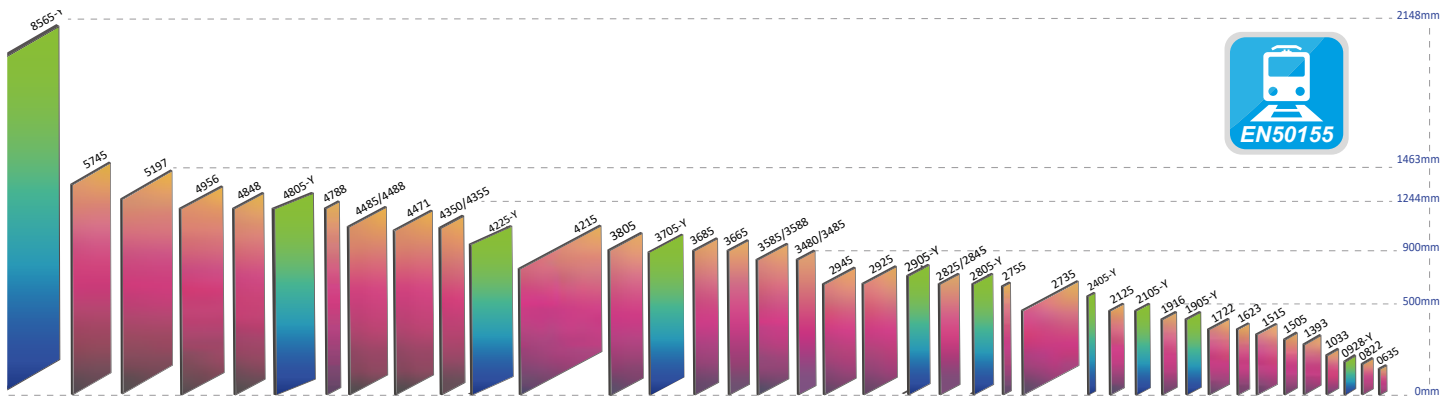

Industry Pioneer with Proven Records

- Among the world's firsts to design and manufacture custom-sized LCD display applications
- Long term investments in resizing technologies and manufacturing know-how for over 10 years
- Extremely high yield rate and industry-leading high quality

High Quality Panel Selection

Carefully and thoughtfully choosing the most suitable panel materials for various custom sizes

Sophisticated Cutting Process

LiteMAX Spanpixel portfolio is 100% made in Taiwan. From design to testing, manufacturing to shipping, our office in Taipei is where all the magic happens. We welcome customers from all over the world to visit us and we would be delighted to take you on a tour.

Resizing LCD Patents Cross License



◀ LiteMAX is an exclusive licensee in Taiwan to manufacture resizing LCD.



◀ Each Spanpixel comes with a patent laser sticker on the back.



◀ Shock & Vibration Test



◀ Chamber Test

Key features of Spanpixel Series

Space

Standard LCD displays come with standard aspect ratios, which would not fit in spaces such as on-board train cars, taxi tops and many more

Attractiveness

Standard LCD displays come with standard aspect ratios, which would not easily stand out in the crowd to attract audiences

Brightness


Standard LCD displays come with standard levels of brightness, which would not be readable under high ambient light and in turn fail to deliver messages

Daisy Chain

Daisy chain is a wiring scheme in which multiple devices, and in this case, Litemax displays, are wired together in sequence or in a ring. There is a master chain that may come with multiple slave chains. The objective of daisy chains is to department stores, large campuses, sports

arenas or stadiums are among many scenarios where daisy chain technology brings great benefits to system integrators and designers. 100M long distance video/audio transmission via an easy network CAT5 cable is the most cost effective solution for transportation.

Daisy Chain Long Distance Transmission Video/Audio

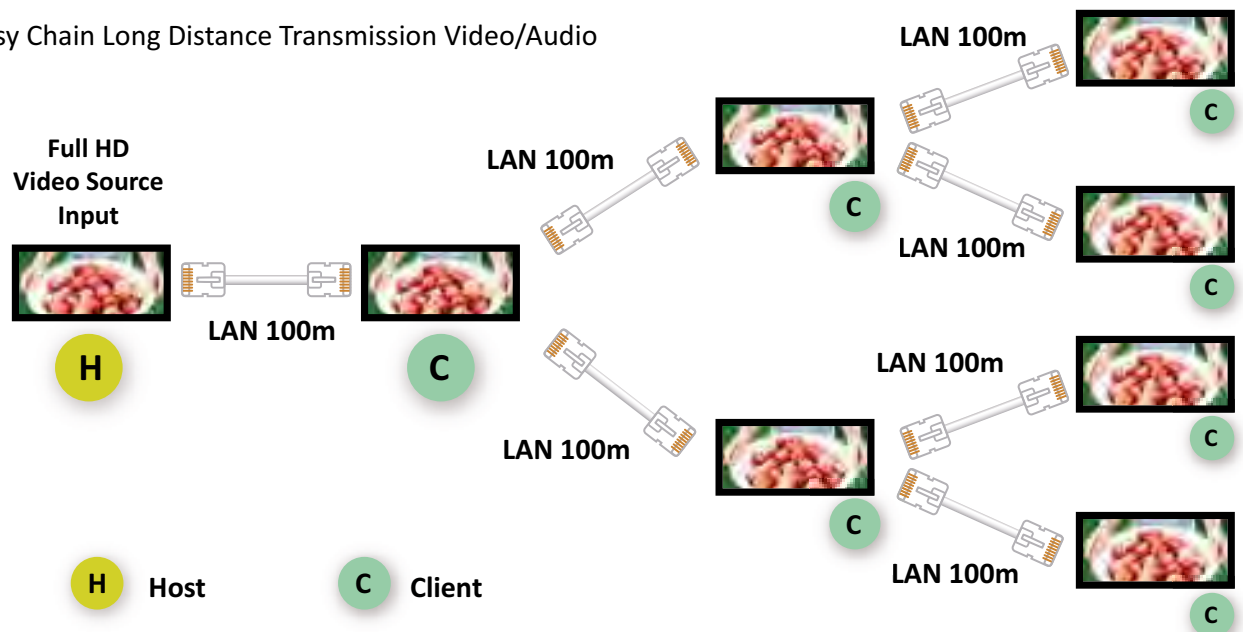


Display over USB

Why choose a USB connected display over a standard VGA or HDMI solution using VGA, DVI, or HDMI? In many cases, a traditional display is the logical, inexpensive choice. However, there are cases where a USB display is a much better solution, without compromise:



- USB is the only port existing in future PC
- Plug and display simplicity: easily transmits signal and power at the same time
- Smooth video playback with a low latency connection

- Expandability to multiple displays while lowering overall infrastructure, installation and maintenance costs




Spanpixel SSD2755

32" LCD Panel 16:9

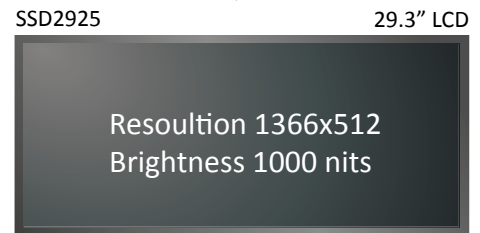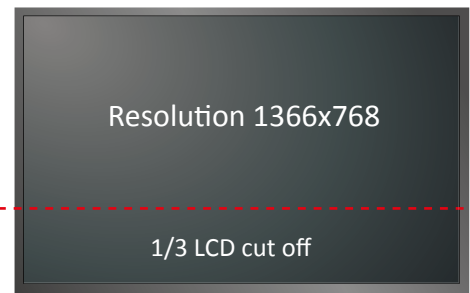


Display Module Illustration

- Spanpixel products (LED B/L)
- Up to 3000 nits of ultra high brightness
- Wide temperature range: -0C ~ 50°C
- Long life time: up to 100K hours life time
- High uniformity: 80% uniformity compared with CCFL (75%)
- Low power consumption
- Low radiation, no interference: more stable compared to traditional CCFL panel
- DC power input: no need for AC inverter any more

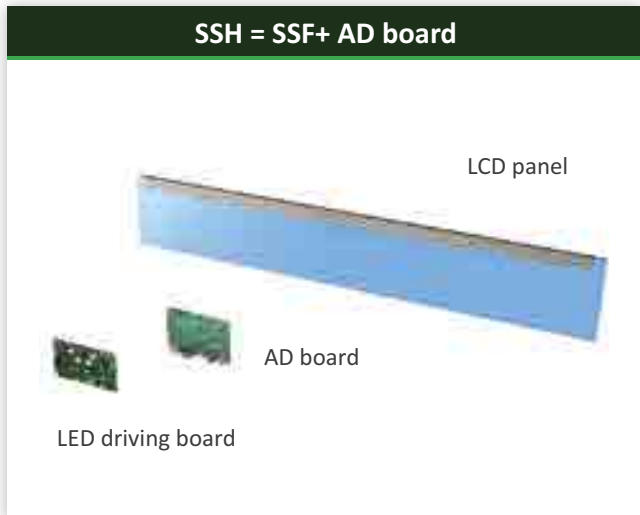

Litemax Display Naming Rule

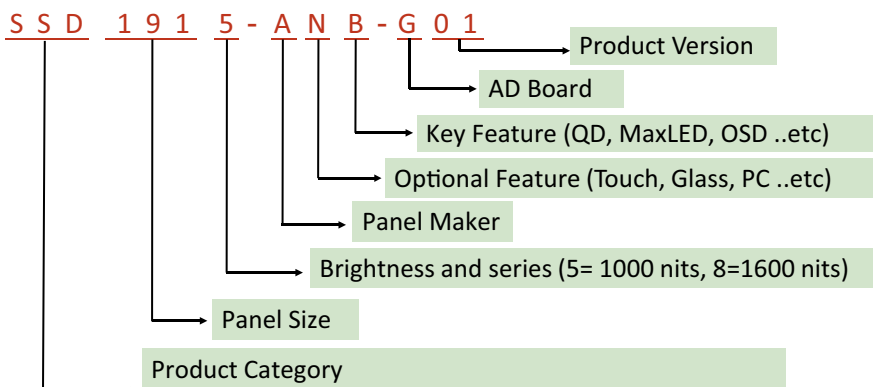




LITEMAX

www.litemax.com


Enabling Intelligent Vertical Platforms

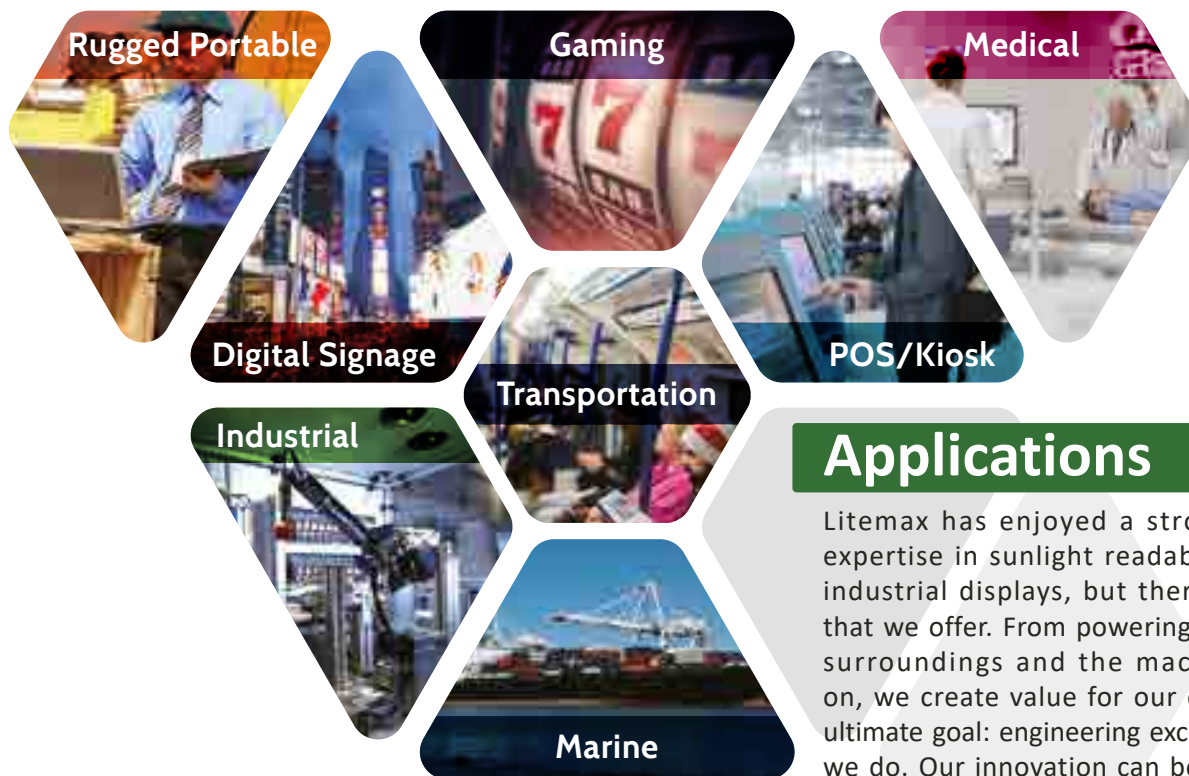

Applications

Litemax has enjoyed a strong reputation for expertise in sunlight readable, high brightness industrial displays, but there is so much more that we offer. From powering the devices in your surroundings and the machines you depend on, we create value for our customers with one ultimate goal: engineering excellence in everything we do. Our innovation can be found in our high-performing, ultra-efficient applications.

Vision 2023

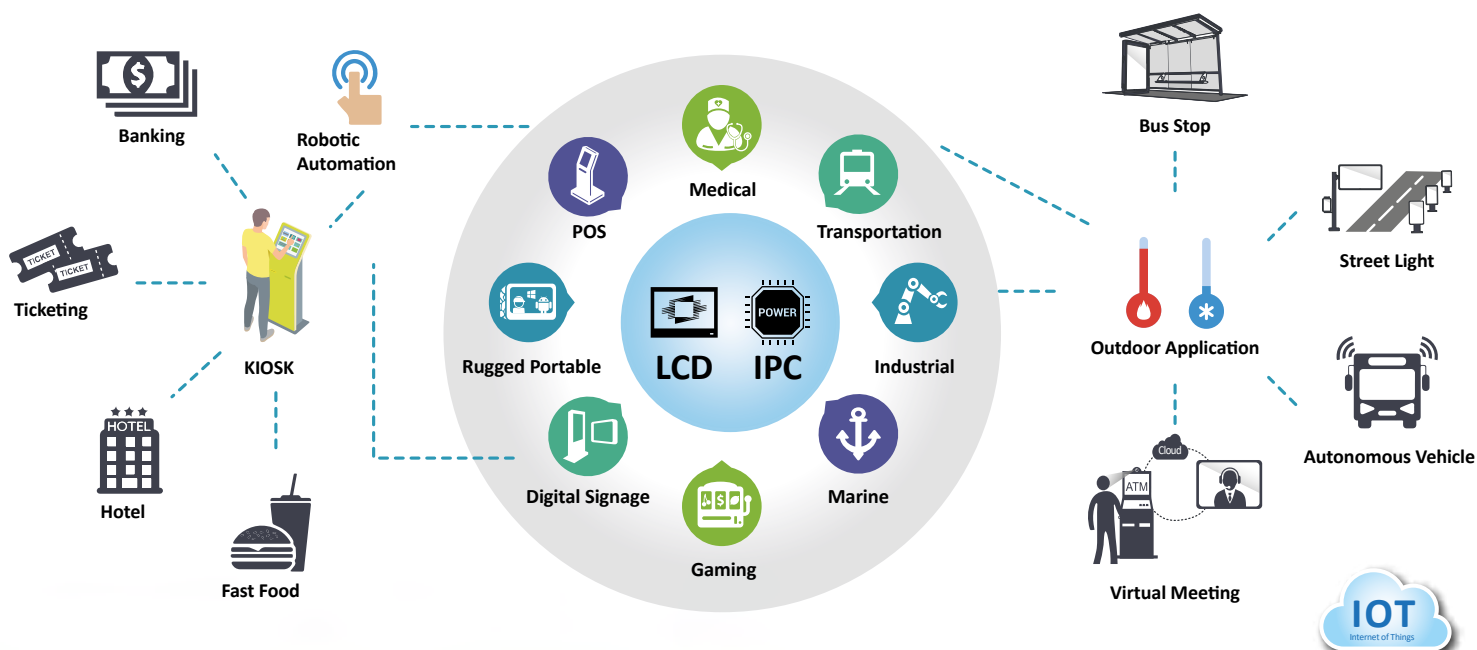

ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



- SSD4215-I**
Squared Screen Digital Signage System
- Resizing LCD (8 : 9)
 - Sunlight readable (800 nits)
 - Resolution: 1900 x 2160
 - MaxRGB (NTSC 91%)
 - BL MTBF: 100,000 hours




Thinner
54mm

- SCD4956 (Hanging)**
Double-Sided and Hanging LCD
- Ultra wide screen (16:4.5)
 - Sunlight readable (1,200 nits)
 - Resolution: 1920 x 538
 - Only 54mm thin




- SCD5745-I**
Double-Sided and V-Shape PIS Solution
- Ultra wide screen (16:3.4)
 - Sunlight readable (1,000 nits)
 - High resolution: 3840 x 807
 - IP65 Waterproof
 - Intel® Skylake motherboard inside

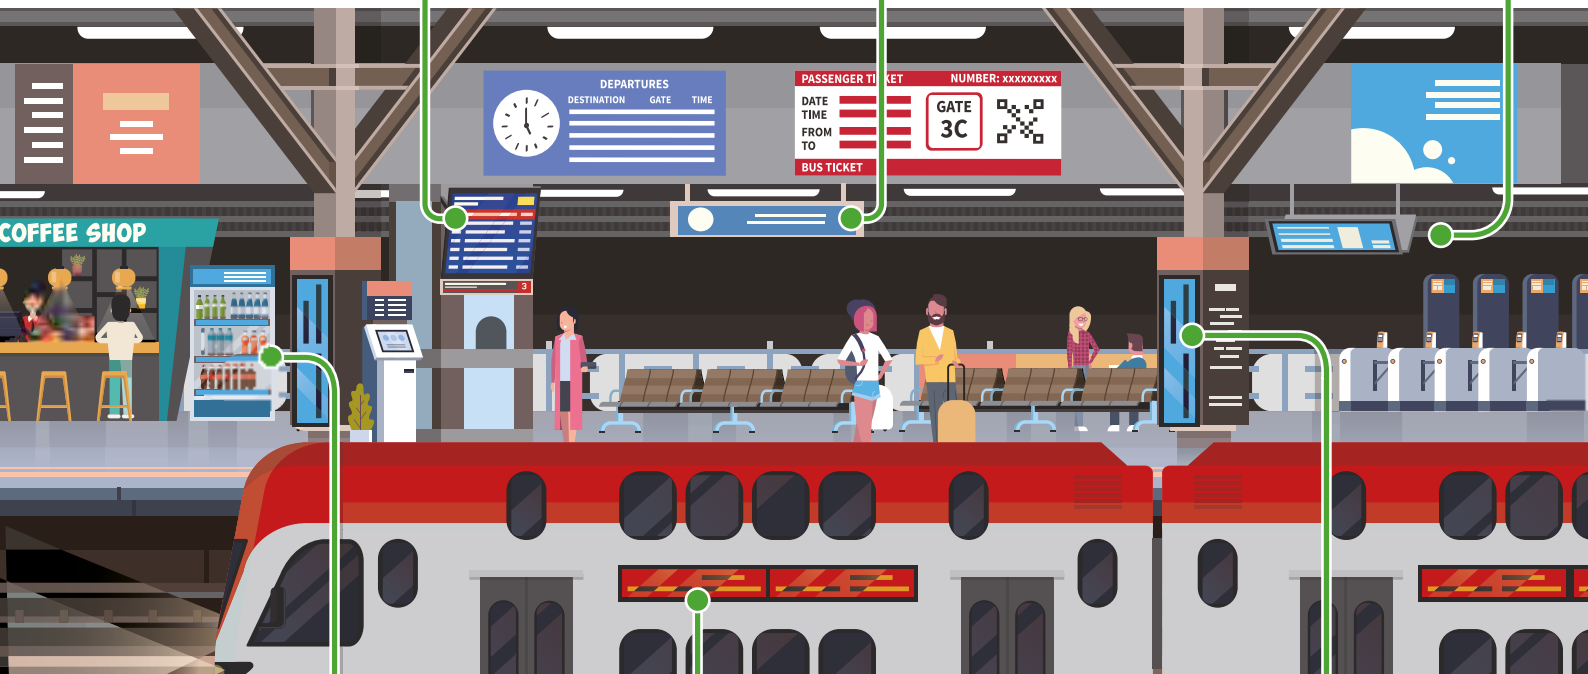

- SSD2106-Y**
Smart Shelf Price Tags
- Stretched digital (aspect ratio of 16:1.1)
 - Brightness of 1,200 nits
 - Active area: 529.4x 36.3 mm
 - Resolution: 1920 x 132

- SSD2313-Y**
Smart Shelf Price Tags
- Ultra wide screen (16:1.3)
 - Brightness of 500 nits
 - Active area: 585.6x 48.2 mm
 - Resolution: 1920 x 158

- SSD2755**
Smart Shelf Price Tags and Advertising System
- Ultra wide screen (16:1)
 - Brightness of 200/1,000 nits
 - Active Area: 697.7x 35.7 mm
 - Resolution: 1366 x 70

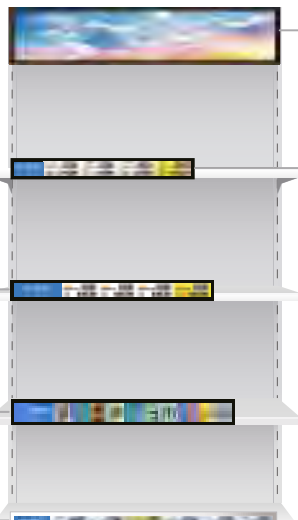

- SSD2805-Y**
Stretched Digital Signage
- Ultra wide screen (16:3)
 - Sunlight readable (1,000 nits)
 - Resolution: 1920 x 360
 - Wide-viewing angle 178°(H), 178°(V)

- SSD1875-M**
Smart Shelf Price Tags
- Stretched digital (aspect ratio of 16:1.2)
 - Brightness of 1,000 nits
 - Active area: 476.6x 36.4 mm
 - Resolution: 1920 x 146

- SSD5745-B**
World's 1st 57.4" 4K Resizing LCD
- Ultra wide screen (16:3.4)
 - Sunlight readable (1,000 nits)
 - Resolution: 3840 x 810
 - Wide-viewing angle 178°(H), 178°(V)



SCD3685-I

High-performing sunlight readable, high brightness LCD solutions from Litemax Outdoor ready functionality with industry leading LED backlight technology.



DLD3200-B
32" Outdoor Digital Signage

- Sunlight readable (2,000 nits)
- Resolution: 1920 x 1080
- Wide-viewing angle 178°(H),178°(V)
- LCD blacking defect free (Hi-Tni 110°C)



DLD4901-L
49" Outdoor Digital Signage

- Sunlight readable (3,500 nits)
- Resolution: 1920 x 1080
- Wide-viewing angle 178°(H),178°(V)
- LCD blacking defect free (Hi-Tni 110°C)

DLD7501-L
75" Outdoor Digital Signage

- Sunlight readable (3,000 nits)
- High resolution: 3840 x 2160
- Local Dimming, LCD blacking defect free (Hi-Tni 110°C)



DLO7501-L
75" Outdoor Digital Signage

- Sunlight readable (3,000 nits)
- High resolution: 3840 x 2160
- Local Dimming, LCD blacking defect free (Hi-Tni 110°C)
- IP65 front waterproof
- Intel® Skylake-U Series motherboard inside



- DLD2158-U**
21.5" Full HD Industrial LCD
- Sunlight readable (1,600 nits)
 - Resolution: 1920 x 1080
 - Wide-viewing angle 178°(H),178°(V)
 - LCD blacking defect free (Hi-Tni 110°C)



- SSD2203-Y**
22" Square Screen Digital Signage System
- High brightness (500 nits)
 - Resolution: 1920 x 1920 (1:1)



- DLD5500-L**
55" Outdoor Digital Signage
- Sunlight readable (2,500 nits)
 - High resolution: 1920 x 1080
 - Wide-viewing angle 178°(H),178°(V)
 - LCD blacking defect free (Hi-Tni 110°C)



- SSD3705-Y**
33.2" Square Screen Digital Signage System
- High brightness (1,000 nits)
 - Resolution: 1920 x 1920 (1:1)


- SLD2425-E**
24" Full HD Industrial LCD
- Sunlight readable (1,000 nits)
 - Resolution: 1920 x 1080
 - Wide-viewing angle 178°(H) 178°(V)

- SSD3325-Y**
33.2" Square Screen Digital Signage System
- High brightness (1,000 nits)
 - Resolution: 1920 x 1920 (1:1)

- DLD6501-B**
65" Outdoor Digital Signage
- Sunlight readable (3,000 nits)
 - High resolution: 3840 x 2160
 - Wide-viewing angle 178°(H) 178°(V)

0635-T

6.22" TFT LCD, 1000 nits LED Backlight , 1024x250

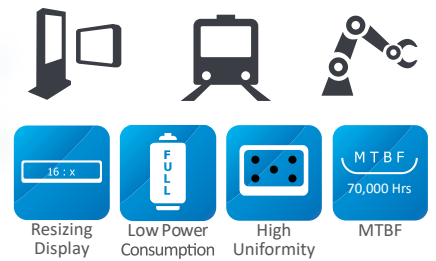

Key Features

- Resizing LCD
- Ultra Wide Screen (16 : 4)
- LED Backlight
- Brightness 1000 nits
- Low Power Consumption
- High Uniformity

Specifications

	SSF0635-T	SSH0635-T
Description	6.22" TFT LCD, 1000 nits LED backlight,1024x250	
Screen size	6.22"	
Display area (mm)	153.6 x 37.5 mm	
Brightness	1000 cd/m2	
Resolution	1024x250	
Aspect ratio	16 : 4	
Contrast ratio	800 : 1	
Pixel pitch (mm)	0.150(H) x 0.150(V)	
Pixel per inch (PPI)	169	
Viewing angle	150°(H),145°(V)	
Color saturation (NTSC)	54%	
Display colors	16.7M	
Response time (Typical)	20ms	
Video interface	LVDS	VGA, DVI-D, HDMI
Input power	DC 12V	
Power consumption	1.6W, (3.2W with AD board)	
Dimensions (mm)	165.75(H) x 55(V) x 3.85(T)	
Bezel size (U/B/L/R)	11/6.5/7.23/4.92 mm	
Weight (Net)	0.09kg	
Mounting		
OSD key		4 keys (Power switch, menu, +, -)
OSD control		Brightness, color, contrast, H/V position... etc
Operating temperature	0 °C ~ 50 °C	
Storage temperature	-20 °C ~ 60 °C	
Product approval		


Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF0635-TNN-A11	6.22",1000nits,1024x250,LID on LCM,10in1,V1
SSH0635-TNN-Q11	6.22",1000nits,1024x250,LID on LCM,AD8891G-DH,DC12V,10in1,V1

1393-A

13.9" Resizing LCD, 600 nits LED backlight, 1280x398

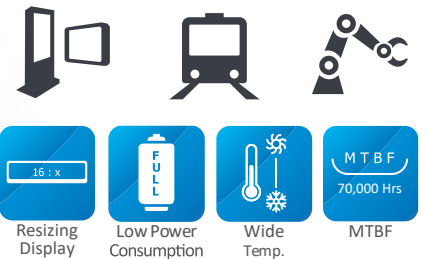

Key Features

- 13.9" Resizing LCD
- Stretched Display (aspect ratio of 16 : 5)
- Brightness Of 600 nits
- Resolutions Of 1280 x 398
- Low Power Consumption
- BL MTBF: 70,000 hours

Specifications

	SSF1393-A	SSH1393-A	SSD1393-A
Description	13.9" Resizing LCD, 600 nits LED backlight, 1280x398		
Screen size	13.9"		
Display area (mm)	337.92(H) x 105.14(V)		
Brightness	600 cd/m ²		
Resolution	1280x398		
Aspect ratio	16:5		
Contrast ratio	700:1		
Pixel pitch (mm)	0.264 (H) x 0.264 (V)		
Pixel per inch (PPI)	96		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	83%		
Display colors	16.7M		
Response time (Typical)	30ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	19W	21W	
Dimensions (mm)	358.5(H)x130(V)x18(T)	497(H)x 54.4(V) x 13.76(T)	360.9(H)x132.5(V)x48.6(T)
Bezel size (U/B/L/R)	12.05/10.14/8.45/8.45		13.3/11.4/9.7/9.7
Weight (Net)	0.7kg	0.9kg	1.5kg
Mounting			VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1393-ANN-A01	13.9", 600nits, 1280x398, LID on module, 10 in 1, V01
SSH1393-ANN-I01	13.9", 600nits, 1280x398, LID on module, AD6038GD, DC12V, 5 in 1, V01
SSD1393-ANB-I01	13.9", 600nits, 1280x398, LID on module, AD6038GD, O/B, DC12V, 5 in 1, V01



1505-E

15" Resizing LCD, 1000 nits LED backlight, 1280x242



Sunlight Readable



Resizing Display



Low Power Consumption



MTBF

70,000 Hrs



Key Features

- 15" Resizing LCD
- Stretched Display (aspect ratio of 16 : 3)
- Sunlight Readable, High Brightness (1,000 nits)
- Resolutions: 1280 x 242
- Low Power Consumption
- Slim Bezel
- BL MTBF: 70,000 hours

Specifications

	SSF1505-E	SSH1505-E	SSD1505-E
Description	15" Resizing LCD, 1000 nits LED backlight, 1280x242		
Screen size	15"		
Display area (mm)	376.3(H) x 71.2(V)		
Brightness	1000 cd/m ²		
Resolution	1280x242		
Aspect ratio	16:3		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.294 (H) x 0.294 (V)		
Pixel per inch (PPI)	86		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	9W	12W	
Dimensions (mm)		396(H)x94.2(V)x12.2(T)	410(H)x108.2(V)x39.3(T)
Bezel size (U/B/L/R)		9.6/9.6/7.9/7.9	17.5/17.5/15.9/15.9
Weight (Net)	0.8kg	1kg	1.25kg
Mounting			VESA 75x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1505-ENN-A11	15", 1000nits, 1280x242, LID15A, V02
SSH1505-ENN-Q11	15", 1000nits, 1280x242, LID15A, AD8891G-D, DC12V, V2
SSD1505-ENB-Q11	15", 1000ints, 1280x242, LID15A, AD8891G-DH, O/B, DC 12V, V2



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

1515-E

15.9" Resizing LCD, 1000 nits LED backlight, 1280x512




Sunlight Readable



Resizing Display



Low Power Consumption



MTBF



Key Features

- 15.9" Resizing LCD
- Stretched Display (aspect ratio of 16:6.4)
- Sunlight Readable, High Brightness (1,000 nits)
- Resolutions: 1280 x 512
- Low Power Consumption
- Slim Bezel
- BL MTBF: 70,000 hours

Specifications

	SSF1515-E	SSH1515-E	SSD1515-E
Description	15.9" Resizing LCD, 1000 nits LED backlight, 1280x512		
Screen size	15.9"		
Display area (mm)	376.3(H) x 150.5(V)		
Brightness	1000 cd/m ²		
Resolution	1280x512		
Aspect ratio	16:6.4		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.294 (H) x 0.294 (V)		
Pixel per inch (PPI)	86		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	12W	15W	
Dimensions (mm)	396(H)x173.6(V)x12.1(T)		398.4(H)x176.2(V)x52.7(T)
Bezel size (U/B/L/R)	9.6/9.6/7.9/7.9		10.85/10.85/9.05/9.05
Weight (Net)	1kg	1.2kg	2.5kg
Mounting			VESA 75x75, 100x100
OSD key			4 keys (Power switch, menu, +, -)
OSD control			Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1515-ENN-A11	15.9", 1000nits, 1280x512, LID15A, V02(5 in 1)
SSH1515-ENN-Q11	15.9", 1000nits, 1280x512, LID15A, AD8891GD, DC 12V, V02(5 in 1)
SSD1515-ENB-Q11	15.9", 1000nits, 1280x512, LID15A, AD8891GD, O/B, DC 12V, V02



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenal BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

1624-B

16.3" LCD, 350nits, LED backlight, 1366x238



Resizing Display



Low Power Consumption



High Color Contrast



MTBF

Key Features

- Resizing LCD
- Ultra Wide Screen 16:2.8
- LED Backlight
- Brightness 350nits
- Low Power Consumption
- BL MTBF: 100,000 hours



Specifications

	SSF1624-B	SSH1624-B	SSD1624-B
Description	16.3" TFT LCD, 350nits LED backlight , 1366x238		
Screen size	16.3"		
Display area (mm)	409.800(H) x 71.400(V)		
Brightness	350 cd/m2		
Resolution	1366x238		
Aspect ratio	16 : 2.8		
Contrast ratio	1000 : 1		
Pixel pitch (mm)	0.300(H) x 0.300(V)		
Pixel per inch (PPI)	84		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	16ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	7.2W	8.8W	
Dimensions (mm)		431.8(H) x 95.8(V) x 15.1(T)	436.3(H) x100.2(V) x 43(T)
Bezel size (U/B/L/R)		12.1/12.4/11/11	14.4/14.4/13.25/13.25
Weight (Net)	0.5kg	0.7kg	1.3kg
Mounting			VESA 50x50, 388.6x80
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.




Ordering Information

SSF1624-BNN-A01	16.3",350nits,1366x238,LID16C,10in1,V1
SSH1624-BNN-Q01	16.3",350nits,1366x238,AD8891GDH w/LID,DC12V,5in1,V1
SSD1624-BNB-Q01	16.3",350nits,1366x238,AD8891GDH w/LID,DC12V,2in1,V1



1725-B

17.2" LCD, 1000nits, LED backlight, 1366x510



Key Features

- Resizing LCD
- Ultra Wide Screen 16:6
- LED Backlight
- Brightness 1000nits
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF1725-B	SSH1725-B	SSD1725-B
Description	17.2" TFT LCD, 1000nits LED backlight , 1366x510		
Screen size	17.2"		
Display area (mm)	409.8(H) x 153(V)		
Brightness	1000 cd/m2		
Resolution	1366x510		
Aspect ratio	16 : 6		
Contrast ratio	850 : 1		
Pixel pitch (mm)	0.300(H) x 0.300(V)		
Pixel per inch (PPI)	84		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	16ms		
Video interface	LVDS	DVI-I, HDMI, DP	
Input power		DC12V	
Power consumption	16.7W	17.4W	
Dimensions (mm)		430.3(H)x178.4(V)x14(T)	432.9(H)x181.1(V)x40(T)
Bezel size (U/B/L/R)		12.7/12.7/10.25/10.25	14/14/11.6/11.5
Weight (Net)	0.8Kg	1Kg	2.3Kg
Mounting			N/A
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF1725-BNN-A01	17.2",1000nits,1366x510,LID17C,5in1,V1
SSH1725-BNN-Q01	17.2",1000nits,1366x510,LID17C,AD8891DHP,DC12V,5in1,V1
SSD1725-BNB-Q01	17.2",1000nits,1366x510,LID17C,AD8891DHP,O/B,DC12V,3in1,V1



1875-B(new)

18.7" Resizing LCD, 1000 nits LED backlight, 1920x146, MaxRGB

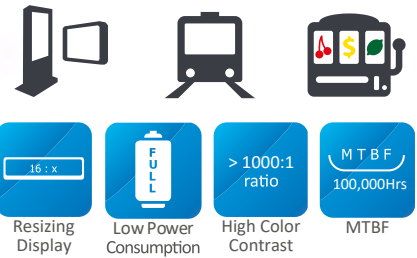

Key Features

- Resizing LCD
- Ultra-Wide Screen (16: 1.2)
- High Brightness 1000 nit
- High Color Saturation
- Wide Viewing Angle 178°(H)~ 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF1875-B	SSH1875-B	SSD1875-B
Description	18.7" Resizing LCD, 1000nits LED backlight, MaxRGB, 1920x146		
Screen size	18.7"		
Display area (mm)	476.06(H) x 36.2(V)		
Brightness	1000cd/m2		
Resolution	1920x146		
Aspect ratio	16 : 1.2		
Contrast ratio	1200 : 1		
Pixel pitch (mm)	0.248(H) x 0.248(V)		
Pixel per inch (PPI)	103		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	92%		
Display colors	16.7M		
Response time (Typical)	20ms		
Video interface	LVDS	DP	
Input power		DC 12V	
Power consumption	8W	9.7W	
Dimensions (mm)	497(H) x 54.4(V) x 13.76(T)		499.6(H) x54.3(V) x 31.8(T)
Bezel size (U/B/L/R)	10.45/7.649/10.468/10.468		10.45/7.65/11.77/11.77
Weight (Net)	0.8kg		1.6kg
Mounting			N/A
OSD key	4 keys (Power switch, menu, +, -)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1875-BNW-A11	18.7",1000nits,1920x146,MaxRGB,LID18C,10in1,V1
SSH1875-BNW-Q11	18.7",1000nits,1920x146,MaxRGB,AD8891P w/LID,DC12V,10in1,V1
SSD1875-BNW-Q11	18.7",1000nits,1920x146,MaxRGB,AD8891P w/LID,O/B,DC12V,5in1,V1



1916-B(new)

19.1" Resizing LCD, 1200nits, LED backlight, 1920 x 388, ultra-wide



Key Features

- Resizing LCD
- Ultra Wide Screen 16:3.2
- LED Backlight
- Brightness 1200nits
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF1916-B	SSH1916-B	SSD1916-B
Description	19.1" Resizing LCD, 1200nits LED backlight , 1920 x 388		
Screen size	19.1"		
Display area (mm)	476.064(H) x 96.204(V)		
Brightness	1200cd/m2		
Resolution	1920x388		
Aspect ratio	16 : 3.2		
Contrast ratio	1500 : 1		
Pixel pitch (mm)	0.24795(H) x 0.24795(V)		
Pixel per inch (PPI)	103		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	20ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	13W	15.4W	
Dimensions (mm)	497.60(H) x 121.30(V) x 16.55(T)		508.01(H) x132.00(V) x 47.05(T)
Bezel size (U/B/L/R)	12.548/12.548/10.768/10.768		17.898/17.898/15.973/15.973
Weight (Net)	0.74kg		2.7kg
Mounting			VESA 100x100, 200x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1916-BNN-A11	19.1",1200nits,1920x388,LID19C,5in1,V1
SSH1916-BNN-Q11	19.1",1200nits,1920x388,AD8891GDH w/LID,DC12V,5in1,V1
SSD1916-BNB-Q11	19.1",1200nits,1920x388,AD8891GDH w/LID,O/B,DC12V,V1

1945-B(new)

19.4" LCD, 1000 nits LED backlight, MaxRGB, 1920x536



Resizing Display



Low Power Consumption



High Color Contrast



MTBF



Key Features

- Ultra-Wide Screen (16 : 4.5)
- High Brightness 1000 nits
- High Color Saturation
- Wide Viewing Angle 178°(H)~ 178°(V)
- Wide Temperature (-20°C~+70°C)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF1945-B	SSH1945-B	SSD1945-B
Description	19.4" LCD, 1000 nits LED backlight, MaxRGB, 1920x536		
Screen size	19.4"		
Display area (mm)	476.064(H) x 132.901(V)		
Brightness	1000cd/m2		
Resolution	1920x536		
Aspect ratio	16 : 4.5		
Contrast ratio	1300 : 1		
Pixel pitch (mm)	0.248(H) x 0.248(V)		
Pixel per inch (PPI)	103		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	91%		
Display colors	16.7M		
Response time (Typical)	20ms		
Video interface	LVDS	DP	
Input power		DC 12V	
Power consumption	22W	23.9W	
Dimensions (mm)	497(H) x 149.8(V) x 13.31(T)		499.6(H) x152.3(V) x 31.8(T)
Bezel size (U/B/L/R)	11/5.719/10.468/10.468		12.38/7.02/11.77/11.77
Weight (Net)	0.92kg	1.102kg	1.9kg
Mounting			VESA132x480
OSD key			4 keys (Power switch, menu, +, -)
OSD control			Brightness, color, contrast, H/V position... etc
Operating temperature	-20°C ~ +70°C		
Storage temperature	-30°C ~ +80°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1945-BNW-A11	19.4",1000nits,1920x536,T2070,MaxRGB,LID19C,10in1,V1
SSH1945-BNW-Q11	19.4",1000nits,1920x536,T2070,MaxRGB,AD8891P w/LID,DC12V,10in1,V1
SSD1945-BNW-Q11	19.4",1000nits,1920x536,T2070,MaxRGB,AD8891P w/LID,O/B,DC12V,10in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



Squarepixel series are designed as an advertising solution, great for advertising and announcements at retail stores, shopping malls, casinos, hotels, stadiums, music concerts, exhibition halls and many more.

Squarepixel
Square LCD



22~33.2" Squarepixel

Aspect Ratio 1:1


Slim Bezel

Unique

23.6" SDM Display Solution

Circle LED lighting

SDM Ready display



23.6" Intel® SDM Display Solution Ready for all-in-one Signage

- Supports Intel® SDM-S & L form factor
- High brightness (1,000 nits)



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2125-A

21.2" Resizing LCD, 1000 nits LED backlight, 1920x316



Sunlight
Readable



Resizing
Display



Low Power
Consumption



MTBF
100,000 Hrs



Key Features

- 21.2" Resizing LCD
- Ultra Wide Screen (Aspect Ratio of 16:2.6)
- Sunlight Readable, High Brightness (1,000 nits)
- Resolutions: 1920 x 316
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF2125-A	SSH2125-A	SSD2125-A
Description	21.2" Resizing LCD, 1000 nits LED backlight, 1920x316		
Screen size	21.2"		
Display area (mm)	531.36(H) x 87.4(V)		
Brightness	1000 cd/m ²		
Resolution	1920x316		
Aspect ratio	16:2.6		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.276 (H) x 0.276 (V)		
Pixel per inch (PPI)	91		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D, DP	
Input power		DC 12V	
Power consumption	17W	20W	
Dimensions (mm)		555.9(H)x116.91(V)x17.1(T)	558.5(H)x119.5(V)x46.1(T)
Bezel size (U/B/L/R)		10.1/15.2/10.3/10.3	11.4/16.5/11.6/11.6
Weight (Net)	1kg	1.3kg	2.1kg
Mounting			VESA 150x30
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2125-ANN-A01	21.28", 1000nits, 1920x316, LID21A, 5in1,V1
SSH2125-ANN-I01	21.28", 1000nits, 1920x316, AD6038GDP+LID, DC 12V,5in1,V1
SSD2125-ANB-I01	21.28", 1000nits, 1920x316, AD6038GDP+LID, O/B, DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2203-Y

22" TFT LCD, 500 nits, LED Backlight, 1920x1920



Sunlight Readable



Low Power Consumption



MTBF

100,000 Hrs

Key Features

- 22" Square-Shaped LCD
- Square Display (Aspect Ratio of 1:1)
- Brightness (500nits)
- Resolution: 1920 x 1920
- Slim Bezel
- Wide View Angle of 178° (H), 178° (V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF2203-Y	SSH2203-Y	SSD2203-Y
Description	22" TFT LCD, 500nits LED backlight, 1920x1920		
Screen size	22"		
Display area (mm)	394.56(H) x 394.56(V)		
Brightness	500 cd/m ²		
Resolution	1920x1920		
Aspect ratio	1:1		
Contrast ratio	650:1		
Pixel pitch (mm)	0.2055(H) x 0.2055(V)		
Pixel per inch (PPI)	123		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	Dual-DVI, HDMI, DP	
Input power		DC 12V	
Power consumption	29.6W	35.8W	
Dimensions (mm)		409.56(H)x409.56(V)x12.6(T)	412.4(H)x412.4(V)x51.6(T)
Bezel size (U/B/L/R)		5.5/5.5/5.5/5.5	6.9/6.9/6.9/6.9
Weight (Net)		2.5kg	4.5kg
Mounting			VESA 200x200
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2203-YNN-A01	22",500nits,1920x1920,LID22C,5in1,V1
SSH2203-YNN-M01	22",500nits,1920x1920,LID22C,AD9131DHP,DC12V,5in1,V1
SSD2203-YNB-M01	22",500nits,1920x1920,LID22C,AD9131DHP,O/B,DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2368-C

23.6" TFT LCD, 1600 nits LED backlight, 1280x1280



Sunlight Readable



Resizing Display



Low Power Consumption



MTBF



Key Features

- 23.6" Circle Display
- High Resolution 1280 x 1280
- High Brightness 1600nits
- Aspect Ratio 1:1
- LED Backlight
- Low Power Consumption

Specifications

	SSF2368-C	SSH2368-C	SSD2368-C
Description	23.6" TFT LCD, 1600 nits LED backlight, 1280x1280		
Screen size	23.6"		
Display area (mm)	599.424(H) x 599.424(V)		
Brightness	1600 cd/m2		
Resolution	1280x1280		
Aspect ratio	1 : 1		
Contrast ratio	700 : 1		
Pixel pitch (mm)	0.468(H) x 0.468(V)		
Pixel per inch (PPI)	76		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	14ms		
Video interface	LVDS		HDMI, DP
Input power			DC 24V
Power consumption	82.6W	85.6W	
Dimensions (mm)	657(H)x657(V)x28.65(T)		659.6 H)x659.6 (V)x66.02(T)
Bezel size (U/B/L/R)	28.79/28.79/28.79/28.79		30.09/30.09/30.09/30.09
Weight (Net)	4.8 kg	5.1 kg	8.3 kg
Mounting			100x100 , 200x100
OSD key			4 keys (Power switch, menu, +, -)
OSD control			Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2368-ANN-A01	21.28", 1000nits, 1920x316, LID21A, 5in1,V1
SSH2368-ANN-I01	21.28", 1000nits, 1920x316, AD6038GDP+LID, DC 12V,5in1,V1
SSD2368-ANB-I01	21.28", 1000nits, 1920x316, AD6038GDP+LID, O/B, DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2405-M(new)

24" TFT LCD, LED Backlight 1000 nits (1920x360)



Sunlight
Readable



Low Power
Consumption



MTBF
100,000 Hrs

Key Features

- 24" Resizing LCD
- Ultra-Wide Screen (16 : 3)
- High Brightness 1000 nits
- LED Backlight
- High Color Saturation
- Wide Viewing Angle 178°(H)~ 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours



Specifications

	SSF2405-M	SSH2405-M	SSD2405-M
Description	24" Resizing LCD, 1000 nits LED backlight, MaxRGB, 1920x360		
Screen size	24"		
Display area (mm)	597.6(H) x 112.05(V)		
Brightness	1000 cd/m2		
Resolution	1920x360		
Aspect ratio	16: 3		
Contrast ratio	5400:1		
Pixel pitch (mm)	0.31125(H) x 0.31125(V)		
Pixel per inch (PPI)	81		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	88%		
Display colors	16.7M		
Response time (Typical)	20ms		
Video interface	LVDS	HDMI, DP	
Input power		DC 12V	
Power consumption	24W	27W	
Dimensions (mm)		615.3(H) x 139.35(V) x 17.15(T)	617.9 (H)x 141.95(V) x 44.15(T)
Bezel size (U/B/L/R)		14.9/12.4/8.85/8.85	16.2/13.7/10.15/10.15
Weight (Net)	1.1kg	1.3kg	2.6kg
Mounting			VESA 75x75, 250x75
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2405-MNW-A11	24",1000nits,1920x360,MaxRGB,HVN,LID24C,DC12V,10in1,V1
SSH2405-MNW-T11	24",1000nits,1920x360,MaxRGB,HVN,AD68862HP,LID24C,DC12V,10in1,V1
SSD2405-MNW-T11	24",1000nits,1920x360,MaxRGB,HVN,AD68862HP,LID24C,O/B,DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2445-M(new)

24.4" Resizing LCD, 800 nits LED backlight, MaxRGB (1920x540)



Sunlight
Readable



Low Power
Consumption



MTBF
100,000 Hrs

Key Features

- 24.4" Resizing LCD
- Ultra-Wide Screen (16: 4.5)
- High Brightness 800 nits
- LED Backlight
- High Color Saturation
- Wide Viewing Angle 178°(H)~ 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours



Specifications

	SSF2445-M	SSH2445-M	SSD2245-M
Description	24.4" Resizing LCD, 800 nits LED backlight, MaxRGB, 1920x540		
Screen size	24.4"		
Display area (mm)	597.6(H) x 168.075(V)		
Brightness	800 cd/m2		
Resolution	1920x540		
Aspect ratio	16: 4.5		
Contrast ratio	4000:1		
Pixel pitch (mm)	0.31125(H) x 0.31125(V)		
Pixel per inch (PPI)	81		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	90%		
Display colors	16.7M		
Response time (Typical)	20ms		
Video interface	LVDS	HDMI, DP	
Input power		DC 12V	
Power consumption	28.7W	31.7W	
Dimensions (mm)	623.4(H) x 198.9(V) x 16.95(T)		626(H) x 201.5(V) x 44(T)
Bezel size (U/B/L/R)	15.4/15.4/12.9/12.9		16.7/16.7/14.2/14.2
Weight (Net)	2.5kg	2.7kg	3.5kg
Mounting			VESA 75x75, 250x75
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2445-MNW-A11	24.4",800nits,1920x540,MaxRGB,HVN,LID24C,10in1,V1
SSH2445-MNW-T11	24.4",800nits,1920x540,MaxRGB,HVN,LID24C,AD68862HP,DC12V,10in1,V1
SSD2445-MNW-T11	24.4",800nits,1920x540,MaxRGB,HVN,LID24C,AD68862HP,O/B,DC12V,5in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2805-A

28" Resizing LCD, 1000nits LED Backlight, 1920x360

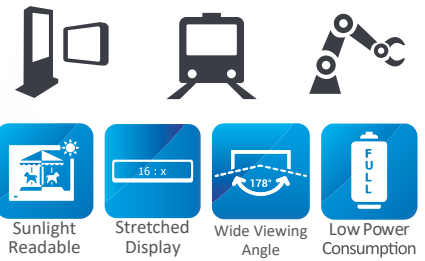

Key Features

- 28" Resizing LCD
- Ultra Wide Screen 16:3
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF2805-A	SSH2805-A	SSD2805-A
Description	28" TFT LCD, 1000nits LED Backlight, 1920x360		
Screen size	28"		
Display area (mm)	698.400(H) x 196.425(V)		
Brightness	1000 cd/m ²		
Resolution	1920x360		
Aspect ratio	16:3		
Contrast ratio	4000:1		
Pixel pitch (mm)	0.3645(H) x 0.3645 (V)		
Pixel per inch (PPI)	70		
Viewing angle	178°(H), 178°(V)		
Color saturation (NTSC)	88%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC12V	
Power consumption	22W	25W	
Dimensions (mm)		732(H)x 165(V)x 17.3(T)	737(H)x 170(V)x 57.9 (T)
Bezel size (U/B/L/R)		14.5/14.5/14/14	
Weight (Net)	2.4 kg	2.6 kg	5.4kg
Mounting			VEESA 75x75 ,400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF2805-ANN-A11	28", 1000nits, 1920x360, LID28C, 4in1, V1
SSH2805-ANN-Q11	28", 1000nits, 1920x360, LID28C, AD8891GDH, DC12V, 4in1, V1
SSD2805-ANB-Q11	28", 1000nits, 1920x360, LID28C, AD8891GDH, O/B, DC12V, 3in1, V1



2861-Y

28.6" TFT LCD, 3200nits LED Backlight, 1920x540

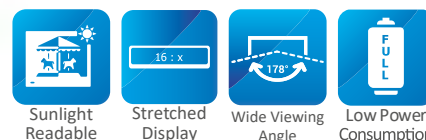

Key Features

- Ultra Wide Screen 16:4.5
- High Brightness 3200 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blacking Defect Free(Hi-Tni 110 °C)
- BL MTBF: 100,000 hours

Specifications

	SSF2861-Y	SSH2861-Y	SSD2861-Y
Description	28.6" TFT LCD, 3200nits LED Backlight, 1920x540		
Screen size	28.6"		
Display area (mm)	698.400(H) x 196.425(V)		
Brightness	3200 cd/m ²		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	6000:1		
Pixel pitch (mm)	0.3637(H) x 0.3637 (V)		
Pixel per inch (PPI)	70		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	84%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI-I, HDMI, DP	
Input power		DC24V	
Power consumption	55W	60W	
Dimensions (mm)		731.46(H)x 229.49(V)x 20.34 (T)	734.5(H)x 232.5(V)x 60.1 (T)
Bezel size (U/B/L/R)		16.533/16.533/16.530/16.530	18/18/18/18
Weight (Net)	2.6 kg	2.8 kg	5.6 kg
Mounting			VESA 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	-20 °C ~ 60 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC


Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2861-YNN-A11	28.6",3200nits,1920x540.HTni,LID29C,5in1,V1
SSH2861-YNN-Q11	28.6",3200nits,1920x540.HTni,LID29C,AD8891DHP.DC24V,5in1,V1
SSD2861-YNB-Q11	28.6",3200nits,1920x540,HTni,LID29C,AD8891DHP,O/B,DC24V,3in1,V1

2869-Y

28.6" TFT LCD, 1800 nits LED Backlight, 1920x540

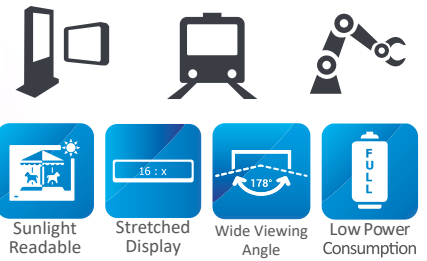

Key Features

- Ultra Wide Screen 16:4.5
- High Brightness 1800 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blacking Defect Free(Hi-Tni 110 °C)
- BL MTBF: 100,000 hours

Specifications

	SSF2869-Y	SSH2869-Y	SSD2869-Y
Description	28.6" TFT LCD, 1800 nits LED Backlight, 1920x540		
Screen size	28.6"		
Display area (mm)	698.400(H) x 196.425(V)		
Brightness	1800 cd/m ²		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	6300:1		
Pixel pitch (mm)	0.3637(H) x 0.3637 (V)		
Pixel per inch (PPI)	70		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	84%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI-I, HDMI, DP	
Input power		DC12V	
Power consumption	34W	39W	
Dimensions (mm)		731.46(H)x 229.49(V)x 20.34 (T)	734.5(H)x 232.5(V)x 60.1 (T)
Bezel size (U/B/L/R)		16.533/16.533/16.530/16.530	18/18/18/18
Weight (Net)	2.6kg	2.8 kg	5.6kg
Mounting			VESA 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	-20 °C ~ 60 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2869-YNN-A11	28.6",1800nits,1920x540,HTni,LID29C,5in1,V1
SSH2869-YNN-Q11	28.6",1800nits,1920x540,HTni,LID29C,AD8891DHP,DC12V,5in1,V1
SSD2869-YNB-Q11	28.6",1800nits,1920x540,HTni,LID29C,AD8891DHP,O/B,DV12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2940-Y(New)

29.4" TFT LCD, 2000 nits LED Backlight, 1920x720



Sunlight Readable



Aspect Ratio 1:1



Low Power Consumption



MTBF 100,000 Hrs



Key Features

- Ultra Wide Screen 16:6
- High Brightness 2000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blackening Defect Free(Hi-Tni 110 °C)
- BL MTBF: 100,000 hours

Specifications

	SSF2940-Y	SSH2940-Y	SSD2940-Y
Description	29.4" TFT LCD, 2000nits LED Backlight, 1920x720		
Screen size	29.4"		
Display area (mm)	698.4 (H) x 261.9 (V)		
Brightness	2000 cd/m ²		
Resolution	1920 x 720		
Aspect ratio	16 : 6		
Contrast ratio	6100:1		
Pixel pitch (mm)	0.3637(H) x 0.3637(V)		
Pixel per inch (PPI)	70		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	85%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	HDMI, DP	
Input power		DC 12V	
Power consumption	60W	64W	
Dimensions (mm)		735.4(H)x 302.6(V)x 17.9(T)	738(H)x 305.2(V) x 58.9(T)
Bezel size (U/B/L/R)		18/22.7/18.5/18.5	
Weight (Net)	3.0kg	3.2kg	7.5kg
Mounting		VESA 75x75 400x75	
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	-20°C ~ 60°C		
Storage temperature	-20°C ~ 60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2940-YNN-A11	29.4",2000nits,1920x720,T2060,HTni,LID29C,5in1,V1
SSH2940-YNN-T11	29.4",2000nits,1920x720,T2060,HTni,LID29C,AD68862HP,DC12V,5in1,V1
SSD2940-YNB-T11	29.4",2000nits,1920x720,T2060,HTni,LID29C,AD68862HP,O/B,DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

2945-A(New)

29.4" Resizing LCD, 1000 nits LED backlight, 1920 x 720



Key Features

- 29.4" Resizing LCD
- Ultra-Wide Screen (16 : 6)
- High Brightness 1000 nits
- LED Backlight
- Wide Viewing Angle 178°(H)~ 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF2945-A	SSH2945-A	SSD2945-A
Description	29.4" TFT LCD, 1000nits LED Backlight, 1920x720		
Screen size	29.4"		
Display area (mm)	698.4 (H) x261.9 (V)		
Brightness	1000 cd/m ²		
Resolution	1920 x720		
Aspect ratio	16 : 6		
Contrast ratio	5400:1		
Pixel pitch (mm)	0.36375(H) x 0.36375(V)		
Pixel per inch (PPI)	70		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	87%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	HDMI, DP	
Input power		DC 12V	
Power consumption	37W	40W	
Dimensions (mm)		735.4(H)x 302.6(V)x 20.9(T)	738(H)x 305.2(V) x 61.9(T)
Bezel size (U/B/L/R)		22.7/18/18.5/18.5	
Weight (Net)	3.0kg	3.2kg	6.8kg
Mounting			VESA 75x75, 400x75
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ 50°C		
Storage temperature	-20°C ~ 60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2945-ANN-A11	29.4",2000nits,1920x720,T2060,HTni,LID29C,2in1,V1
SSH2945-ANN-T11	29.4",2000nits,1920x720,T2060,HTni,LID29C,AD68862HP,DC12V,2in1,V1
SSD2945-ANB-T11	29.4",2000nits,1920x720,T2060,HTni,LID29C,AD68862HP,O/B,DC12V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3325-Y

33.2" TFT LCD, LED Backlight 1000 nits, FHD 1920x1920



Sunlight Readable



Wide Viewing Angle



MTBF

Key Features

- 33.2" Square-Shaped LCD
- Square Display (aspect ratio of 1:1)
- Sunlight Readable, High Brightness (1,000nits)
- Resolution: 1920 x 1920
- Slim Bezel
- Wide View Angle Of 178° (H), 178° (V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF3325-Y	SSH3325-Y	SSD3325-Y
Description	33.2" TFT LCD, LED Backlight 1000 nits, Square display (1920x1920)		
Screen size	33.2"		
Display area (mm)	596.16 (H) x596.16 (V)		
Brightness	1000 cd/m ²		
Resolution	1920x1920		
Aspect ratio	1:1		
Contrast ratio	600:1		
Pixel pitch (mm)	0.3105(H) x 0.3105(V)		
Pixel per inch (PPI)	82		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI, HDMI, DP	
Input power		AC100~240V	
Power consumption	56W	60W	
Dimensions (mm)		612.96(H)x612.96(V)x12.5(T)	615.8(H)x615.8(V)x62.9(T)
Bezel size (U/B/L/R)		5.5/5.5/5.5/5.5	6.9/6.9/6.9/6.9
Weight (Net)		5.5kg	11.5kg
Mounting			VESA 400x200, 400x300
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3325-YNN-A01	33.2",1000nits,1920x1920.LID33C,3in1,V1
SSH3325-YNN-M01	33.2",1000nits,1920x1920.LID33C,AD9131DHP.AC100~240V,3in1,V1
SSD3325-YNB-M01	33.2",1000nits,1920x1920.LID33C,AD9131DHP.O/B,AC100~240V,1in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3525-I

35.2" Resizing LCD, 1000 nits LED backlight, 1850x2160



TAXI



Sunlight
Readable



Wide Viewing
Angle



MTBF



Key Features

- Resizing LCD
- Square Screen (7.7 : 9)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF3525-I	SSH3525-I	SSD3525-I
Description	35.2" Resizing LCD, 1000 nits LED backlight, 1850x2160		
Screen size	35.2"		
Display area (mm)	582.75(H) x 680.4(V)		
Brightness	1000 cd/m ²		
Resolution	1850 x 2160		
Aspect ratio	7.7:9		
Contrast ratio	6400:1		
Pixel pitch (mm)	0.315(H) x 0.315(V)		
Pixel per inch (PPI)	80		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	83%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	HDMI, DP	
Input power		DC 24V	
Power consumption	80W	83W	
Dimensions (mm)	626.5(H)x707.9(V)x25(T)		629(H)x710.4(V)x73.5(T)
Bezel size (U/B/L/R)	12.4/15.1/21.8/21.8		13.7/16.3/23.1/23.1
Weight (Net)	7.78kg	8.08kg	15kg
Mounting			400x200, 400x300
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3525-INU-A11	35.2",1000nits,1850*2160,left,Inn,LID35C,3in1,V1
SSH3525-INU-S11	35.2",1000nits,1850*2160,left,Inn,LID35C,AD68415HHP,DC24V,3in1,V1
SSD3525-INU-S11	35.2",1000nits,1850*2160,left,Inn,LID35C,AD68415HHP,O/B,DC24V,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3565-I

35.6" Resizing LCD, 1000 nits LED backlight, 1900x2160



TAXI



Sunlight Readable



Resizing Display



Wide Viewing Angle



MTBF

100,000 Hrs

Key Features

- Resizing LCD
- Square Screen (8 : 9)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF3565-I	SSH3565-I	SSD3565-I
Description	35.6" Resizing LCD, 1000 nits LED backlight, 1900x2160		
Screen size	35.6"		
Display area (mm)	598.5(H) x 680.4(V)		
Brightness	1000 cd/m ²		
Resolution	1900x2160		
Aspect ratio	8 : 9		
Contrast ratio	7000 : 1		
Pixel pitch (mm)	0.315(H) x 0.315(V)		
Pixel per inch (PPI)	80		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	83%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	HDMI, DP	
Input power		DC24V	
Power consumption	70W	73W	
Dimensions (mm)	626.5(H) x 707.9(V) x 25(T)		629(H) x 710.4(V) x 73.5 (T)
Bezel size (U/B/L/R)	12.4/15.1/14/14		13.7/16.3/15.2/15.2
Weight (Net)	7.78kg	8.08kg	15kg
Mounting			400x200, 400x300
OSD key	5 Keys (Power Switch, Menu, +, Exit, -)		
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3565-INU-A11	35.6",1000nits,1900*2160,right,Inn,LID35C,3in1,V1
SSH3565-INU-S11	35.6",1000nits,1900*2160,right,Inn,LID35C,AD68415HHP,DC24V,3in1,V1
SSD3565-INU-S11	35.6",1000nits,1900*2160,right,Inn,LID35C,AD68415HHP,O/B,DC24V,V1

3585-Y(new)

35.8" TFT LCD, 1000 nits LED Backlight , 1920x532



TAXI



Sunlight Readable



Resizing Display



Wide Viewing Angle



MTBF
100,000 Hrs

MTBF



Key Features

- 35.8" Stretched LCD
- Ultra-Wide Screen (16: 4.4)
- High Brightness 1000 nits
- LED Backlight
- Low Power Consumption
- BL MTBF: 50,000 hours

Specifications

	SSF3585-Y	SSH3585-Y	SSD3585-Y
Description	35.8" TFT LCD, 1000 nits LED backlight, 1920x532		
Screen size	35.8"		
Display area (mm)	878.112(H) x 239.081(V)		
Brightness	1000 cd/m ²		
Resolution	1920x532		
Aspect ratio	16:4.4		
Contrast ratio	4200:1		
Pixel pitch (mm)	0.45735 (H) x 0.4494 (V)		
Pixel per inch (PPI)	55		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI, DP	
Input power	DC 24V		
Power consumption	56W	60W	
Dimensions (mm)	895.51(H) x 265.68(V) x 31.1(T)		898(H) x 268.1(V) x 77.2 (T)
Bezel size (U/B/L/R)	11.9/11.9/7.3/7.3		14.5/14.5/9.9/9.9
Weight (Net)	4.6kg	4.8kg	10.5kg
Mounting	VESA 300x75		
OSD key	4 keys (Power switch, menu, +, -)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3585-YNN-A11	35.8",1000nits,1920x532,LID on LCM,3in1,V1
SSH3585-YNN-J11	35.8",1000nits,1920x532,LID on LCM,AD5827GDHP,DC24V,3in1,V1
SSD3585-YNB-J11	35.8",1000nits,1920x532,LID on LCM,AD5827GDHP,O/B,speaker*2,DC24V,2in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3665-I


36.6" Resizing LCD, 1000 nits LED backlight, 1920x290




TAXI



Sunlight Readable



Resizing Display



Wide Viewing Angle



MTBF

100,000 Hrs



Key Features

- 36.6" Resizing LCD
- (Ultra-Wide Screen 16 : 2.4)
- Sunlight Readable
- High Brightness (1,000 nits)
- Resolutions: 1920 x 290
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF3665-I	SSH3665-I	SSD3665-I
Description	36.6" Resizing LCD, 1000 nits LED backlight, 1920x290		
Screen size	36.6"		
Display area (mm)	919.296(H) x 138.8(V)		
Brightness	1000 cd/m ²		
Resolution	1920x290		
Aspect ratio	16:2.4		
Contrast ratio	7500:1		
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)		
Pixel per inch (PPI)	52		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	82%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	19W	24W	
Dimensions (mm)		960(H)x174.2(V)x15.8(T)	962.8(H)x177(V)x56.2(T)
Bezel size (U/B/L/R)		15.2/15.2/17.9/17.9	16.6/16.6/19.25/19.25
Weight (Net)	3.2kg	3.3kg	6.3kg
Mounting			VESA 75x75, 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3665-INN-A01	36.6", 1000nits, 1920x290, LID36A, 2in1, V1
SSH3665-INN-Q01	36.6", 1000nits, 1920x290, LID36A, AD8891G-DH, DC12V, 2in1, V1
SSD3665-INB-Q01	36.6", 1000nits, 1920x290, LID36A, AD8891G-DH, O/B, DC12V, 2in1, V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3685-I


36.8" Resizing LCD, 1000 nits LED backlight, 1920x358



TAXI



Sunlight Readable



Resizing Display



Wide Viewing Angle



MTBF 100,000 Hrs



Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 2.9)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF3685-I	SSH3685-I	SSD3685-I
Description	36.8" Resizing LCD, 1000 nits LED backlight, 1920x358		
Screen size	36.8"		
Display area (mm)	919.3(H) x 171.4(V)		
Brightness	1000 cd/m ²		
Resolution	1920x358		
Aspect ratio	16:2.9		
Contrast ratio	7600:1		
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)		
Pixel per inch (PPI)	52		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	22W	27W	
Dimensions (mm)		960(H)x207.3(V)x16(T)	962.8(H)x210.1(V)x56.2(T)
Bezel size (U/B/L/R)		15.2/15.2/17.85/17.85	16.6/16.6/19.25/19.25
Weight (Net)	3.5kg	3.8kg	6.3kg
Mounting			VESA 75x75, 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3685-INN-A01	36.8", 1000nits, 1920x358, LID36A, 2in1, V1
SSH3685-INN-Q01	36.8", 1000nits, 1920x358, LID36A, AD8891G-DH, DC12V, 2in1, V1
SSD3685-INB-Q01	36.8", 1000nits, 1920x358, LID36A, AD8891G-DH, O/B, DC12V, 2in1, V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3701-Y

37" LCD, 3000 nits LED backlight, 1920 x 540



TAXI



Sunlight Readable



Resizing Display



Wide Viewing Angle



MTBF



Key Features

- Ultra Wide Screen 16:4.5
- High Brightness 3000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blackening Defect Free(Hi-Tni 110 °C)
- BL MTBF: 100,000 hours

Specifications

	SSF3701-Y	SSH3701-Y	SSD3701-Y
Description	37" LCD, 3000 nits LED backlight, 1920 x 540		
Screen size	37"		
Display area (mm)	904.32(H) x 254.34(V)		
Brightness	3000 cd/m ²		
Resolution	1920x540		
Aspect ratio	16 : 4.5		
Contrast ratio	5000 : 1		
Pixel pitch (mm)	0.47(H) x 0.47(V)		
Pixel per inch (PPI)	54		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	86%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI-I,HDMI,DP	
Input power		DC 24V	
Power consumption	85.2W	91.2W	
Dimensions (mm)		935.5(H)x 287.5(V)x 18.1(T)	938.5(H)x 290.5(V)x 61.8(H)
Bezel size (U/B/L/R)		16.6/16.6/15.6/15.6	
Weight (Net)	4.4 kg	4.7 kg	8.7 kg
Mounting			VESA 400x100
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3701-YNN-A11	37",3000nits,1920x540,HTni,LID37C,5in1,V2
SSH3701-YNN-Q11	37",3000nits,1920x540,HTni,LID37C,AD8891DHP,DC24V,5in1,V2
SSD3701-YNB-Q11	37",3000nits,1920x540,HTni,LID37C,AD8891DHP,O/B,DC24V,3in1,V2



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

3705-Y

37" TFT LCD, 1000 nits LED backlight, 1920x540



TAXI



Sunlight Readable



Stretched Display



MTBF

100,000Hrs



High Color Contrast



Key Features

- Ultra Wide Screen 16:4.5
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- LCD Blackening Defect Free(Hi-Tni 110 °C)
- BL MTBF: 100,000 hours

Specifications

	SSF3705-Y	SSH3705-Y	SSD3705-Y
Description	37" LCD, 1000 nits LED backlight, 1920x540		
Screen size	37"		
Display area (mm)	904.32(H) x 254.34(V)		
Brightness	1000 cd/m ²		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	5600:1		
Pixel pitch (mm)	0.47(H) x 0.47(V)		
Pixel per inch (PPI)	54		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	85%		
Display colors	16.7M		
Response time (Typical)	6.8ms		
Video interface	LVDS	DVI-I , HDMI, DP	
Input power		DC 12V	
Power consumption	71W	77W	
Dimensions (mm)		923.3(H)x 277.1(V) x 30.5(T)	926.8(H)x 280.1(V) x 73.1(T)
Bezel size (U/B/L/R)		11.38/11.38/9.49/9.49	12.9/12.9/11.2/11.2
Weight (Net)	4.7kg	5kg	9.3kg
Mounting			VESA 300x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	-20°C ~ +60°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3705-YNN-A21	37",1000nits,1920x540,HTni,LID37C,5in1,V3
SSH3705-YNN-Q21	37",1000nits,1920x540,HTni,LID37C,AD8891DHP,DC12V,5in1,V3
SSD3705-YNB-Q21	37",1000nits,1920x540,HTni,LID37C,AD8891DHP,O/B,DC12V,3n1,V3

3805-I

37.6" Resizing LCD, 1000 nits LED backlight, 1920x540



TAXI



Sunlight Readable



Resizing Display




Wide Viewing Angle



MTBF
100,000 Hrs

2014

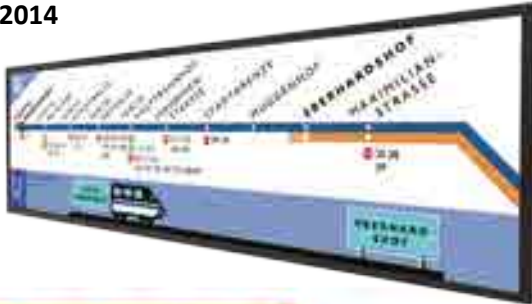

Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 4.5)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF3805-I	SSH3805-I	SSD3805-I
Description	37.6" Resizing LCD, 1000 nits LED backlight, 1920x540		
Screen size	37.6"		
Display area (mm)	919.296(H) x 258.5(V)		
Brightness	1000 cd/m ²		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	8000:1		
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)		
Pixel per inch (PPI)	52		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	82%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	31.4W	36.4W	
Dimensions (mm)		960(H)x302.4(V)x15.8(T)	962.6(H)x304.9(V)x54.2(T)
Bezel size (U/B/L/R)		15.2/23.8/17.9/17.9	16.4/25/19.1/19.1
Weight (Net)	5kg	5.2kg	8.8kg
Mounting			VESA 400x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3805-INN-A21	37.6", 1000nits, 1920x540, LID38A, 2in1, V3
SSH3805-INN-Q21	37.6", 1000nits, 1920x540, LID38A, AD8891G-DH, DC12V, 2in1, V3
SSD3805-INB-Q21	37.6", 1000nits, 1920x540, LID38A, AD8891G-DH, O/B, DC12V, 2in1, V3



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com



WWW.LITEMAX.COM

New Product



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

4215-I

42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160

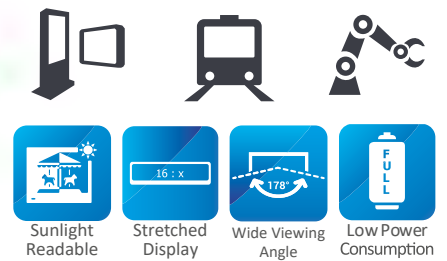

Key Features

- 42.1" Resizing LCD
- Square Display (Aspect Ratio of 8 : 9)
- Sunlight Readable, High Brightness (800 nits)
- Resolutions: 1900 x 2160
- MaxRGB (NTSC 91%)
- Wide View Angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4215-I	SSH4215-I	SSD4215-I
Description	42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160		
Screen size	42.1"		
Display area (mm)	706.8(H) x 803.5 (V)		
Brightness	800 cd/m ²		
Resolution	1900x2160		
Aspect ratio	8:9		
Contrast ratio	6000:1		
Pixel pitch (mm)	0.372 (H) x 0.372 (V)		
Pixel per inch (PPI)	69		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	91%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	DVI, HDMI, DP	
Input power	AC 100~240V		
Power consumption	131W	136W	
Dimensions (mm)	741.3(H)x838(V)x22.4(T)		743.9(H)x840.6(V)x70.8(T)
Bezel size (U/B/L/R)	15/15/15/15		16.3/16.3/16.3/16.3
Weight (Net)	12.4kg		22kg
Mounting	VESA 400x200, 400x300		
OSD key	5 Keys (Power Switch, Menu, +, Exit, -)		
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF4215-INK-A12	42.1"(right),800nits,MaxRGB.T1,1900x2160,LID42A,2in1,V2
SSH4215-INK-M12	42.1"(right),800nits,MaxRGB.1900x2160,T1,LID42A.AD9131DHP,AC100~240V,2in1,V2
SSD4215-INK-M12	42.1"(right),800nits,MaxRGB.1900x2160,T1,LID42A,AD9131DHP,O/B,speaker*2,AC100~240V,V2



4221-Y

42.2" TFT LCD, 2600 nits LED backlight, 1920x480

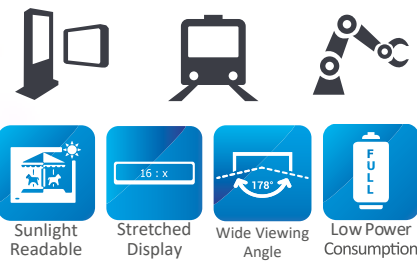

Key Features

- 42.2" Stretched LCD
- Ultra-Wide Screen (16 : 4)
- High Brightness 2600 nits
- LED Backlight
- LCD Blacking Defect Free (Hi-Tni 110 °C)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF4221-Y	SSH4221-Y	SSD4221-Y
Description	42.2" TFT LCD, 3000 nits LED backlight, 1920x480		
Screen size	42.2"		
Display area (mm)	1039.68(H) x 259.92(V)		
Brightness	2600 cd/m ²		
Resolution	1920x480		
Aspect ratio	16 : 4		
Contrast ratio	4600 : 1		
Pixel pitch (mm)	0.54(H) x 0.54(V)		
Pixel per inch (PPI)	47		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	86%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI-I,HDMI,DP	
Input power	DC 24V		
Power consumption	128W	132W	
Dimensions (mm)	1069. 8(H) x 293.92(V) x 23.13 (T)		1072.8(H) x 296.9(V) x 66.1 (T)
Bezel size (U/B/L/R)	17/17/15.06/15.06		18.5/18.5/16.6/16.6
Weight (Net)	4.8 kg	5.0 kg	10.7kg
Mounting	VESA 400x100		
OSD key	4 Keys (Power Switch, Menu, +, -)		
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF4221-YNN-A11	42.2",2600nits,1920x480,HTni,LID42C,5in1,V1
SSH4221-YNN-Q11	42.2",2600nits,1920x480,HTni,LID42C,AD8891DHP,DC24V,5in1,V1
SSD4221-YNB-Q11	42.2",2600nits,1920x480,HTni,LID42C,AD8891DHP,O/B,DC24V,3in1,V1



4225-Y

42.2" TFT LCD, 1000 nits LED backlight, 1920x480

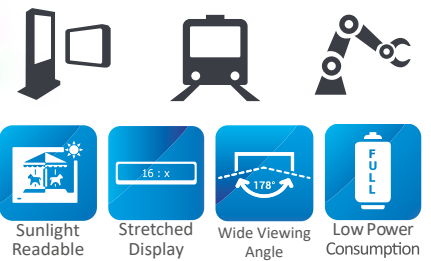

Key Features

- 42.2" Stretched LCD
- Ultra-Wide Screen (16 : 4)
- High Brightness 1000 nits
- LED Backlight
- LCD Blacking Defect Free (Hi-Tni 110 °C)
- Low Power Consumption
- BL MTBF: 50,000 hours

Specifications

	SSF4225-Y	SSH4225-Y	SSD4225-Y
Description	42.2" TFT LCD, 1000 nits LED backlight, 1920x480		
Screen size	42.2"		
Display area (mm)	1039.68(H) x 259.92(V)		
Brightness	1000 cd/m2		
Resolution	1920x480		
Aspect ratio	16 : 4		
Contrast ratio	4200 : 1		
Pixel pitch (mm)	0.54(H) x 0.54(V)		
Pixel per inch (PPI)	47		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	85%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	HDMI, DP	
Input power		DC 24V	
Power consumption	62W	67W	
Dimensions (mm)	1059.48(H) x 283.52(V) x 56.9 (T)		1062.5(H) x 286.5(V) x 84.7 (T)
Bezel size (U/B/L/R)	11.8/11.8/9.9/9.9		13.3/13.3/11.4/11.4
Weight (Net)	5.5 kg	5.7 kg	10.7kg
Mounting	VESA 400x100		
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF4225-YNN-A11	42.2",1000nits,1920x480,HTni,LID on LCM,5in1,V1
SSH4225-YNN-T11	42.2",1000nits,1920x480,HTni,LID on LCM,AD68862HP,DC24V,5in1,V1
SSD4225-YNB-T11	42.2",1000nits,1920x480,HTni,LID on LCM,AD68862HP,O/B,DC24V,3in1,V1



4305-Y

43" TFT LCD, 1000 nits LED backlight, 3840x720

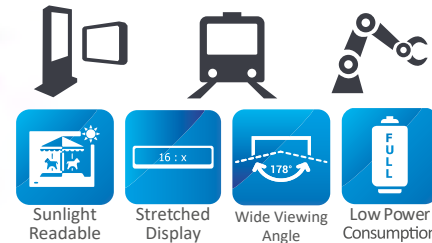

Key Features

- 43" Stretched LCD
- Ultra-Wide Screen (16 : 3)
- High Brightness 1000 nits
- LED Backlight
- LCD blacking defect free (Hi-Tni 110 °C)
- Low Power Consumption
- BL MTBF: 50,000 hours

Specifications

	SSF4305-Y	SSH4305-Y	SSD4305-Y
Description	43" TFT LCD, 1000 nits LED backlight, 3840x720		
Screen size	43"		
Display area (mm)	1073.78(H) x 201.33(V)		
Brightness	1000 cd/m2		
Resolution	3840x720		
Aspect ratio	16 : 3		
Contrast ratio	5000 : 1		
Pixel pitch (mm)	0.2796(H) x 0.2796(V)		
Pixel per inch (PPI)	91		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	72%		
Display colors	16.7M		
Response time (Typical)	12ms		
Video interface	V-by-ONE	HDMI, DP	
Input power		DC 24V	
Power consumption	50W	56W	
Dimensions (mm)	1112. 3(H) x 228.5(V) x 27.8 (T)		1114. 9(H) x 231.1(V) x 70.8 (T)
Bezel size (U/B/L/R)	12/12/18/18		14.89/14.89/19.3/19.3
Weight (Net)	4.5 kg	4.7 kg	10.7kg
Mounting			VESA 300x75
OSD key			4 Keys (Power Switch, Menu, +, -)
OSD control			Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating temperature	-20°C ~ 60 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4305-YNU-A11	43",1000nits,3840x720,HTni,LID on LCM,3in1,V1
SSH4305-YNU-S11	43",1000nits,3840x720,HTni,LID on LCM,AD68451HHP,DC24V,3in1,V1
SSD4305-YNU-S11	43",1000nits,3840x720.HTni,LID on LCM,AD68451HHP.O/B,DC24V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches





Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

4350-I

43.5" Resizing LCD, 2000 nits LED backlight, 1920x268

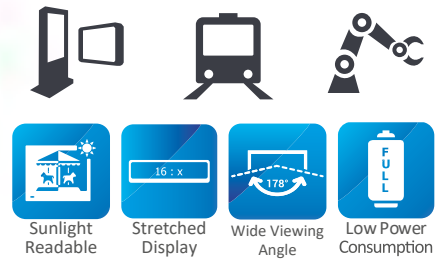

Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 2.2)
- High Brightness 2000 nits
- LED Backlight
- Low Power Consumption
- Slim Bezel
- BL MTBF: 100,000 hours

Specifications

	SSF4350-I	SSH4350-I	SSD4350-I
Description	43.5" Resizing LCD, 2000 nits LED backlight, 1920x268		
Screen size	43.5"		
Display area (mm)	1095.84(H) x 153.0(V)		
Brightness	2000 cd/m2		
Resolution	1920x268		
Aspect ratio	16 : 2.2		
Contrast ratio	7000 : 1		
Pixel pitch (mm)	0.5708(H) x 0.5708(V)		
Pixel per inch (PPI)	44		
Viewing angle	176(H),176°(V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI, HDMI , DP	
Input power		AC100~240	
Power consumption	68W	73W	
Dimensions (mm)		1121.7(H)x 184.8(V) x 21.6 (T)	1124.3x 187.4 x 64.6
Bezel size (U/B/L/R)		13.3/13.3/10.9/10.9	14.6/14.6/12.2/12.2
Weight (Net)	4.5 kg	4.7 kg	8.6 kg
Mounting			VESA 300 x 75
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4350-INN-A01	43.5",2000nits,1920x268,LID43A.3in1,V1
SSH4350-INN-J01	43.5",2000nits,1920x268,LID43A.AD5827GDHP,AC100~240V.3in1,V1
SSD4350-INB-J01	43.5",2000nits,1920x268,LID43A.AD5827GDHP,O/B,speaker*2.AC100~240V,2in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

4851-Y(NEW)

48.5" TFT LCD, 3000 nits LED Backlight , 1920x360



Sunlight Readable



Stretched Display



Wide Viewing Angle



Low Power Consumption

Key Features

- 48.5" Stretched LCD
- Ultra-Wide Screen (16 : 3)
- High Brightness 3000 nits
- LED Backlight
- LCD Blanking Defect Free (Hi-Tni 110 °C)
- Low Power Consumption
- BL MTBF: 100,000 hours



Specifications

	SSF4851-Y	SSH4851-Y	SSD4851-Y
Description	48.5" TFT LCD, 3000 nits LED backlight, 1920x360		
Screen size	48.5"		
Display area (mm)	1209.6(H) x 226.8(V)		
Brightness	3000 cd/m2		
Resolution	1920x360		
Aspect ratio	16 : 3		
Contrast ratio	7700 : 1		
Pixel pitch (mm)	0.63(H) x 0.63(V)		
Pixel per inch (PPI)	40		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	61%		
Display colors	16.7M		
Response time (Typical)	12ms		
Video interface	LVDS	DVI-I,HDMI,DP	
Input power		DC 24V	
Power consumption	71W	75W	
Dimensions (mm)	1232. 4(H) x 249.6(V) x 22.8 (T)		1235(H) x 252.2(V) x 66 (T)
Bezel size (U/B/L/R)	11.4/11.4/11.4/11.4		12.7/12.7/12.7/12.7
Weight (Net)	5.4kg T.B.D	5.7kg	10.5kg
Mounting			VESA 400x100
OSD key			4 Keys (Power Switch, Menu, +, -)
OSD control			Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating temperature	-20 °C ~ 60 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4851-YNN-A11	48.5",3000nits,1920x360,T2060,HTni,LID48C,3in1,V1
SSH4851-YNN-Q11	48.5",3000nits,1920x360,T2060,HTni,LID48C,AD8891DHP,DC24V,3in1,V1
SSD4851-YNB-Q11	48.5",3000nits,1920x360,T2060,HTni,LID48C,AD8891DHP,O/B,DC24V,2in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

4855-Y(NEW)

48.5" TFT LCD, 1000 nits LED backlight, 3840x720

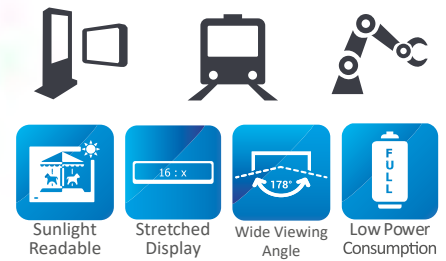

Key Features

- 48.5" Stretched LCD
- Ultra-Wide Screen (16 : 3)
- High Brightness 1000 nits
- LED Backlight
- LCD blacking defect free (Hi-Tni 110 °C)
- Low Power Consumption
- BL MTBF: 50,000 hours

Specifications

	SSF4855-Y	SSH4855-Y	SSD4855-Y
Description	48.5" TFT LCD, 1000 nits LED backlight, 3840x720		
Screen size	48.5"		
Display area (mm)	1209.6(H) x 226.8(V)		
Brightness	1000 cd/m2		
Resolution	3840x720		
Aspect ratio	16 : 3		
Contrast ratio	5000 : 1		
Pixel pitch (mm)	0.315(H) x 0.315(V)		
Pixel per inch (PPI)	81		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	72%		
Display colors	16.7M		
Response time (Typical)	12ms		
Video interface	LVDS	HDMI,DP	
Input power	DC 24V		
Power consumption	51W	55W	
Dimensions (mm)	1232. 4(H) x 249.6(V) x 25.4 (T)		1235(H) x 252.2(V) x 66 (T)
Bezel size (U/B/L/R)	9.9/9.9/9.9/9.9		12.7/12.7/12.7/12.7
Weight (Net)	5.4kg	5.7kg	10.5kg
Mounting	VESA 400x100		
OSD key	4 Keys (Power Switch, Menu, +, -)		
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	-20 °C ~ 60 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.


Ordering Information

SSF4855-YNN-A11	48.5",1000nits,3840x720,T2060,HTni,LID ON LCM,3in1,V1
SSH4855-YNN-S11	48.5",1000nits,3840x720,T2060,HTni,LID ON LCM,AD68415HHP,DC24V,3in1,V1
SSD4855-YNB-S11	48.5",1000nits,3840x720,T2060,HTni,LID ON LCM,AD68415HHP,O/B,DC24V,2in1,V1



4959-I(NEW)

49.5" Resizing LCD, 1800 nits LED backlight, 3840x1080

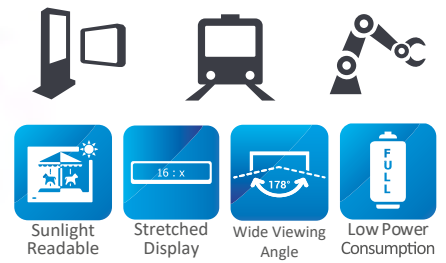

Key Features

- 49.5" Resizing LCD
- Ultra-Wide Screen (16 : 4.5)
- High Brightness 1800 nits
- LED Backlight
- Wide Viewing Angle of 178°(H), 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF4959-I	SSH4959-I	SSD4959-I
Description	49.5" Resizing LCD, 1800 nits LED backlight, 3840x1080		
Screen size	49.5"		
Display area (mm)	1209.6(H) x 340.2(V)		
Brightness	1800 cd/m2		
Resolution	3840x1080		
Aspect ratio	16 : 4.5		
Contrast ratio	6400 : 1		
Pixel pitch (mm)	0.315(H) x 0.315(V)		
Pixel per inch (PPI)	81		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	82%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	HDMI,DP	
Input power		AC100~240V	
Power consumption	110W	115W	
Dimensions (mm)		1244.6(H) x 378.7(V) x 25.4 (T)	1247.2(H) x 381.3(V) x 68.4 (T)
Bezel size (U/B/L/R)		19.25/19.25/17.5/17.5	20.6/20.6/18.8/18.8
Weight (Net)	11.5 kg	11.7 kg	18.5kg
Mounting			VESA 300x75,650x100
OSD key		4 Keys (Power Switch, Menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4959-INU-A11	49.5",1800nits,3840x1080,LID49C,4in1,V1
SSH4959-INU-S11	49.5",1800nits,3840x1080,LID49C,AD68415HHP,AC100~240V,4in1,V1
SSD4959-INU-S11	49.5",1800nits,3840x1080,LID49C,AD68415HHP,O/B,AC100~240V,3in1,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

5745-I


57.4" Resizing LCD, 1000 nits LED backlight, 3840x810



Sunlight Readable



Stretched Display



Wide Viewing Angle



Low Power Consumption



Key Features

- 57.4" Resizing LCD
- Ultra-Wide Screen (16 : 3.4)
- High Brightness 1000 nits
- LED Backlight
- Wide Viewing Angle of 178°(H), 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours

Specifications

	SSF5745-I	SSH5745-I	SSD5745-I
Description	57.4" Resizing LCD, 1000 nits LED backlight, 3840x810		
Screen size	57.4"		
Display area (mm)	1428.48(H) x 301.32(V)		
Brightness	1000 cd/m2		
Resolution	3840x810		
Aspect ratio	16 : 3.4		
Contrast ratio	5000 : 1		
Pixel pitch (mm)	0.372(H) x 0.372(V)		
Pixel per inch (PPI)	68		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	83%		
Display colors	1.07G		
Response time (Typical)	8ms		
Video interface	V-by-One	HDMI, DP	
Input power		AC100~240V	
Power consumption	63W	67W	
Dimensions (mm)	1462.5(H) x 333.84(V) x 22.11(T)		1465.4(H) x 336.8(V) x 65.1 (T)
Bezel size (U/B/L/R)	16.26/16.26/17.01/17.01		17.74/17.74/18.5/18.5
Weight (Net)	9.5 kg	9.7 kg	1.5kg
Mounting			VESA 300x75, 650x100
OSD key			4 Keys (Power Switch, Menu, +, -)
OSD control			Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF5745-INU-A11	57.4",1000nits,3840x810,LID57C,3in1,V1
SSH5745-INU-M11	57.4",1000nits,3840x810,LID57C,AD9131HP,AC100~240V,3in1,V1
SSD5745-INU-M11	57.4",1000nits,3840x810,LID57C,AD9131HP,O/B,AC100~240V,V1



ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches




Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

6745-K

67.4" Resizing LCD, 1000 nits LED backlight, 3840x810

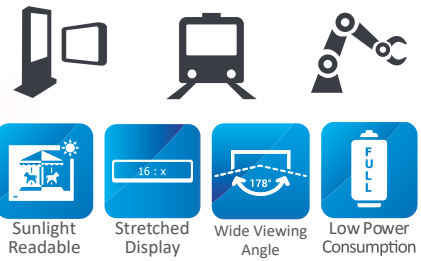

Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 4.5)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- BL MTBF: 100,000 hours

Specifications

	SSF6745-K	SSH-6745-K	SSD6745-K
Description	67.4" Resizing LCD, 1000 nits LED backlight, 3840x1080		
Screen size	67.4"		
Display area (mm)	1650.24(H) x 464.13(V)		
Brightness	1000 cd/m2		
Resolution	3840x1080		
Aspect ratio	16 : 4.5		
Contrast ratio	5000 : 1		
Pixel pitch (mm)	0.42975 (H) x 0.42975 (V)		
Pixel per inch (PPI)	59		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	72%		
Display colors	1.07G		
Response time (Typical)	8.5ms		
Video interface	V-by-One	HDMI, DP	
Input power		AC100~240V	
Power consumption	115W	118W	
Dimensions (mm)		1696.3(H) x 497(V) x 28.2(T)	1699,7(H) x 500.4(V) x 71.4 (T)
Bezel size (U/B/L/R)		17.16/17.16/23.02/23.03	
Weight (Net)	19.3kg	19.6kg	33.5kg
Mounting			500x150, 900x150
OSD key		5 Keys (Power Switch, Menu, +, Exit, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF6745-kNU-A11	67.4",1000nits,3840x1080,LID67C,3in1,V1
SSH6745-kNU-M11	67.4",1000nits,3840x1080,LID67C,AD9131HP,AC100~240V,3in1,V1
SSD6745-kNU-M11	67.4",1000nits,3840x1080,LID67C,AD9131HP,Speaker*2,O/B,AC100~240V,V1



SPANpixel

Your OEM/ODM Partner

4K

16:3

MTBF

Innovative Resizing LCD Solutions from Litemax
Stretched displays with ultra-wide, customized aspect ratios.



ISO 9001



ISO 14001



Company

Headquarters

ES France
127 rue de Buzenval BP 26
92380 Garches
Tél : +33 (0)1 47 95 99 80
Fax : +33 (0)1 47 01 16 22
www.es-france.com

China

Headquarters

ES China
Room 1001, Building 10
No. 1000, Zhongyuan Road
Zhongyuan, Beijing
Tél : +86 (0)10 6040 1111
Fax : +86 (0)10 6040 1112

Branch

ES Shenzhen
Room 1001, Building 10
No. 1000, Zhongyuan Road
Zhongyuan, Beijing
Tél : +86 (0)755 2666 6666
Fax : +86 (0)755 2666 6667

Germany


Headquarters

ES Germany
Rheinstraße 10
D-42699 Solingen
Tél : +49 (0)212 3000 0000
Fax : +49 (0)212 3000 0001

India

Headquarters

ES India
Plot No. 10, Phase 1
Industrial Area, Gurgaon
Tél : +91 (0)124 4000 0000
Fax : +91 (0)124 4000 0001

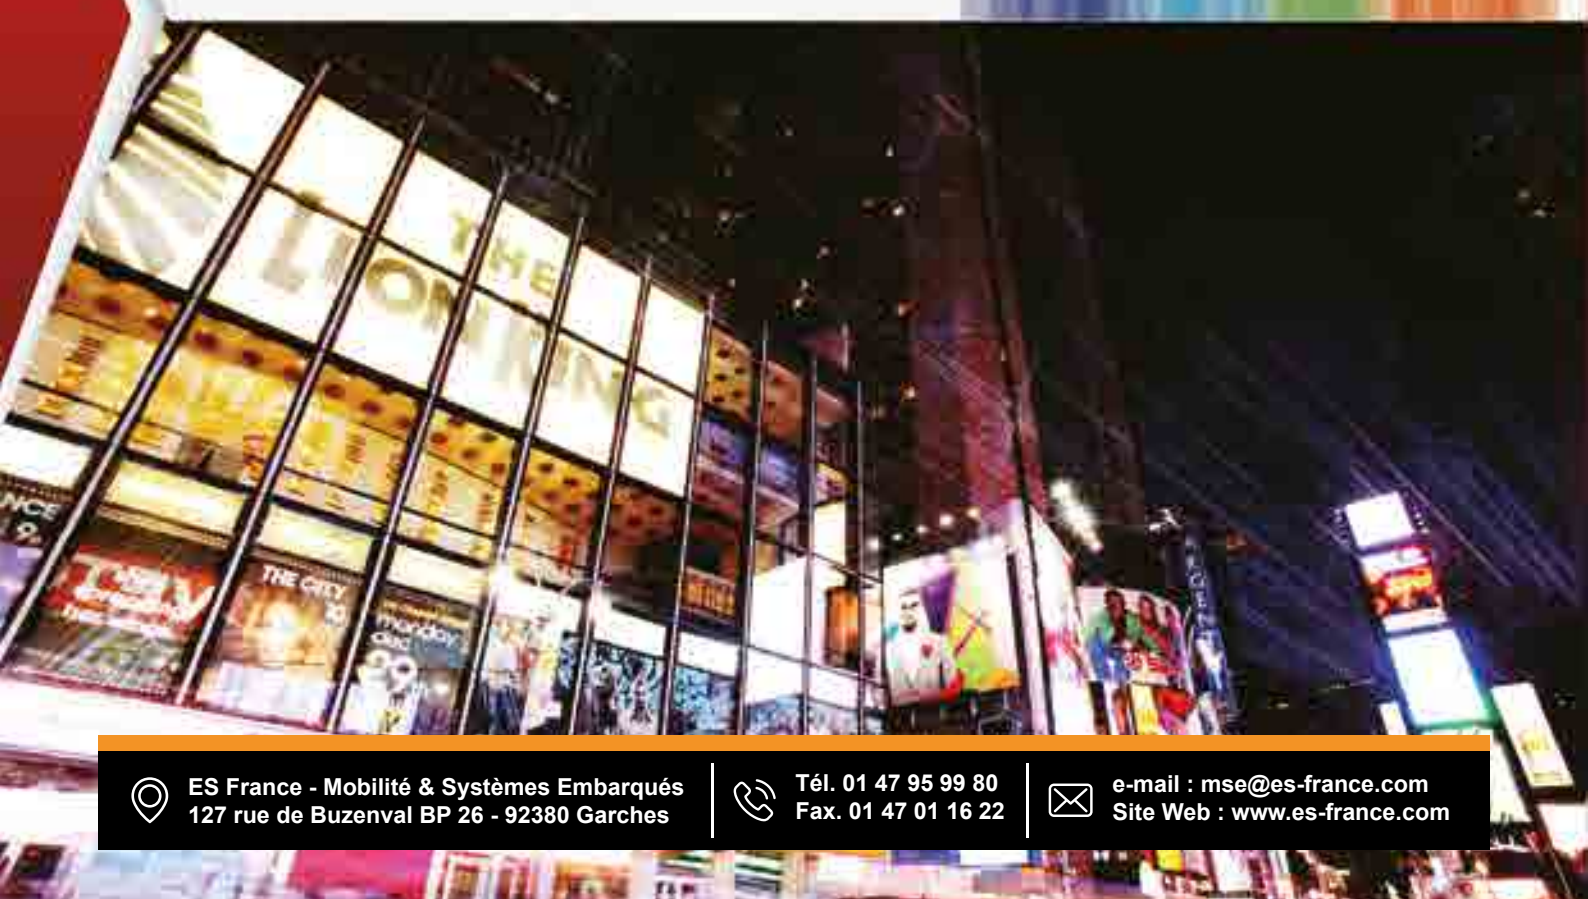

ES France - Mobilité & Systèmes Embarqués
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 80
Fax. 01 47 01 16 22



e-mail : mse@es-france.com
Site Web : www.es-france.com

WWW.LITEMAX.COM