



WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1032

Features

- X Band
- 8.2 to 12.4 GHz Frequency Range
- WR-90 Waveguide Interface
- CMR-90 Flange
- SMA Female RF Interface
- Right Angle

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1032 is a waveguide to coaxial adapter operating in the X Band with a 8.2 to 12.4 GHz frequency range. This adapter offers a WR-90 waveguide interface size using a standard CMR-90 Flange. The PEWCA1032 is constructed of Aluminum Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a SMA Female Connector.

Configuration

Waveguide Size	WR-90
Flange	CMR-90
RF Connector	SMA Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8.2		12.4	GHz
VSWR		1.25:1		

Mechanical Specifications

RF Connector	
Connector Type	SMA Female
Waveguide Interface	
Waveguide Type	WR-90
Flange Type	CMR-90
Body Material and Plating	Aluminum, Paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint PEWCA1032](#)



WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1032


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

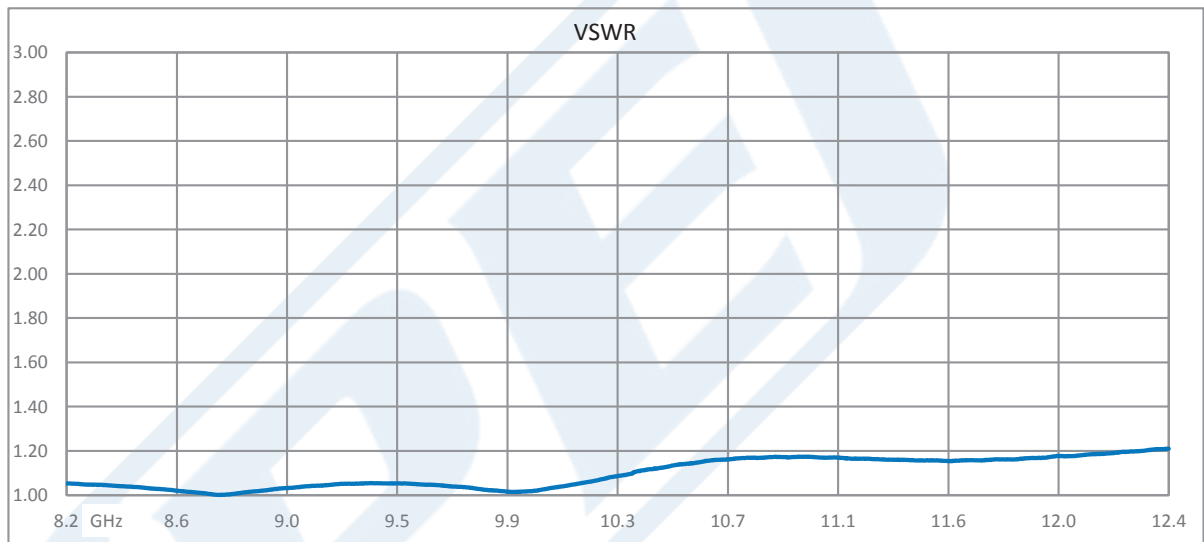

WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint PEWCA1032](#)

URL: <https://www.pasternack.com/wr90-cmr-90-flange-to-sma-female-waveguide-coax-adapter-12.4-ghz-pewca1032-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1032 CAD Drawing

WR-90 CMR-90 Flange to SMA Female Waveguide to Coax Adapter, 8.2 GHz to 12.4 GHz, X Band, Aluminum, Paint

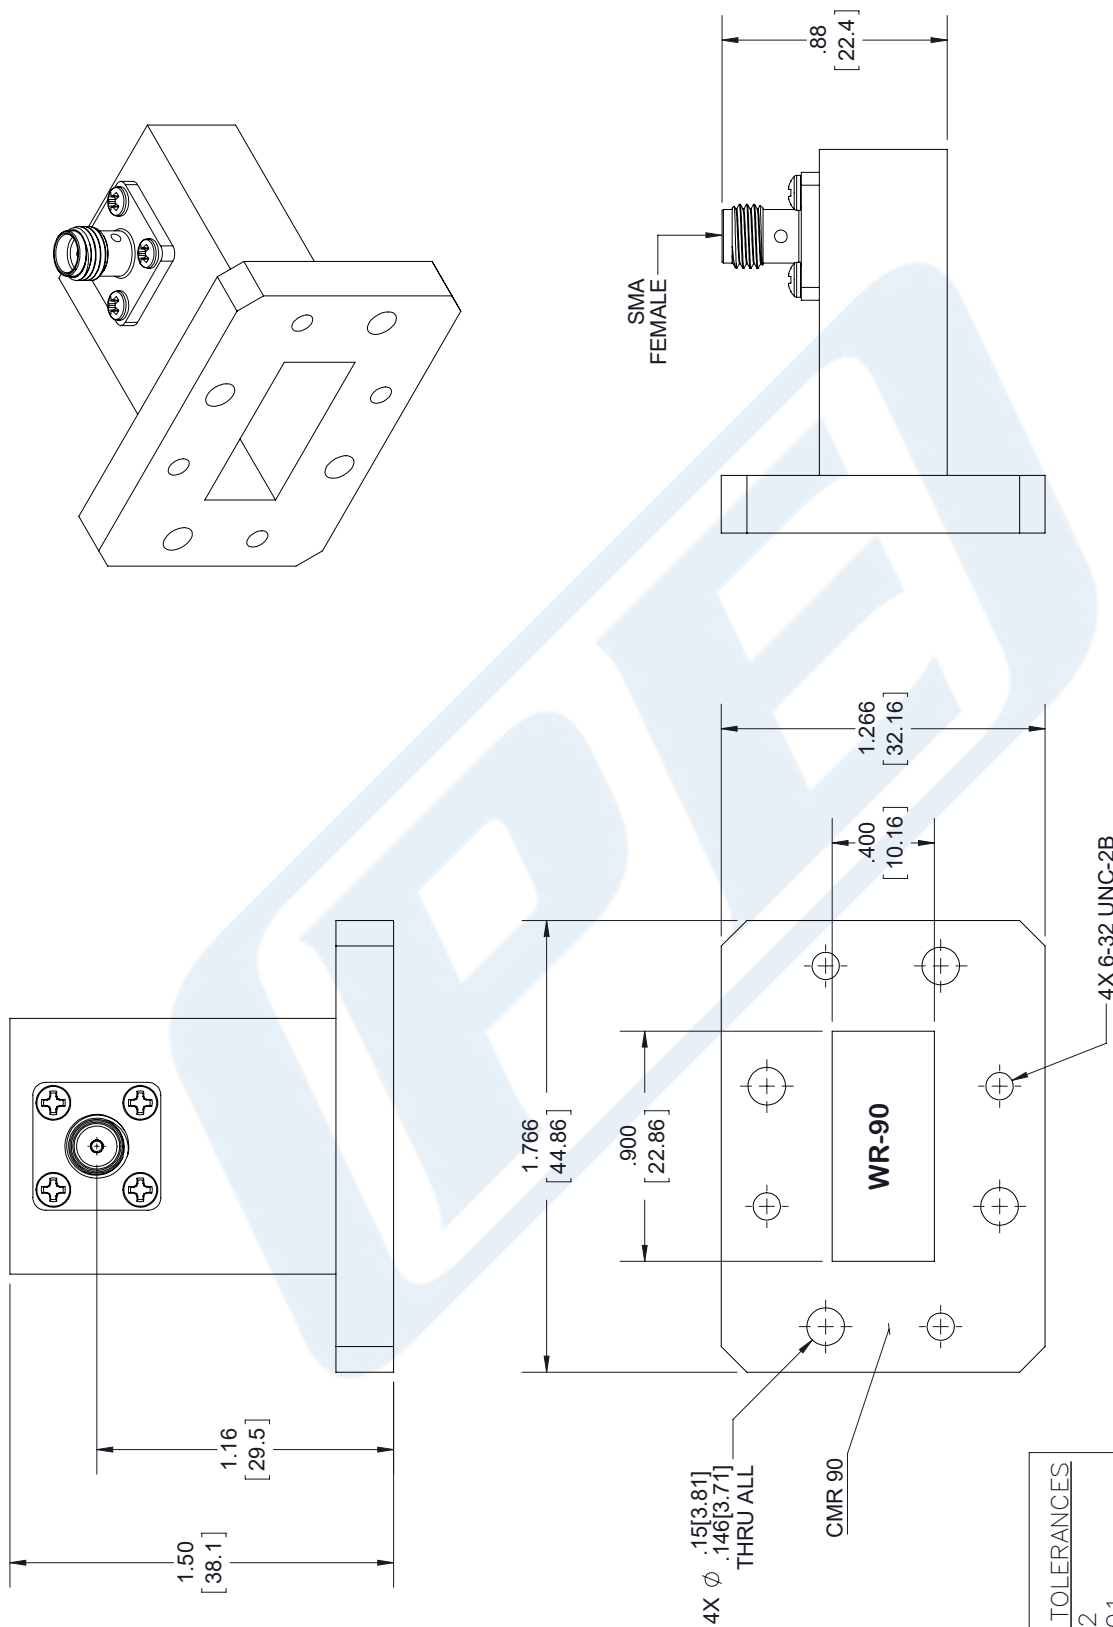

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PEWCA1032

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 100417

SCALE N/A

SIZE A

7361