

XTM-50

TUNABLE FILTER WITH ADJUSTABLE BANDWIDTH



With the XTM-50 both center wavelength and bandwidth can be independently adjusted. It is manually controlled and versions are available covering all the key telecom wavelengths from 1260 nm to 1650 nm and bandwidths from 32 pm [4 GHz] to 5 nm.

KEY FEATURES

Adjustable bandwidth flat-top filter

Ultra-sharp filter edges

High isolation

200 nm wavelength range

High accuracy and repeatability

Narrowest filter—highest selectivity

SPEC SHEET

EXFO

KEY FEATURES

Adjustable bandwidth flat-top filter

The bandwidth of the XTM-50 filters can be adjusted independently of the center wavelength. The filter has a flat-top profile with minimal ripple, less than 0.2 dB. Models are available with full width at half maximum (FWHM) bandwidths from 32 pm (4 GHz) up to 5 nm (625 GHz).

Ultra-sharp filter edges

The XTM-50 uses EXFO patented quadruple pass technology. This creates extremely sharp filter edges with slopes of up to 800 dB/nm. Single or groups of narrowly spaced DWDM channels or coherent super-channels can be selected with ease.

High isolation

In addition to the sharp filter edges, EXFO quadruple pass technology achieves higher isolation than conventional double-pass filters. Isolation is typically 60 dB.

200 nm wavelength range

All models have a very wide wavelength range and cover the key telecom wavelengths from 1260 nm to 1650 nm. The O-band model has 100 nm range.

The SCL band model cover up to a useful 200 nm range.

High accuracy and repeatability

High resolution translation stages are used for both wavelength and bandwidth control. This ensures the XTM-50 can be set accurately and repeatedly over time.

Narrowest filter—highest selectivity

The XTM-50 is the most selective filter on the market. Models are available with filter bandwidths from 32 pm (4 GHz) up to 5 nm (625 GHz).

APPLICATION

DWDM channel selection

Low dispersion, steep edges and high isolation mean that DWDM channels, or even coherent superchannels with spacing down to 10 GHz, can be separated with ease. BER tests have never been so good!

Variable OSNR source

A variable OSNR source typically consists of an ASE source combined with a variable attenuator. Adding the XTM-50 with a flat-top adjustable bandwidth enables consistent noise loading for all DWDM wavelengths.

R&D of modulation formats

The XTM-50 is perfect for the filtering and analysis of sub-bands of complex modulations formats.

Pulse shaping

Wide bandwidth flexibility enables the filter to be used for pulse shaping of femtosecond lasers.

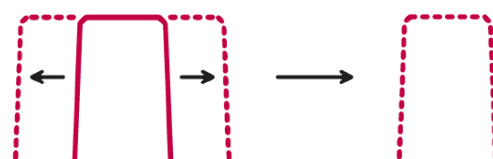


Figure 1. Bandwidth and wavelength tuning

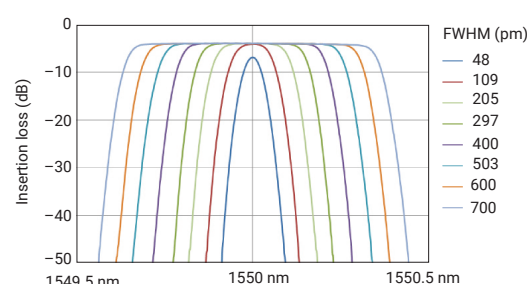


Figure 2. Bandwidth and wavelength tuning

SPECIFICATIONS

Optical characteristics	XTM-50 standard	XTM-50 ultrafine	XTM-50 O-band ^a	XTM-50 wide
Wavelength range (nm)	1450 to 1650	1480 to 1620	1260 to 1360	1525 to 1610
Wavelength resolution (pm) ^b	5	5	5	5
Minimum bandwidth (FWHM)	50 pm (6.25GHz)	32 pm (4 GHz)	50 pm (8 GHz)	50 pm (6.25 GHz)
Maximum bandwidth (FWHM)	950 pm (120 GHz)	650 pm (80 GHz)	900 pm (160 GHz)	5000 pm (625 GHz)
Bandwidth resolution	1 pm	1 pm	1 pm	0.3 % of FWHM typical
Filter edge gradient	500 dB/nm typical ^c	800 dB/nm typical	500 dB/nm typical ^c	500 dB/nm typical ^d
Insertion loss	5 dB (4.5 dB typical) ^{e, f}	5 dB (4.0 dB typical) ^{f, g}	5 dB (4.5 dB typical) ^{f, h}	5 dB (4.5 dB typical) ^{i, j}
Flatnes (dB)	0.2 ^k	0.2 ^l	0.3 ^m	0.2 ⁿ
Polarization dependent loss (dB)	±0.2 ^e	±0.2 ^g	±0.2 ^h	±0.2 ⁱ
Out-of-band suppression (crosstalk)	40 dB (60 dB typical) ^o	40 dB (50 dB typical) ^o	40 dB (60 dB typical) ^o	40 dB (45 dB typical) ^o
Interface				
Optical fiber type	SMF or PMF	SMF or PMF	SMF or PMF	SMF
Connector type	FC/PC or FC/APC			
Operating conditions				
Temperature range	15 °C to 35 °C (59 °F to 95 °F)			
Maximum optical input power (dBm)	30	30	30	27
Size				
Dimensions (W x D x H)	230 mm x 173 mm x 136 mm (9 in x 6.8 in x 5.35 in)			
Weight	2.2 kg (4.4 lbs)			

Notes

- a. Specifications apply for wavelengths not equal to any water absorption line.
- b. Typical, related to user dexterity.
- c. From -3 dB and -40 dB for FWHM < 800 pm.
- d. Between -3 and -40 dB. Typically 550 dB/nm at FWHM = 50 pm; 450 dB/nm at FWHM = 1 nm; 225 dB/nm at FWHM = 5 nm.
- e. From 1500 nm to 1600 nm and FWHM > 100 pm.
- f. At lowest FWHM the insertion loss is 7 dB typical.
- g. From 1500 nm to 1600 nm and FWHM > 60 pm.
- h. From 1280 nm to 1340 nm and FWHM > 100 pm.
- i. For FWHM > 100 pm.
- j. At lowest FWHM the insertion loss is < 7.0 dB.
- k. Centered width of FWHM-150 pm. For 150 pm < FWHM < 650 pm.
- l. Centered width of FWHM-100 pm. For 100 pm < FWHM < 500 pm.
- m. From 1280 nm to 1340 nm.
- n. Centered width of FWHM-150 pm. For 150 pm < FWHM < 2000 pm.
- o. Measured 1 nm away from the -3 dB points.



ADVANCED FEATURES AND PERFORMANCE

Easy access to optical connectors for cleaning. Easing maintenance and enabling the lowest losses to be maintained.



ELECTRONIC VERSIONS AVAILABLE

Electronic versions are also available. These provide a touch panel interface as well as USB, Ethernet and RS-232C ports for remote control. The XFA filter has a fixed bandwidth and is designed to minimize costs for production facilities. The XTA-50 is accurately calibrated and has both bandwidth and wavelength control. Optical properties are equivalent to the XTM-50.

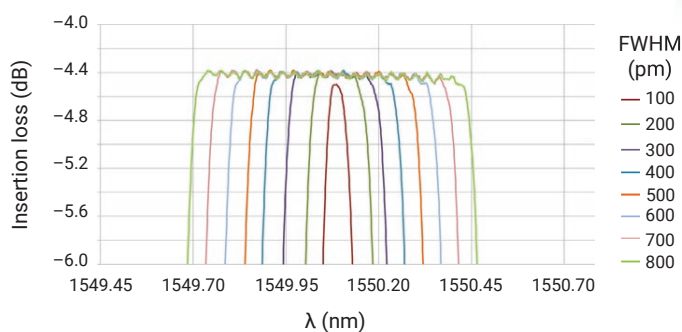


Figure 3. Expanded view of filter profile (wide)

ORDERING INFORMATION

XTM-50-XX-XX-XX

Model ■

SCL-S = 1450 nm to 1650 nm, bandwidth 50 pm to 950 pm
 SCL-U = 1480 nm to 1620 nm, bandwidth 32 pm to 650 pm
 CL-W = 1525 nm to 1610 nm, bandwidth 50 pm to 5000 pm
 O-S = 1260 nm to 1360 nm, bandwidth 50 pm to 900 pm

Output fiber ■

00 = SMF28 singlemode fiber
 M = Polarization maintaining fiber^a

Example: XTM-50-SCL-S-M-58

Connector adapter ■

50 = FC/PC
 58 = FC/APC

Note

a. Not available for CL-W model.

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.