



The Industry's Largest Selection of Ready-to-Ship  
**Electromechanical Switches**

In-Stock and Shipped Same Day

USA & Canada +1 (866) 727-8376  
International +1 (949) 261-1920  
pasternack.com

**PEI PASTERNAK**  
an INFINITE brand

ES France - Département RF & Hyperfréquences - 127 rue de Buzenval BP 26 - 92380 Garches  
Tél. 01 47 95 99 60 - Fax. 01 47 01 16 22 - e-mail: hyper@es-france.com - Site Web: www.es-france.com
















# Broad Selection of Ready-to-Ship Electromechanical Switches

Pasternack offers a comprehensive selection of electromechanical relay switches that covers broadband frequencies ranging from DC to 50 GHz. Over 280 models are available in coaxial, waveguide, and SMT packaged configurations that incorporate popular combinations of actuators and features, and offer high reliability performance rated up to 10 million lifecycles. All switch models are classified as EAR99. The designs are uniquely qualified for defense, wireless communications, radar, test instrumentation, and many other applications and industries. These electromechanical relay switches are part of Pasternack's broad offering of RF, microwave and mmWave components and assemblies that are in-stock and available for same-day shipping.




<b>Electromechanical Relay Switches.....</b>	<b><u>2</u></b>
<b>10M Life Cycles.....</b>	<b><u>2</u></b>
<b>5M Life Cycles.....</b>	<b><u>3</u></b>
<b>2.5M Life Cycles.....</b>	<b><u>5</u></b>
<b>2M Life Cycles.....</b>	<b><u>6</u></b>
<b>1M Life Cycles.....</b>	<b><u>10</u></b>
<b>RF Relay A/B Coax.....</b>	<b><u>21</u></b>
<b>Waveguides.....</b>	<b><u>22</u></b>
<b>Electromechanical Relay Switches.....</b>	<b><u>22</u></b>
<b>Double Ridge Electromechanical Relay Switches.....</b>	<b><u>25</u></b>













## 10M Life Cycles Relay Switches

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6056</a> 	SPDT	40 GHz	Failsafe/Indicators, Non-Terminated	2.92mm Female	50	0.8	28	10	No
<a href="#">PE71S6057</a> 	SPDT	40 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	2.92mm Female	50	0.8	28	10	No
<a href="#">PE71S6087</a> 	SP6T	26.5 GHz	Latching/Global Reset, Non-Terminated	SMA Female	55	0.6	28	40	No
<a href="#">PE71S6088</a> 	SP6T	26.5 GHz	Normally Open/TTL Logic, Non-Terminated	SMA Female	55	0.6	28	40	No
<a href="#">PE71S6335</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, Non-Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	Yes
<a href="#">PE71S6337</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	Yes
<a href="#">PE71S6336</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Non-Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	Yes
<a href="#">PE71S6338</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	Yes
<a href="#">PE71S6333</a> 	SP4T	20 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	Yes
<a href="#">PE71S6341</a> 	SP4T	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	Yes
<a href="#">PE71S6331</a> 	SP6T	20 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	Yes
<a href="#">PE71S6339</a> 	SP6T	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	Yes
<a href="#">PE71S6052</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.35	28	100	No
<a href="#">PE71S6053</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	100	No
<a href="#">PE71S6054</a> 	SPDT	18 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	SMA Female	60	0.5	28	100	No












## 10M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6055</a> 	SPDT	18 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	SMA Female	60	0.5	12	100	No
<a href="#">PE71S6086</a> 	SP6T	6 GHz	Latching/Global Reset, Non-Terminated	SMA Female	70	0.3	28	70	No
<a href="#">PE71S6085</a> 	SP6T	6 GHz	Normally Open/Non-Terminated	SMA Female	70	0.3	28	70	No












## 5M Life Cycles Relay Switches

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6334</a> 	SP4T	40 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.5	24	5	Yes
<a href="#">PE71S6342</a> 	SP4T	40 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.5	24	5	Yes
<a href="#">PE71S6332</a> 	SP6T	40 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.9	24	5	Yes
<a href="#">PE71S6340</a> 	SP6T	40 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.9	24	5	Yes
<a href="#">PE71S6360</a> 	SPDT	26.5 GHz	Latching/Terminated	SMA Female	50	0.6	12	50	Yes
<a href="#">PE71S6361</a> 	SPDT	26.5 GHz	Latching/Terminated	SMA Female	50	0.6	28	50	Yes
<a href="#">PE71S6366</a> 	SP4T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	12	50	Yes
<a href="#">PE71S6367</a> 	SP4T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	28	50	Yes
<a href="#">PE71S6378</a> 	SP6T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	12	50	Yes
<a href="#">PE71S6379</a> 	SP6T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	28	50	Yes



## 5M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6353</a> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6395</a> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6396</a> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6406</a> 	SPDT	18 GHz	Latching/Indicators, Terminated	SMA Female	65	0.35	24	60	Yes
<a href="#">PE71S6407</a> 	SPDT	18 GHz	Latching/Indicators, TTL Logic, Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6352</a> 	SPDT	18 GHz	Latching/Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6393</a> 	SPDT	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6394</a> 	SPDT	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6358</a> 	SPDT	18 GHz	Latching/Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6359</a> 	SPDT	18 GHz	Latching/Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6364</a> 	SP4T	18 GHz	Latching/Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6365</a> 	SP4T	18 GHz	Latching/Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6074</a> 	SP4T	18 GHz	Normally Open/Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6077</a> 	SP6T	18 GHz	Latching/Indicators, Self Cut Off, Auto Reset, Diodes, Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6372</a> 	SP6T	18 GHz	Latching/Non-Terminated	SMA Female	80	0.4	28	60	Yes






## 5M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6376</a> 	SP6T	18 GHz	Latching/Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6377</a> 	SP6T	18 GHz	Latching/Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6075</a> 	SP6T	18 GHz	Normally Open/Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6402</a> 	Transfer	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	60	0.5	28	60	Yes
<a href="#">PE71S6401</a> 	Transfer	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	60	0.5	28	60	Yes
<a href="#">PE71S6405</a> 	DP3T	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6362</a> 	SP3T	18 GHz	Latching/Non-Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6399</a> 	SPDT	12 GHz	Latching/Indicators, Non-Terminated	N Female	70	0.5	28	200	Yes
<a href="#">PE71S6349</a> 	SPDT	12 GHz	Latching/Non-Terminated	N Female	70	0.5	12	200	Yes
<a href="#">PE71S6387</a> 	Transfer	12 GHz	Latching/Non-Terminated	N Female	60	0.7	12	200	Yes
<a href="#">PE71S6390</a> 	Transfer	12 GHz	Latching/Non-Terminated	SMA Female	60	0.3	12	75	Yes









## 2.5M Life Cycles Relay Switches

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6071</a> 	Transfer	40 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	2.92mm Female	50	0.8	28	10	No
<a href="#">PE71S6065</a> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	28	100	No
















## 2.5M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6066</a> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	100	No
<a href="#">PE71S6069</a> 	Transfer	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6067</a> 	Transfer	18 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6068</a> 	Transfer	18 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Non-Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6070</a> 	Transfer	12.4 GHz	Failsafe/Indicators, Non-Terminated	N Female	60	0.5	28	200	No

## 2M Life Cycles Relay Switches
















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6329</a> 	SPDT	50 GHz	Failsafe/Non-Terminated	2.4mm Female	60	0.3	28	80	No
<a href="#">PE71S6330</a> 	SPDT	50 GHz	Latching/Non-Terminated	2.4mm Female	60	1.1	28	80	Yes
<a href="#">PE71S6064</a> 	SPDT	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Terminated	2.92mm Female	50	0.8	28	10	No
<a href="#">PE71S6089</a> 	SP6T	40 GHz	Latching/Global Reset, Non-Terminated	2.92mm Female	45	1.1	28	5	No
<a href="#">PE71S6084</a> 	SP6T	40 GHz	Latching/Indicators, Reset, Terminated	2.92mm Female	50	1.1	28	5	No
<a href="#">PE71S6078</a> 	SP6T	40 GHz	Latching/Self Cut Off, Reset, Diodes, Non-Terminated	2.92mm Female	50	1.1	28	5	No
<a href="#">PE71S6356</a> 	SPDT	26.5 GHz	Failsafe/Terminated	SMA Female	50	0.6	12	50	Yes
<a href="#">PE71S6357</a> 	SPDT	26.5 GHz	Failsafe/Terminated	SMA Female	50	0.6	28	50	Yes

## 2M Life Cycles Relay Switches Continued
















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6370</a> 	SP4T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	12	50	Yes
<a href="#">PE71S6371</a> 	SP4T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	28	50	Yes
<a href="#">PE71S6079</a> 	SP6T	26.5 GHz	Latching/Self Cut Off, Reset, Diodes, Terminated	SMA Female	50	0.7	28	40	No
<a href="#">PE71S6382</a> 	SP6T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	12	50	Yes
<a href="#">PE71S6383</a> 	SP6T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	28	50	Yes
<a href="#">PE71S6410</a> 	SP10T	20 GHz	Normally Open/Non-Terminated	SMA Female	70	0.7	28	60	Yes
<a href="#">PE71S6351</a> 	SPDT	18 GHz	Failsafe/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6347</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6391</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	28	60	No
<a href="#">PE71S6392</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	12	60	No
<a href="#">PE71S6060</a> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6354</a> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.35	12	60	Yes
<a href="#">PE71S6355</a> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6404</a> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.35	28	60	Yes
<a href="#">PE71S6350</a> 	SPDT	18 GHz	Failsafe/TTL Logic, Non-Terminated	SMA Female	65	0.35	12	60	Yes













## 2M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6062</a> 	SPDT	18 GHz	Latching/Indicators, Self Cut Off, Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6061</a> 	SPDT	18 GHz	Latching/Indicators, Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6063</a> 	SPDT	18 GHz	Latching/TTL Logic, Terminated	SMA Female	60	0.5	28	100	No
<a href="#">PE71S6363</a> 	SP4T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6408</a> 	SP4T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6368</a> 	SP4T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6369</a> 	SP4T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6373</a> 	SP6T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6409</a> 	SP6T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	28	60	No
<a href="#">PE71S6380</a> 	SP6T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6381</a> 	SP6T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	28	60	Yes
<a href="#">PE71S6374</a> 	SP6T	18 GHz	Normally Open/TTL Logic, Non-Terminated	SMA Female	80	0.4	12	60	Yes
<a href="#">PE71S6375</a> 	SP6T	18 GHz	Normally Open/TTL Logic, Non-Terminated	SMA Female	80	0.4	24	60	Yes
<a href="#">PE71S6080</a> 	SP8T	18 GHz	Latching/Indicators, Reset, Terminated	SMA Female	60	0.6	28	100	No
<a href="#">PE71S6081</a> 	SP8T	18 GHz	Latching/Self Cut Off, Auto Reset, Indicators, Diodes, Terminated	SMA Female	60	0.6	28	100	No



## 2M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6384</a> 	SP8T	18 GHz	Normally Open/Non-Terminated	SMA Female	75	0.5	12	60	Yes
<a href="#">PE71S6076</a> 	SP10T	18 GHz	Normally Open/Non-Terminated	SMA Female	55	0.7	28	100	No
<a href="#">PE71S6083</a> 	SP12T	18 GHz	Latching/Indicators, Reset, Terminated	SMA Female	50	0.8	28	100	No
<a href="#">PE71S6388</a> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	60	Yes
<a href="#">PE71S6389</a> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	24	60	Yes
<a href="#">PE71S6400</a> 	Transfer	18 GHz	Latching/Non-Terminated	SMA Female	60	0.5	28	60	Yes
<a href="#">PE71S6072</a> 	SP6T	12.4 GHz	Latching/Indicators, Reset, Non-Terminated	N Female	60	0.5	12	200	No
<a href="#">PE71S6073</a> 	SP6T	12.4 GHz	Latching/Indicators, Reset, Non-Terminated	N Female	60	0.5	28	200	No
<a href="#">PE71S6082</a> 	SP12T	12.4 GHz	Latching/Self Cut Off, Auto Reset, Indicators, Diodes, Terminated	SMA Female	60	0.6	28	120	No
<a href="#">PE71S6348</a> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	12	200	Yes
<a href="#">PE71S6397</a> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	28	200	No
<a href="#">PE71S6398</a> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	12	200	No
<a href="#">PE71S6385</a> 	Transfer	12 GHz	Failsafe/Non-Terminated	N Female	60	0.7	28	200	Yes
<a href="#">PE71S6403</a> 	Transfer	12 GHz	Failsafe/Non-Terminated	N Female	60	0.7	28	200	Yes
<a href="#">PE71S6386</a> 	Transfer	12 GHz	Failsafe/TTL Logic, Non-Terminated	N Female	60	0.7	28	200	Yes
















## 2M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6092</a> 	SPDT	8 GHz	Failsafe/Hot Switching, Non-Terminated	SMT	30	0.8	24	35	No
<a href="#">PE71S6343</a> 	SPDT	8 GHz	Failsafe/Hot Switching, Non-Terminated	SMT	30	0.8	12	35	Yes
<a href="#">PE71S6093</a> 	SPDT	8 GHz	Latching/Hot Switching, Non-Terminated	SMT	30	0.8	24	35	No
<a href="#">PE71S6344</a> 	SPDT	8 GHz	Latching/Hot Switching, Non-Terminated	SMT	30	0.8	12	35	Yes
<a href="#">PE71S6090</a> 	SPDT	3 GHz	Failsafe/Hot Switching, Non-Terminated	SMT	40	0.3	24	175	No
<a href="#">PE71S6345</a> 	SPDT	3 GHz	Failsafe/Hot Switching, Non-Terminated	SMT	40	0.3	12	175	Yes
<a href="#">PE71S6091</a> 	SPDT	3 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	0.3	24	175	No
<a href="#">PE71S6346</a> 	SPDT	3 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	0.3	12	175	Yes
<a href="#">PE71S8001</a> 	SPDT	3 GHz	Latching/Non-Terminated	SMA Female	30		12		No
<a href="#">PE71S8002</a> 	SP4T	3 GHz	Latching/Non-Terminated	SMA Female	30		12		No

## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6104</a> 	SPDT	40 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.8	12	10	No
<a href="#">PE71S6105</a> 	SPDT	40 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.8	28	10	No













## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6102</a> 	SPDT	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	0.8	12	10	No
<a href="#">PE71S6103</a> 	SPDT	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	0.8	28	10	No
<a href="#">PE71S6108</a> 	SPDT	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	55	0.8	12	10	No
<a href="#">PE71S6109</a> 	SPDT	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	55	0.8	28	10	No
<a href="#">PE71S6106</a> 	SPDT	40 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	5	No
<a href="#">PE71S6107</a> 	SPDT	40 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6140</a> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	1	12	5	No
<a href="#">PE71S6141</a> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6319</a> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	2.92mm Female	50	1	12	3	No
<a href="#">PE71S6320</a> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	2.92mm Female	50	1	28	3	No
<a href="#">PE71S6318</a> 	SP4T	40 GHz	Latching/Self Cut Off, Diodes, Reset, Terminated	2.92mm Female	50	1	28	3	No
<a href="#">PE71S6317</a> 	SP4T	40 GHz	Latching/Self Cut Off, Diodes, Terminated	2.92mm Female	50	1	12	3	No
<a href="#">PE71S6138</a> 	SP4T	40 GHz	Latching/Self Cut Off, Reset, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	3	No
<a href="#">PE71S6139</a> 	SP4T	40 GHz	Latching/Self Cut Off, Reset, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	3	No
<a href="#">PE71S6136</a> 	SP4T	40 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	3	No
















## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6137</a> 	SP4T	40 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	3	No
<a href="#">PE71S6134</a> 	SP4T	40 GHz	Normally Open/Non-Terminated	2.92mm Female	50	0.9	12	3	No
<a href="#">PE71S6135</a> 	SP4T	40 GHz	Normally Open/Non-Terminated	2.92mm Female	50	1	28	3	No
<a href="#">PE71S6148</a> 	SP6T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	3	No
<a href="#">PE71S6149</a> 	SP6T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	3	No
<a href="#">PE71S6321</a> 	SP6T	40 GHz	Latching/Self Cut Off, Indicators, Reset, Terminated	2.92mm Female	60	1	12	3	No
<a href="#">PE71S6322</a> 	SP6T	40 GHz	Latching/Self Cut Off, Indicators, Reset, Terminated	2.92mm Female	60	1	28	3	No
<a href="#">PE71S6146</a> 	SP6T	40 GHz	Latching/Self Cut Off, Reset, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	3	No
<a href="#">PE71S6147</a> 	SP6T	40 GHz	Latching/Self Cut Off, Reset, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	3	No
<a href="#">PE71S6323</a> 	SP6T	40 GHz	Latching/Self Cut Off, TTL Logic, Indicators, Reset, Terminated	2.92mm Female	60	1	12	3	No
<a href="#">PE71S6324</a> 	SP6T	40 GHz	Latching/Self Cut Off, TTL Logic, Indicators, Reset, Terminated	2.92mm Female	60	1	28	3	No
<a href="#">PE71S6144</a> 	SP6T	40 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	1	12	3	No
<a href="#">PE71S6145</a> 	SP6T	40 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	1	28	3	No
<a href="#">PE71S6142</a> 	SP6T	40 GHz	Normally Open/Non-Terminated	2.92mm Female	50	0.9	12	3	No
<a href="#">PE71S6143</a> 	SP6T	40 GHz	Normally Open/Non-Terminated	2.92mm Female	50	1	28	3	No
















## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6120</a> 	Transfer	40 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	5	No
<a href="#">PE71S6121</a> 	Transfer	40 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6118</a> 	Transfer	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	0.9	12	5	No
<a href="#">PE71S6119</a> 	Transfer	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6124</a> 	Transfer	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	5	No
<a href="#">PE71S6125</a> 	Transfer	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6122</a> 	Transfer	40 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	12	5	No
<a href="#">PE71S6123</a> 	Transfer	40 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	0.9	28	5	No
<a href="#">PE71S6094</a> 	SPDT	26.5 GHz	Failsafe/Non-Terminated	SMA Female	50	0.5	12	20	No
<a href="#">PE71S6095</a> 	SPDT	26.5 GHz	Failsafe/Non-Terminated	SMA Female	50	0.5	28	20	No
<a href="#">PE71S6328</a> 	SPDT	26.5 GHz	Failsafe/Non-Terminated	SMA Female	70	0.4	24	20	No
<a href="#">PE71S6096</a> 	SPDT	26.5 GHz	Failsafe/TTL Logic, Diodes, Indicators, Non-Terminated	SMA Female	50	0.5	12	20	No
<a href="#">PE71S6097</a> 	SPDT	26.5 GHz	Failsafe/TTL Logic, Diodes, Indicators, Non-Terminated	SMA Female	50	0.5	28	20	No
<a href="#">PE71S6100</a> 	SPDT	26.5 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.5	12	20	No
<a href="#">PE71S6101</a> 	SPDT	26.5 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.5	28	20	No

## 1M Life Cycles Relay Switches Continued
















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6098</a> 	SPDT	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.5	12	20	No
<a href="#">PE71S6099</a> 	SPDT	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.5	28	20	No
<a href="#">PE71S6112</a> 	Transfer	26.5 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.5	12	20	No
<a href="#">PE71S6113</a> 	Transfer	26.5 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.5	28	20	No
<a href="#">PE71S6110</a> 	Transfer	26.5 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	20	No
<a href="#">PE71S6111</a> 	Transfer	26.5 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	28	20	No
<a href="#">PE71S6116</a> 	Transfer	26.5 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	SMA Female	60	0.5	12	20	No
<a href="#">PE71S6117</a> 	Transfer	26.5 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	SMA Female	60	0.5	28	20	No
<a href="#">PE71S6114</a> 	Transfer	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	60	0.5	12	20	No
<a href="#">PE71S6115</a> 	Transfer	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	60	0.5	28	20	No
<a href="#">PE71S6293</a> 	SPDT	22 GHz	Failsafe/Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6294</a> 	SPDT	22 GHz	Failsafe/Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6295</a> 	SPDT	22 GHz	Failsafe/TTL Logic, Indicators, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6296</a> 	SPDT	22 GHz	Failsafe/TTL Logic, Indicators, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6299</a> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Indicators, Terminated	SMA Female	60	0.6	12	20	No

## 1M Life Cycles Relay Switches Continued
















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6300</a> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Indicators, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6297</a> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6298</a> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6307</a> 	SP4T	22 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6308</a> 	SP4T	22 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6305</a> 	SP4T	22 GHz	Latching/Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6306</a> 	SP4T	22 GHz	Latching/Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6302</a> 	SP4T	22 GHz	Normally Open/Indicators, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6128</a> 	SP4T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6129</a> 	SP4T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6303</a> 	SP4T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6304</a> 	SP4T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6126</a> 	SP4T	22 GHz	Normally Open/Non-Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6127</a> 	SP4T	22 GHz	Normally Open/Non-Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6301</a> 	SP4T	22 GHz	Normally Open/Terminated	SMA Female	60	0.6	12	20	No


















## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6315</a> 	SP6T	22 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6316</a> 	SP6T	22 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6313</a> 	SP6T	22 GHz	Latching/Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6314</a> 	SP6T	22 GHz	Latching/Self Cut Off, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6132</a> 	SP6T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6133</a> 	SP6T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6311</a> 	SP6T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6312</a> 	SP6T	22 GHz	Normally Open/Indicators, TTL Logic, Diodes, Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6130</a> 	SP6T	22 GHz	Normally Open/Non-Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6131</a> 	SP6T	22 GHz	Normally Open/Non-Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6309</a> 	SP6T	22 GHz	Normally Open/Terminated	SMA Female	60	0.6	12	20	No
<a href="#">PE71S6310</a> 	SP6T	22 GHz	Normally Open/Terminated	SMA Female	60	0.6	28	20	No
<a href="#">PE71S6326</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	70	0.4	12	20	No
<a href="#">PE71S6327</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	70	0.4	28	20	No
<a href="#">PE7144</a> 	SPDT	18 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	SMA Female	60	0.5	10	35	Yes
















## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S2</a> 	Transfer	18 GHz	Pulse Latching/Indicators, Hot Switching, Non-Terminated	SMA Female	60	0.5	24	35	Yes
<a href="#">PE71S6152</a> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	45	No
<a href="#">PE71S6153</a> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6160</a> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6161</a> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6058</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.5	28	200	No
<a href="#">PE71S6059</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.5	12	200	No
<a href="#">PE71S6150</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.6	12	50	Yes
<a href="#">PE71S6151</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6158</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6159</a> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6156</a> 	SPDT	12.4 GHz	Latching/Indicators, TTL Logic, Diodes, Self Cut Off, Non-Terminated	N Female	60	0.5	12	50	No
<a href="#">PE71S6157</a> 	SPDT	12.4 GHz	Latching/Indicators, TTL Logic, Diodes, Self Cut Off, Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6164</a> 	SPDT	12.4 GHz	Latching/Indicators, TTL Logic, Diodes, Self Cut Off, Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6165</a> 	SPDT	12.4 GHz	Latching/Indicators, TTL Logic, Diodes, Self Cut Off, Non-Terminated	N Female	60	0.6	28	160	No
















## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6154</a> 	SPDT	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.6	12	50	No
<a href="#">PE71S6155</a> 	SPDT	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6162</a> 	SPDT	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6163</a> 	SPDT	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6168</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.4	12	50	No
<a href="#">PE71S6169</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.4	28	50	No
<a href="#">PE71S6176</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.4	12	160	No
<a href="#">PE71S6177</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.4	28	160	No
<a href="#">PE71S6204</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	TNC Female	60	0.6	12	50	No
<a href="#">PE71S6205</a> 	Transfer	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	TNC Female	60	0.6	28	50	No
<a href="#">PE71S6166</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.4	12	50	No
<a href="#">PE71S6167</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.4	28	50	No
<a href="#">PE71S6174</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.4	12	160	No
<a href="#">PE71S6175</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.4	28	160	No
<a href="#">PE71S6202</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	TNC Female	60	0.6	12	50	No




## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6203</a> 	Transfer	12.4 GHz	Failsafe/Non-Terminated	TNC Female	60	0.6	28	50	No
<a href="#">PE71S6172</a> 	Transfer	12.4 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	12	50	No
<a href="#">PE71S6173</a> 	Transfer	12.4 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	28	50	No
<a href="#">PE71S6180</a> 	Transfer	12.4 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	12	160	No
<a href="#">PE71S6181</a> 	Transfer	12.4 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	28	160	No
<a href="#">PE71S6170</a> 	Transfer	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	12	50	No
<a href="#">PE71S6171</a> 	Transfer	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	28	50	No
<a href="#">PE71S6178</a> 	Transfer	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	12	160	No
<a href="#">PE71S6179</a> 	Transfer	12.4 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	28	160	No
<a href="#">PE71S6200</a> 	SPDT	10 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	TNC Female	60	0.6	12	50	No
<a href="#">PE71S6201</a> 	SPDT	10 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	TNC Female	60	0.6	28	50	No
<a href="#">PE71S6198</a> 	SPDT	10 GHz	Failsafe/Non-Terminated	TNC Female	60	0.6	12	50	No
<a href="#">PE71S6199</a> 	SPDT	10 GHz	Failsafe/Non-Terminated	TNC Female	60	0.6	28	50	No
<a href="#">PE71S6184</a> 	SP4T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	50	No
<a href="#">PE71S6185</a> 	SP4T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	50	No




## 1M Life Cycles Relay Switches Continued

PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6192</a> 	SP4T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6193</a> 	SP4T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6182</a> 	SP4T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	12	50	No
<a href="#">PE71S6183</a> 	SP4T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6190</a> 	SP4T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6191</a> 	SP4T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6188</a> 	SP6T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	50	No
<a href="#">PE71S6189</a> 	SP6T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6196</a> 	SP6T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6197</a> 	SP6T	10 GHz	Normally Open/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6186</a> 	SP6T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	12	50	No
<a href="#">PE71S6187</a> 	SP6T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	28	50	No
<a href="#">PE71S6194</a> 	SP6T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	12	160	No
<a href="#">PE71S6195</a> 	SP6T	10 GHz	Normally Open/Non-Terminated	N Female	60	0.6	28	160	No
<a href="#">PE71S6206</a> 	SP6T	8 GHz	Normally Open/Non-Terminated	TNC Female	70	0.6	12	50	No

## 1M Life Cycles Relay Switches Continued
















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE71S6207</a> 	SP6T	8 GHz	Normally Open/Non-Terminated	TNC Female	60	0.6	28	50	No
<a href="#">PE7147</a> 	SPDT	4 GHz	Failsafe/Non-Terminated	N Female	70	0.25	28	275	Yes
<a href="#">PE7153</a> 	Transfer	4 GHz	Failsafe/Non-Terminated	N Female	75	0.25	28	275	Yes

## RF Relay A/B Coax Switches

















PE P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ROHS Compliant
<a href="#">PE7100</a> 	A/B Coaxial	1,000 MHz		BNC Female	50	0.7	12	5	Yes
<a href="#">PE7102</a> 	A/B Coaxial	1,000 MHz		N Female	50	0.7	12	5	Yes
<a href="#">PE7103</a> 	A/B Coaxial 75 Ohm	1,000 MHz		N Female	50	0.7	12	5	Yes

# Waveguides

## Waveguide Electromechanical Relay Switches














PE P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ROHS Compliant	ECCN
<a href="#">PEWGS6002</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">PEWGS6000</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">PEWGS6003</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">PEWGS6001</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">PEWGS6042</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	12	620	Yes	EAR99
<a href="#">PEWGS6040</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	28	620	Yes	EAR99
<a href="#">PEWGS6043</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	12	620	Yes	EAR99
<a href="#">PEWGS6041</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	28	620	Yes	EAR99
<a href="#">PEWGS6006</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	60	12	800	Yes	EAR99
<a href="#">PEWGS6004</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	60	28	800	Yes	EAR99
<a href="#">PEWGS6007</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	60	12	800		EAR99
<a href="#">PEWGS6005</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	60	28	800		EAR99
<a href="#">PEWGS6010</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.1	60	12	2,000	Yes	EAR99
<a href="#">PEWGS6008</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.1	60	28	2,000	Yes	EAR99
<a href="#">PEWGS6011</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.1	60	12	2,000	Yes	EAR99

## Waveguide Electromechanical Relay Switches Continued

PE P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ROHS Compliant	ECCN
<a href="#">PEWGS6009</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.1	60	28	2,000	Yes	EAR99
<a href="#">PEWGS6014</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	75	12	3,500	Yes	EAR99
<a href="#">PEWGS6012</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	75	28	3,500	Yes	EAR99
<a href="#">PEWGS6015</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	75	12	3,500	Yes	EAR99
<a href="#">PEWGS6013</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	75	28	3,500	Yes	EAR99
<a href="#">PEWGS6018</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">PEWGS6016</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">PEWGS6019</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">PEWGS6017</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">PEWGS6038</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	12	6,000	Yes	EAR99
<a href="#">PEWGS6036</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	28	6,000	Yes	EAR99
<a href="#">PEWGS6039</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	12	6,000	Yes	EAR99
<a href="#">PEWGS6037</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	28	6,000	Yes	EAR99
<a href="#">PEWGS6022</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99
<a href="#">PEWGS6020</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">PEWGS6023</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99



## Waveguide Electromechanical Relay Switches Continued

PE P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ROHS Compliant	ECCN
<a href="#">PEWGS6021</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">PEWGS6026</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.02	70	12	12,000	Yes	EAR99
<a href="#">PEWGS6024</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.02	70	28	12,000	Yes	EAR99
<a href="#">PEWGS6027</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.02	70	12	12,000	Yes	EAR99
<a href="#">PEWGS6025</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.02	70	28	12,000	Yes	EAR99
<a href="#">PEWGS6034</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	12	12,000	Yes	EAR99
<a href="#">PEWGS6032</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	28	12,000	Yes	EAR99
<a href="#">PEWGS6033</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	12	12,000	Yes	EAR99
<a href="#">PEWGS6035</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	12	12,000	Yes	EAR99
<a href="#">PEWGS6030</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	12	22,000	Yes	EAR99
<a href="#">PEWGS6028</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	28	22,000	Yes	EAR99
<a href="#">PEWGS6031</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.002	80	12	22,000	Yes	EAR99
<a href="#">PEWGS6029</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	28	22,000	Yes	EAR99

## Double Ridge Waveguide Electromechanical Relay Switches

PE P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ROHS Compliant	ECCN
<a href="#">PEWGS6054</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	12	2,000	Yes	EAR99
<a href="#">PEWGS6052</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	28	2,000	Yes	EAR99
<a href="#">PEWGS6055</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	12	2,000	Yes	EAR99
<a href="#">PEWGS6053</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	28	2,000	Yes	EAR99
<a href="#">PEWGS6046</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	12	8,500	Yes	EAR99
<a href="#">PEWGS6044</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	28	8,500	Yes	EAR99
<a href="#">PEWGS6047</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	12	8,500	Yes	EAR99
<a href="#">PEWGS6045</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	28	8,500	Yes	EAR99
<a href="#">PEWGS6050</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	12	8,500	Yes	EAR99
<a href="#">PEWGS6048</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	28	8,500	Yes	EAR99
<a href="#">PEWGS6051</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	12	8,500	Yes	EAR99
<a href="#">PEWGS6049</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	28	8,500	Yes	EAR99



## Your immediate source for RF parts and RF smarts


Since 1972, Pasternack has been satisfying the requirements of engineers around the world by offering the largest in-stock, ready-to-ship selection of RF, microwave, and mmWave components, assemblies and devices, including over 40,000 popular and hard-to-find items across 107 categories of interconnect, passives, actives, antennas, and test and measurement. In addition, our 99.4% in-stock availability allows us to ship your products the same day they're ordered, with no minimum order size requirements.

To ensure you get the support you need when you need it, our product line engineers and experts are on-hand, ready to help troubleshoot your technical issues and deliver the creative solutions you require for your specific project. Pasternack's highly trained sales and service team is also available to assist you 24/7 by phone, email or chat, and an extensive network of international distribution partners ensures you receive the same high level of service and support no matter where you may be.

## Visit the RF Superstore at [pasternack.com](http://pasternack.com)

Your parts are in-stock and ready to ship!


- ✓ Parameter-based online search for quick and easy product selection
- ✓ Online pricing and inventory for over 40,000 components and assemblies
- ✓ Detailed product datasheets with specifications and CAD drawings
- ✓ One page checkout saves time and streamlines the purchasing process
- ✓ "Engineer Resource Center" with RF calculators, conversion tools, RF-Opedia glossary of terms, technical articles and more
- ✓ Downloadable RF Product Guide
- ✓ Same-day shipping, with no minimum order
- ✓ Payment terms available to qualified businesses

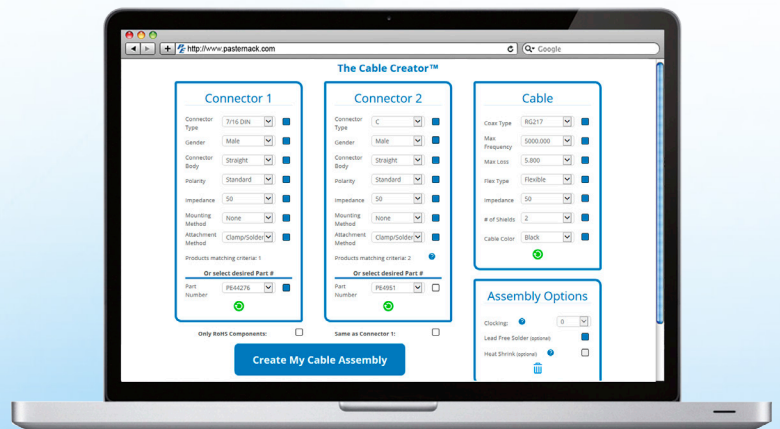

# With over 45 years of RF expertise, it's more than parts that sets us apart

Over 250,000 custom cable configurations available to ship same day!

- Choose from over 2,030 RF coax connectors
- 123 coaxial cable types, including Twinax
- Choose your desired length (metric or standard)
- Includes high-reliability and low PIM assembly types

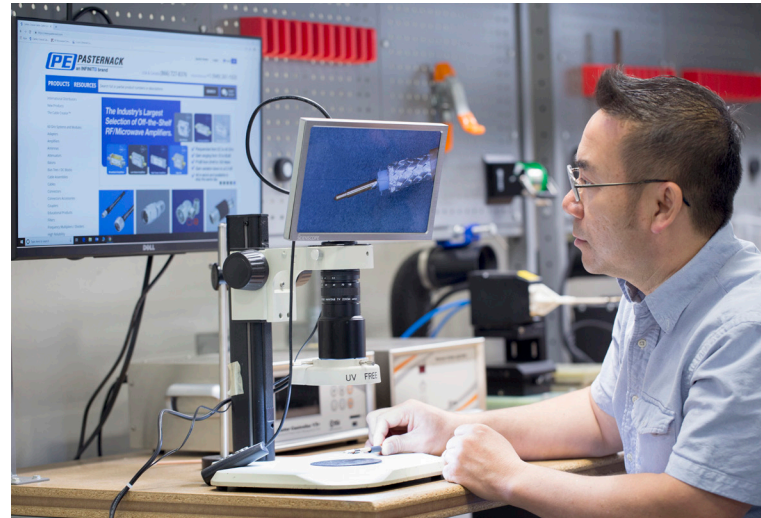

Value-added services for custom assemblies include...

- Custom booting/heat shrink
- Special labeling
- Test plots provided for an additional fee
- Custom connector clocking of right angle connectors
- Serialized test data available for high performance test cables

Full-service testing including...

- RF testing to 65 GHz
- PIM testing up to -117 dBm (-160 dBc)
- Phase Matching +/- 2 degrees per GHz
- Hi Pot testing to 5,000 volts DC and 6,000 volts AC



The information contained in this document is accurate to the best of our knowledge at time of publication. It may be necessary to make modifications to the parts and/or the documentation of the parts, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the parts described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any parts or documentation.



Same-Day Shipping



24-Hour Support  
by phone, chat or email



Secure Online Ordering  
[pasternack.com](http://pasternack.com)  
[sales@pasternack.com](mailto:sales@pasternack.com)



USA & Canada: +1 (866) 727-8376  
International: +1 (949) 261-1920

