



Elektro-Automatik



# EA-PS 10000 2U

Programmable  
DC-Power Supply



ES France - Département Puissance Energie  
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45  
Fax. 01 47 01 16 22



e-mail : [tem@es-france.com](mailto:tem@es-france.com)  
Site Web : [www.es-france.com](http://www.es-france.com)

# EA-PS 10000 2U 1.5 KW / 3.0 KW

Programmable  
DC-Power Supply



## Features

- Wide range input, 110 V - 240 V  $\pm 10\%$  1ph AC
- Active Power-Factor-Correction, typical 0.99
- Very high efficiency up to over 95 %
- Voltage from 0 - 60 V up to 0 - 1500 V
- Currents from 0 - 6 A up to 0 - 120 A
- Flexible power regulated DC output stages (autoranging)
- Regulation mode CV, CC, CP with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of control speed: Normal, Fast, Slow
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share-Bus for parallel operation of all power classes in the 10000 series
- Master-Slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

## Build-in Interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave-Bus
- Share-Bus

## Optional Interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## Software

- EA-Power Control



General specifications	
<b>AC Input</b>	
Voltage, Phases	110 V / 120 V / 208 V / 220 V / 230 V / 240 V $\pm 10\%$ , 1ph AC (110 V / 120 V 1ph with Derating, see model table)
Frequency	45-66 Hz
Power factor	>0.99
Leakage current	< 3.5 mA
Overvoltage category	2
Pollution degree	2
<b>DC Output static</b>	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (110 V - 240 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (Over 8hrs interval following 30 minutes warm-up, constant input voltage, load and temperature)
Temperature coefficient CV	$\leq 30$ ppm/ $^{\circ}$ C (Following 30 minutes warm up)
Compensation (Remote Sense)	$\leq 5\%$ $U_{Nominal}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (110 V - 240 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (Over 8hrs interval following 30 minutes warm-up, constant input voltage, load and temperature)
Temperature coefficient CC	$\leq 50$ ppm/ $^{\circ}$ C (Following 30 minutes warm up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant input voltage and constant temperature)
<b>Protective functions</b>	
OVP	Overvoltage protection adjustable, 0 - 110% $U_{Nominal}$
OCP	Overcurrent protection adjustable, 0 - 110% $I_{Nominal}$
OPP	Overpower protection adjustable, 0 - 110% $P_{Nominal}$
OT	Overtemperature protection, output shuts down in case of insufficient cooling
<b>DC Output dynamic</b>	
Rise time 10 - 90% CV	$\leq 20$ ms
Fall time 90 - 10% CV	$\leq 20$ ms
Rise time 10 - 90% CC	$\leq 10$ ms
Fall time 90 - 10% CC	$\leq 10$ ms
<b>Display accuracy</b>	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
<b>Insulation</b>	
AC-Input to DC-Output	3750 Vrms (1 Minute), creepage >8 mm
AC-Input to case (PE)	2500 Vrms
DC-Output to case (PE)	Depending on the model, see model table
DC-Output to Interfaces	1000 V DC (Model up to 360 V output), 1500 V DC (Model from 500 V output)
<b>Interfaces Digital</b>	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication 1x USB Host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
<b>Interfaces Analog</b>	
Built-in, galvanically isolated	15-pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, remote control on/off, DC output on/off
Outputs	Monitor U and I, alarms, reference voltage, status DC, status CV/CC
Accuracy U / I / P	0 - 10 V $\leq 0.2\%$ , 0 - 5 V $\leq 0.4\%$
<b>Device configuration</b>	
Parallel operation	Up to 64 units of any power class in series 10000, with Master-Slave-Bus and Share-Bus



## General specifications

### Safety and EMC

Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B CISPR 11, class B FCC 47 CFR Part 15B, Unintentional Radiator, class B EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
<b>Environmental conditions</b>	
Operating temperature	0 - 50 °C
Storage temperature	-20 - 70 °C
Humidity	≤80% RH, non-condensing
Altitude	≤2000 m (≤6600 ft)
<b>Mechanical construction</b>	
Cooling	Forced air flow from front to rear, temperature controlled fans
Dimensions (B x H x T)	19" x 2U x 462 mm (Enclosure only, not over all)
Weight	9,5 kg (21 Lbs) 1500 W unit   12,7 kg (28 Lbs) 3000 W unit



Technical Specifications	PS 10060-60	PS 10080-60	PS 10200-25	PS 10360-15	PS 10500-10
<b>DC-Output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 -200 V	0 - 360 V	0 - 500 V
Ripple rms CV	10 mV BW 300 kHz	10 mV BW 300 kHz	30 mV BW 300 kHz	30 mV BW 300 kHz	40 mV BW 300 kHz
Ripple and noise p-p CV	100 mV BW 20 MHz	100 mV BW 20 MHz	300 mV BW 20 MHz	300 mV BW 20 MHz	500 mV BW 20 MHz
Current range	0 - 60 A	0 - 60 A	0 - 25 A	0 - 15 A	0 - 10 A
Power range *1	0 - 1500 W (0 - 1200 W)	0 - 1500 W (0 - 1200 W)	0 - 1500 W (0 - 1200 W)	0 - 1500 W (0 - 1200 W)	0 - 1500 W (0 - 1200 W)
Output capacity	8640 µF	8640 µF	800 µF	330 µF	120 µF
Efficiency up to	94.0% *2	94.0% *2	94.5% *2	94.5% *2	95.0% *2
<b>Isolation</b>					
Negative DC-Pol <-> PE	±1000 V DC	±1000 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC-Pol <-> PE	+1000 V DC	+1000 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Article number</b>	06230940	06230941	06230942	06230943	06230944

\*1 The value in brackets applies to the state of derating (power reduction) for 110 V AC and 120 V AC grid

\*2 100% Power and 100% Output voltage

Technical Specifications	PS 10750-06				
<b>DC-Output</b>					
Voltage range	0 - 750 V				
Ripple rms CV	50 mV BW 300 kHz				
Ripple and noise p-p CV	500 mV BW 20 MHz				
Current range	0 - 6 A				
Power range *1	0 - 1500 W (0 - 1200 W)				
Output capacity	40 µF				
Efficiency up to	95.0% *2				
<b>Isolation</b>					
Negative DC-Pol <-> PE	±1500 V DC				
Positive DC-Pol <-> PE	+2000 V DC				
<b>Article number</b>	06230945				

\*1 The value in brackets applies to the state of derating (power reduction) for 110 V AC and 120 V AC grid

\*2 100% Power and 100% Output voltage



Technical Specifications	PS 10060-120	PS 10080-120	PS 10200-50	PS 10360-30	PS 10500-20
<b>DC-Output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple rms CV	10 mV BW 300 kHz	10 mV BW 300 kHz	30 mV BW 300 kHz	30 mV BW 300 kHz	40 mV BW 300 kHz
Ripple and noise p-p CV	100 mV BW 20 MHz	100 mV BW 20 MHz	300 mV BW 20 MHz	300 mV BW 20 MHz	500 mV BW 20 MHz
Current range	0 - 120 A	0 - 120 A	0 - 50 A	0 - 30 A	0 - 20 A
Power range *1	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)
Output capacity	17280 µF	17280 µF	1600 µF	660 µF	240 µF
Efficiency up to	94.0% *2	94.0% *2	94.5% *2	94.5% *2	95.0% *2
<b>Isolation</b>					
Negative DC-Pol <-> PE	±1000 V DC	±1000 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC-Pol <-> PE	+1000 V DC	+1000 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Article number</b>	06230946	06230947	06230948	06230949	06230950

\*1 The value in brackets applies to the state of derating (power reduction) for 110 V AC and 120 V AC grid

\*2 100% Power and 100% Output voltage

Technical Specifications	PS 10750-12	PS 11000-10	PS 11500-06		
<b>DC-Output</b>					
Voltage range	0 - 750 V	0 - 1000 V	0 - 1500 V		
Ripple rms CV	50 mV BW 300 kHz	100 mV BW 300 kHz	150 mV BW 300 kHz		
Ripple and noise p-p CV	500 mV BW 20 MHz	2000 mV BW 20 MHz	6500 mV BW 20 MHz		
Current range	0 - 12 A	0 - 10 A	0 - 6 A		
Power range *1	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)	0 - 3000 W (0 - 1500 W)		
Output capacity	80 µF	60 µF	20 µF		
Efficiency up to	95.0% *2	95.0% *2	95.0% *2		
<b>Isolation</b>					
Negative DC-Pol <-> PE	±1500 V DC	±1500 V DC	±1500 V DC		
Positive DC-Pol <-> PE	+2000 V DC	+2000 V DC	+2000 V DC		
<b>Article number</b>	06230951	06230952	06230953		

\*1 The value in brackets applies to the state of derating (power reduction) for 110 V AC and 120 V AC grid

\*2 100% Power and 100% Output voltage



## General

The DC laboratory power supplies in the PS 10000 series from EA Elektro-Automatik convert the energy from the grid into a regulated DC voltage with an efficiency of over 96%. The PSI 10000 series includes single and three phase units, which, together with the wide input range, allows use with practically all global mains voltages. The DC voltage and current are directed by the application and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging), and a wide voltage, current and power range. To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 W and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW and one 15 kW devices from the PS 10000 range. Furthermore, typical laboratory functionality is provided. This includes an extensive function generator, alarm and warning management, assorted interfaces and ports, software solutions and many more functions.

## AC Connection

The DC power supplies in the PS 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. This extends from 1-phase 110/120 V up to 240 V AC mains supply and 3-phase 208 V to 380 V, 400 V and 480 V AC mains supply. The devices can be operated in the majority of global mains supply. They adjust automatically, without additional configuration, to the available supply. In a 110/120 V and 208 V AC grid a derating of the output power is set.




## DC Output

The output of the bidirectional power supply PS 10000 with a DC voltage of 0 - 60 V up to 0 - 2000 V allows currents of 0 - 6 A up to 0 - 1000 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

## DC Connection

Connection of the DC output is via a copper rail on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

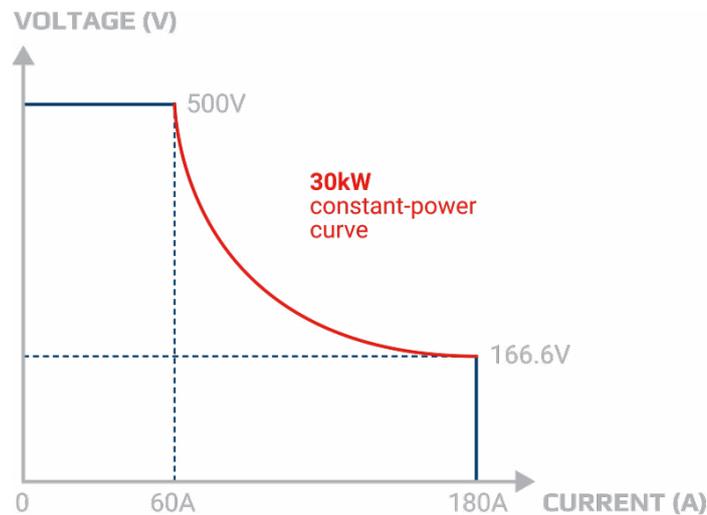

## The principle of autoranging

This description should clarify the availability the voltage and current ranges within the power hyperbole.

## Interfaces

As standard EA devices are fitted with the most important digital and analogue interfaces and ports which are galvanically isolated. These include an analogue interface which can be parameterised for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and ethernet ports. The following options which use a Plug & Play slot, complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports



## High performance systems

High power applications can be covered with high power systems of up to 1920 kW. These are achieved by using the outputs of many PS 10000 devices, changing the copper rails to vertical, and connecting in parallel. Thus, a 19" cabinet with 42 HE can provide a system with 240 kW occupying 0.6 m<sup>2</sup> floorspace. The master/slave bus enables up to 8 cabinets with a maximum of 64 units of 30 kW each to behave as one unit.

## Master-Slave-Bus and Share-Bus

If the integral master-slave bus and share bus are used, a multi device system behaves as a single device. The master-slave bus and the share bus are simply connected to each device. With the master-slave bus the system data such as total power and total current are collected and shown in the master device. Warnings and alarms of the slave devices are shown clearly in the display. The share bus provides an equal load distribution to the individual devices.



## Example representation

In this illustration you can see a fully assembled and wired 240 kW system



## Relay test in the production




Relay manufacturers must carry out assorted tests on their products during production. For these the coils and contacts are provided with exactly defined voltage and current. For the coil tests, important parameters such as operating, holding and decay current, together with the associated voltages must be checked and documented. For the contacts, not only are the current carrying capability and contact resistance important parameters, but also voltage consistency and disconnect threshold indicate much about the product quality. Testing all these is best supported by an automatic test system. A part of such a system can be the devices of the PS 10000 series with their exact, dynamic, controls of voltage, current and power providing optimal values for the best test results. With their diverse interface connections, they can be integrated into any test system and deliver the necessary data without the need for additional measuring equipment.

## On-board charger test


In an on-board charger test (OBC) the electrical features must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the PS 10000 devices test procedures allow data to be read out and saved. In this way applications can promptly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the test device, the control frequency of the power supply is adjustable. The modes Normal, Fast and Slow allow the PS 10000 devices to match the control characteristics of the on board charger.



# Technical Drawing PS 10000 2U

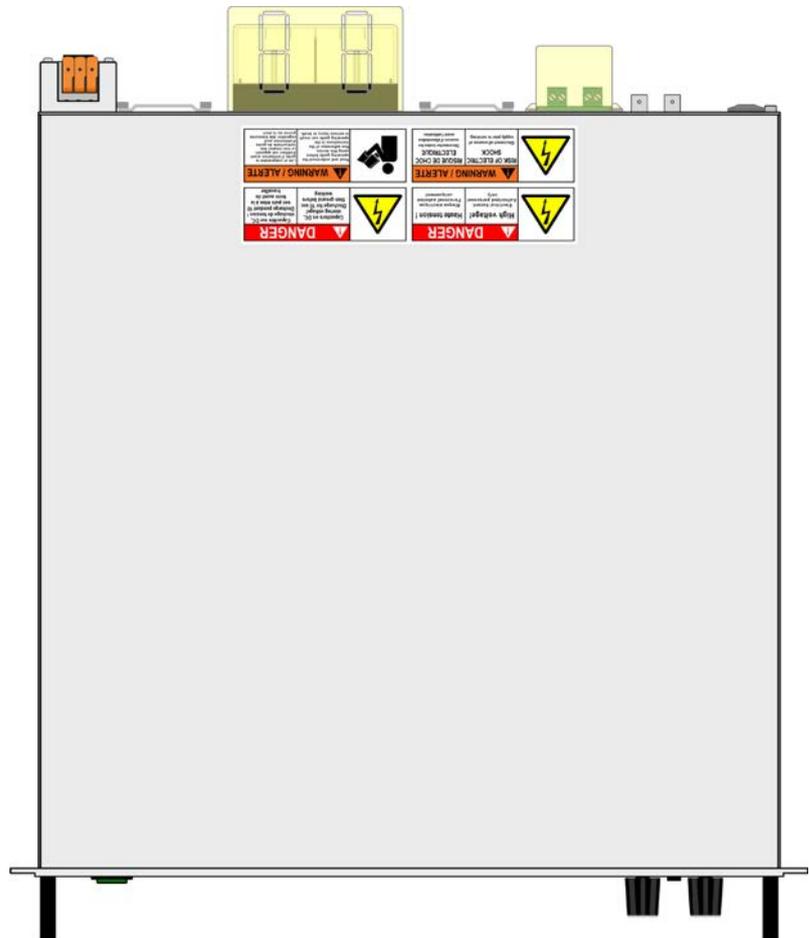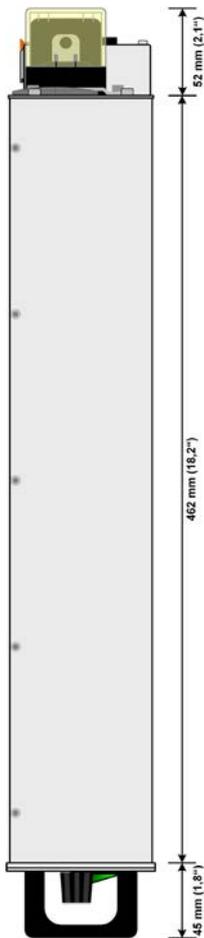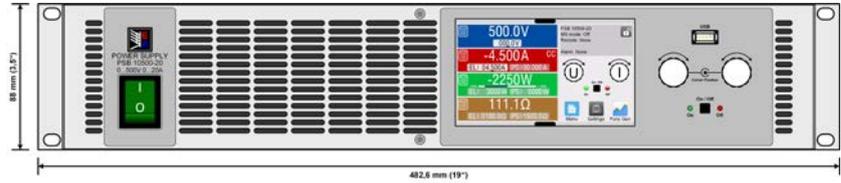


## Front Panel Description PS 10000 2U

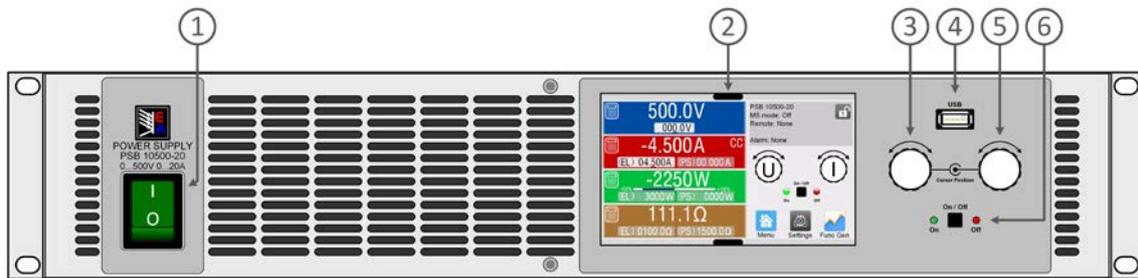

1. Main switch
2. TFT Control Interface, interactive operation and display
3. Rotary knob with push-button for settings and control
4. USB Host, use USB-stick for data logging and sequencing
5. Rotary knob with push-button for settings and control
6. On / Off push-button with LED status display

## Rear Panel Description PS 10000 2U

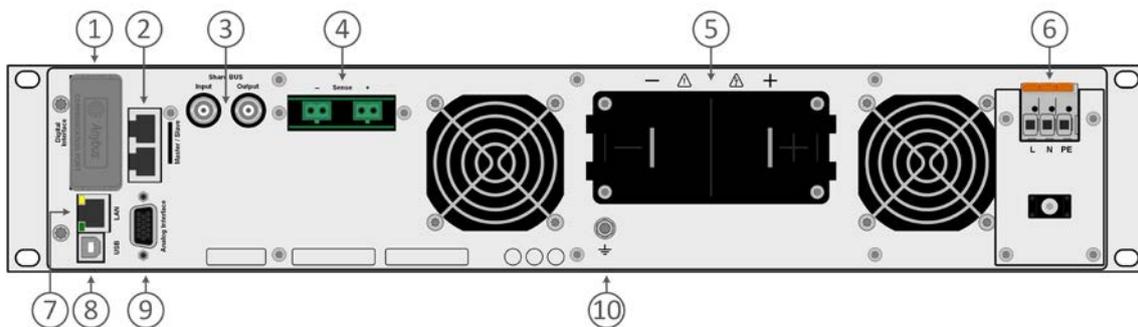

1. Slot for Interfaces
2. Master-Slave-Bus interface to set up a system for parallel connection
3. Share-Bus Interface to set up a system for parallel connection
4. Output voltage Remote Sense input terminal
5. Output terminal, Copper busbar
6. Mains input terminal
7. Ethernet interface
8. USB interface
9. Connector (DB15 Female) for isolated analog program, monitor and other functions
10. Grounding connection screw (PE)

