


Coaxial Cable Connector 24_MCX-50-2-3/111_N

Description

Straight bulkhead cable feed through

Interface standards
IEC 60169-36_CECC 22220

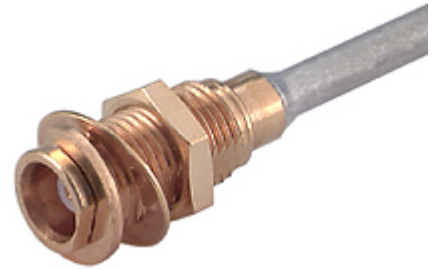

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 6 GHz

Mechanical Data

Centre contact soldered
Outer contact soldered
Weight 0.0017 kg

Environmental Data

Operating temperature -55 °C to 155 °C
2011/65/EU (RoHS - including
2015/863 and 2017/2102) compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
Fastening nut	Brass	Gold Plating (Nickel underplated)
Washer	Bronze	Gold Plating (Nickel underplated)

Related Documents

Outline drawing DOU-00009837
Catalogue drawing DCA-00009839
Assembly instruction DOC-0000389927
Mounting hole DOU-00008855

Ordering Information

Single package 24_MCX-50-2-3/111_NE

Additional Information

Suitable cables EZ_86_TP_M17

