



Probing Solutions.
Made in Germany.



Ultra-Fast Current Shunt Series UFCS

>1 GHz Bandwidth, <200 pH Insertion Inductance
Various sizes available: 1 m Ω – 52 m Ω



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com

The Ultra-Fast Current Shunt series UFCS

The Ultra-Fast Current Shunts (UFCS) represent a paradigm shift in the realm of current measurement technology, setting new standards in terms of technological sophistication. >1GHz bandwidth and ultra-low insertion inductance of <200pH enable the precise analysis of fast rise time signals with exceptional signal fidelity, making PMK's shunts with non-inductive frequency response ideal for challenging measurements like WBG (wide-bandgap) switching loss or pulse current analysis.

The UFCS models' compact form factor and high current carrying capacity ensure consistent and reliable performance. Whether measuring GaN switching losses or analyzing high-frequency transients, the solder-in shunts always guarantee highest accuracy.

The UFCS are a result of technological advancement that has not been surpassed in the field of current measurement in modern power electronics. For measurements with highest CMRR requirements the UFCS can be connected to optically isolated voltage probes, like PMK's FireFly®. For general purpose measurements the UFCS can also be connected directly to an 50 Ω input measuring instrument.

The first model releases of the UFCS shunt series are the 11 m Ω , 24 m Ω and 52 m Ω versions.

Specifications

Read the Instruction Manual before first use and keep it for future reference. A digital copy of the latest Instruction Manual revision can be downloaded at www.pmk.de.

Electrical Specifications

Allow the shunt to warm up for 20 minutes. This shunt comes with 1 year warranty. Each specification is determined at +23°C ambient temperature. Do not exceed the specifications.

PMK's UFCS ultra-fast current shunts are for use in a controlled environment in accordance with IEC 61010-1 only. The shunts are not for hand-held use. This product is not rated for CAT II, III or IV. Do not exceed the specifications¹.

Order number	Shunt Resistance	Gain	Bandwidth (3dB)	Typical Insertion Inductance ³
UFCS-R001	1 m Ω	TBD	>600 MHz	< 200pH
UFCS-R005	5 m Ω	TBD	>800 MHz	< 200pH
UFCS-R011	11 m Ω	10.7 mV/A	>1 GHz	110 pH
UFCS-R024	24 m Ω	23.7 mV/A	>1 GHz	140 pH
UFCS-R052	52 m Ω	51.1 mV/A	>900 MHz	150 pH

Order number	Maximum 1us Pulse Current ²	Maximum 100us Pulse Current ²	Continuous Current ^{2, 4}
UFCS-R001	TBD	TBD	TBD
UFCS-R005	TBD	TBD	TBD
UFCS-R011	340 A	105 A	7.3 A
UFCS-R024	230 A	70 A	4.9 A
UFCS-R052	160 A	50 A	3.4 A

Notes:

¹ Electrical Specifications¹ that are not marked with (*) as guaranteed are typical.

Performance parameters may vary if not using the recommended footprint.

² See Maximum Current per Pulse Length graph.

³ When soldered into recommended footprint, measured at 5-10 MHz, does not include footprint inductance.

⁴ Preliminary – measured at room temperature.



The following specifications are valid for all models of the UFCS series:

Pollution Degree: 1

DC Gain Accuracy: 1 %

Output connector: SMA (female)

Input Coupling of the Measuring Instrument: 50 Ω



Exceeding the specified ratings may cause irreversible failure and damage to the connected equipment.



The ratings may vary depending on usage conditions and usage environment. The provided data is intended as a reference only.

Environmental Specifications

Parameter		Specification
Temperature Range	Operating	-40 °C to +85 °C
	Non-Operating	-40 °C to +30 °C under non-pulsed current conditions -40 °C to +85 °C
Maximum Relative Humidity	Operating	80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C, non-condensing humidity
	Non-Operating	95 % relative humidity for temperatures up to +40 °C, non-condensing humidity
Altitude	Operating	up to 2000 m
	Non-Operating	up to 15000 m

Please contact sales@pmk.de, if another temperature range is of interest.

Mechanical Specifications

Parameter	Shunt Specifications	UFCS-Choke Specifications
Weight	TBD	TBD
Dimensions	See drawing ⁵	L = TBD, choke \varnothing TBD
Input	Soldering Pads ⁵	SMA (male)
Output Connector	SMA (female)	BNC (male)
Input Coupling of the Measuring Instrument ⁶	50 Ω	


Notes:

⁵ See section "Dimensional Drawing and Recommended Footprint"

⁶ Or 1M Ω input impedance and a 50 Ω feed-through termination, see ordering information

Dimensional Drawing and Recommended Footprint

The schematical drawing and all dimensions in the recommended footprint drawing are shown in [mm]. Contact sales@pmk.de or your local PMK representative for design files. Drawings not to scale.

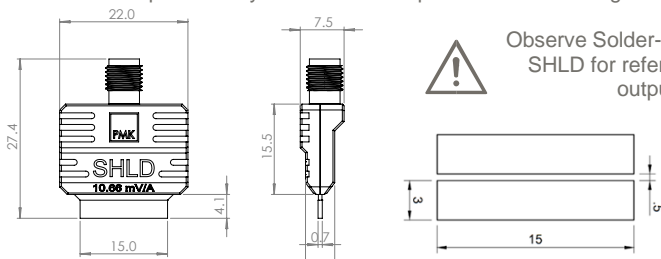

Observe Solder-in direction: UFCS IN for input, SHLD for reference (internally connected to output connector shield).



Maximum Pulse Current Derating





Exceeding the maximum pulse rating of the UFCS can cause irreversible damage to the product and connected accessories.




Always check that output voltage is compatible with ratings of oscilloscope or isolated probe.
 $V_{OUT,SHUNT} = \text{Shunt Gain} \times \text{Test Current}$.

UFCS-R0XX Maximum Pulse Current Ratings (Preliminary Calculated Data)

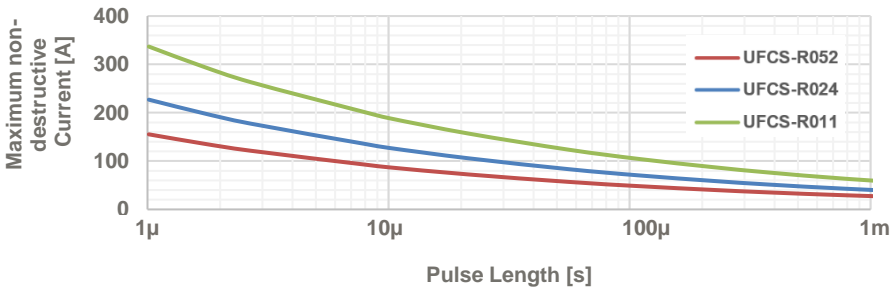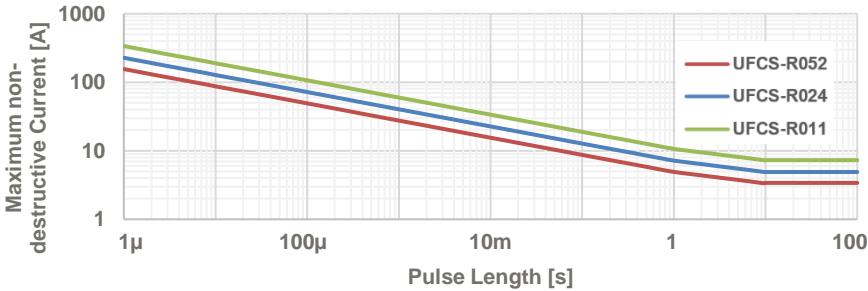

Frequency Response

UFCS-R0XX Frequency Response (Preliminary Calculated Data)

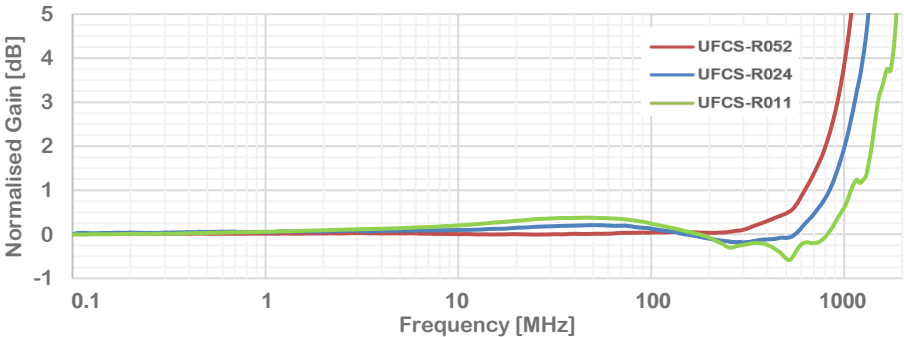

The Frequency Response graphs are normalised to 0 dB for better comparison.



Scope of Delivery

See chapter “Ordering Information” to review the selection of accessories for connections to different measuring instruments.

UFCS series shunt

Instruction manual

Ordering Information

First deliveries of the models UFCS-R001 and UFCS-R005 are planned for Q4-2025, the others in Q3.



Step 1: Select the Shunt

Each resistance model is available as a single pack or as more cost-effective packs of 10 or 25 pieces.

UFCS-R001	1m Ω , >600MHz bandwidth, <200pH insertion inductance, TBD A maximum pulse current, SMA (F) output, 1pc. Also available as packs: 10pcs UFCS-R001x10 , 25pcs UFCS-R001x25
UFCS-R005	5m Ω , >800MHz bandwidth, <200pH insertion inductance, TBD A maximum pulse current, SMA (F) output, 1pc. Also available as packs: 10pcs UFCS-R005x10 , 25pcs UFCS-R005x25
UFCS-R011	11m Ω , >1GHz bandwidth, <200pH insertion inductance, 104A maximum pulse current @ 100 μ s, SMA (F) output, 1pc Also available as packs: 10pcs UFCS-R011x10 , 25pcs UFCS-R011x25
UFCS-R024	24m Ω , >1GHz bandwidth, <200pH insertion inductance, 70A maximum pulse current @ 100 μ s, SMA (F) output, 1pc Also available as packs: 10pcs UFCS-R024x10 , 25pcs UFCS-R024x25
UFCS-R052	52m Ω , >900MHz bandwidth, <200pH insertion inductance, 48A maximum pulse current @ 100 μ s, SMA (F) output, 1pc Also available as packs: 10pcs UFCS-R052x10 , 25pcs UFCS-R052x25

Step 2: Select Output Connection Accessories

Different output connection accessories are available for either use the shunt as input for optically isolated probes or for direct electrical connection to an oscilloscope because the shunt is no stand-alone measuring instrument.

018-291-970	SMA plug to MMCX socket, 50 Ω Adapter for use with FireFly® optically isolated probe series' input tip cables with integrated 50 Ω feed-through.	
UFCS-CHOKE	50 Ω impedance matched, common mode choke with a high permeability nanocrystalline core for increasing CMRR (<i>specs to follow</i>), preventing issues with unexpected ground loops and common mode noise. SMA (male) in, BNC (male) out, for use with UFCS shunts only	
D010031	50 Ω BNC feed-through for 1 M Ω input oscilloscopes, >500MHz	



Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Copyright © 2025 PMK - All rights reserved.

Information in this publication supersedes that in all previously published material.
Specifications are subject to change without notice.

Informationen in dieser Anleitung ersetzen die in allen bisher veröffentlichten Dokumenten.
Änderungen der Spezifikationen vorbehalten.



ES France - Département Tests & Mesures
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 45
Fax. 01 47 01 16 22



e-mail : tem@es-france.com
Site Web : www.es-france.com