


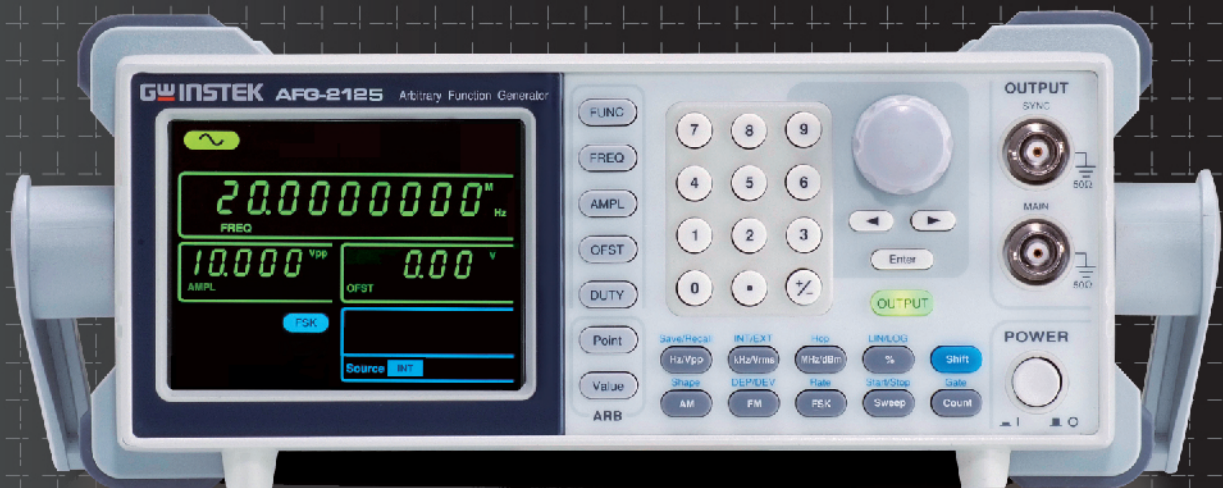

AFG-2000 Series

Arbitrary Function Generator

FEATURES

- 0.1Hz ~ 5/12/25 MHz with 0.1Hz Resolution
- Sine, Square, Pulse, Ramp, Triangle, Noise, DC and Arbitrary Waveform
- 20MSa/s Sampling Rate, 10 bit Vertical Resolution and 4k point Memory for Arbitrary Waveform
- 1% ~ 99% Adjustable Duty Cycle for Square Waveform
- Waveform Parameter Setting Through Numeric Keypad Entry & Knob Selection
- Amplitude, DC Offset and Other Key Setting Information Shown on the 3.5" LCD Screen Simultaneously
- AM/FM/FSK Modulation, Sweep, and Frequency Counter Functions (AFG-2100 only)
- USB Device Interface for Remote Control and Waveform Editing
- PC Arbitrary Waveform Editing Software

GW INSTEK
Simply Reliable

(ES) Equipements Scientifiques SA - Département Tests & Mesures - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 45 - Fax. 01 47 01 16 22 - e-mail: tem@es-france.com - Site Web: www.es-france.com



1. 3.5 Color LCD Panel
2. General Function Keys
3. Arbitrary Function Keys
4. Number Pad
5. Scroll Knob & Selection Key
6. Output Terminals
7. Main Output Switch
8. Power Switch
9. Operation Keys
10. Trigger, Modulation & Counter Input
11. Modulation Output
12. USB Device

Innovation and Value in Waveform Design

The AFG-2100/2000 Series Arbitrary Function Generator is a DDS (Direct Digital Synthesized) based signal generator designed to accommodate the Educational and Basic Industrial requirements for an accurate and affordable signal source covering the output of Sine, Square, Pulse, Ramp, Triangle, Noise, DC and Arbitrary Waveforms. The 20MSa/s sampling rate, 10 bit vertical resolution and 4k point memory of the AFG-2100/2000 Series provide user with a flexible environment for creating the specific waveform output as needed. The 0.1Hz resolution of Sine, Square and Triangle waveforms and the 1% ~ 99% adjustable duty cycle of Square (Pulse) waveform are the remarkable features to greatly extend its application range in various fields. The AFG-2100/2000 Series includes 6 models in three frequency bands of 5MHz, 12MHz and 25MHz. Besides the basic features of the whole AFG-2100/2000 Series, AFG-2100 carries additional features of AM/FM/FSK Modulation, Sweep, and Frequency Counter.

The friendly human interface of AFG-2100/2000 Series allows user to set waveform parameters, including waveform type, frequency, amplitude, DC offset, modulation type, and duty cycle, through keypad entry and/or the knob selection, and display the set parameters on the 3.5" LCD screen. The AFG-2100/2000 Series is equipped with a USB Device interface for remote control and waveform editing through a PC. A waveform editing software is provided to facilitate the waveform creation on the PC. After the waveform editing is done, the user is able to download the waveform data from PC to the AFG-2100/2000 Series for signal output.


A. BUILT-IN ARBITRARY WAVEFORM FUNCTION



In addition to the high accuracy and high stability DDS Function Waveforms-Sine, Square and Ramp, the AFG-2100/2000 Series also provides the feature to generate Arbitrary Waveforms as what user wants.

waveform memory allow user to create the needed waveform point by point through keypad entry on the front panel, or to do waveform editing on the PC and download the waveform data to the AFG-2100/2000

B. 1% ADJUSTABLE DUTY CYCLE OF SQUARE WAVE

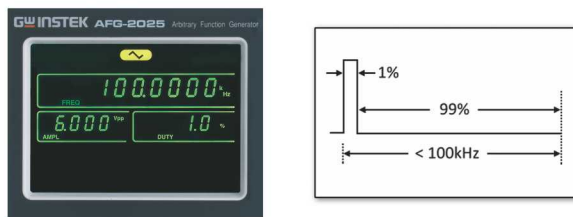

1% Duty Cycle of Square Wave Setting

For most conventional Function Generators, the adjustable duty cycle falls in a limited 20% ~ 80% range, which may not fit the demands of specific applications. The AFG-2100/2000 is able to provide a 1%~99% variable duty cycle for its Square waveform and 0%~100% variable symmetry for the Ramp. This allows the AFG-2100/2000 to be used as a Pulse Generator to create pulse waveform simulating a spike signal or a transient signal.

D. AMPLITUDE & DC OFFSET DISPLAY



Parameter Display

With the 3.5" LCD, the AFG-2100/2000 is able to show output waveform amplitude, DC offset and other key setting information simultaneously. This provides the convenience for user to know what signal is being sent out at the output terminal without the need to check the waveform through an oscilloscope.


C. FULLY DIGITAL ENTRY DESIGN



Fully Digital Keypad Operation

The conventional analog knob is not accurate enough for precision setting of waveform parameters, and may generate noise to interfere the system operation. The keypad entry design of AFG-2100/2000 improves the setting uncertainty and therefore significantly increases the accuracy of its waveform output. Besides, there is a Main Output switch which controls the main signal ON/OFF status. When a parameter, like output amplitude, is intended to be changed, user can turn off the output signal to avoid damaging the DUT.

E. AM/FM/FSK MODULATION, SWEEP & FREQUENCY COUNTER



Sweep Waveform


All AFG-2100 models are equipped with additional AM/FM/FSK Modulation, Sweep & Frequency Counter functions. The AM/FM modulated signal provides a means for basic modulation circuit tests and experiments, and the FSK modulated signal offers the signal source of the most common digital modulation signal. The Sweep function adequately fits a lot of basic applications such as sweep-tone test for the speaker in audio frequency range. The built-in frequency counter is able to measure the frequency of an external signal up to 150MHz, which saves the cost of purchasing a frequency counter.

F. USB INTERFACE & ARBITRARY WAVEFORM EDITING PC SOFTWARE



USB Device Interface

The AFG-2100/2000 Series provides a USB Device Interface, which allows the programming of remote control or ATE of the product. An arbitrary waveform editing PC software can generate the waveform by hand drawing, recalling and tailoring waveforms including Rayleigh, Gaussian, Normal Noise, Pseudo Ternary, Bipolar AMI, Manchester,

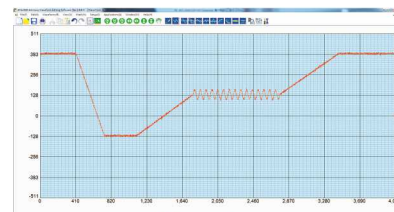

Arbitrary Waveform Editing PC Software

Besides, this software can import CSV format file as waveform data which is created by the other tools. After the waveform editing is completed on the PC, the waveform data can be downloaded through USB Interface to the AFG-2100/2000 for arbitrary waveform output. The software fits for both AFG-2100/2000 and 3000 series and can be

SPECIFICATIONS								
		AFG-2100 Series			AFG-2000 Series			
MODELS			AFG-2105	AFG-2112	AFG-2125	AFG-2005	AFG-2012	AFG-2025
WAVEFORMS			Sine, Square, Pulse, Ramp, Triangle, Noise, DC and Arbitrary Waveform					
ARITRARY FUNCTION	Sample Rate		20MSa/s					
	Repetition Rate		10MHz					
	Waveform Length		4k point					
	Amplitude Resolution		10 bit					
FREQUENCY CHARACTERISTICS	Range	Sine/Square	0.1Hz~5MHz	0.1Hz~12MHz	0.1Hz~25MHz	0.1Hz~5MHz	0.1Hz~12MHz	0.1Hz~25MHz
	Resolution	Ramp	0.1Hz ~ 1MHz					
	Accuracy	Sine,Square,Ramp	0.1 Hz					
		Stability	±20ppm					
		Aging	±1ppm, per 1 year					
		Tolerance	≤1mHz					
OUTPUT CHARACTERISTICS	Amplitude	Range	1mVpp~10Vpp(into 50Ω) , 0.1Hz~20MHz; 2mVpp~20Vpp(open-circuit) , 0.1Hz~20MHz					
		Accuracy	1mVpp~5Vpp(into 50Ω) , 20MHz~25MHz; 2mVpp~10 pp(open-circuit) , 20MHz~25MHz					
		Resolution	±2% of setting ±1mVpp;(at 1kHz,>10mVpp)					
		Flatness	1mV or 3digits					
			±1%(0.1dB)≤ 100kHz; ±3%(0.3dB)≤ 5MHz; ±4%(0.4dB)≤ 12MHz; ±20%(2dB)≤ 20MHz;					
			±5%(0.4dB)≤ 25MHz; (sine wave relative to 1 kHz)					
		Units	Vpp, Vrms, dBm					
	Offset	Range	±5Vpk ac+dc(into 50Ω); ±10Vpk ac+dc(open circuit); ±2.5Vpk ac+dc(into 50Ω) for 20MHz~25MHz; ±5Vpk ac+dc(open circuit) for 20MHz~25MHz					
		Accuracy	2% of setting + 5mV+ 0.5% of amplitude					
	Waveform Output	Impedance	50Ω typical (fixed); >300kΩ (output disabled)					
		Protection(main output)	Short-circuit protected ; Overload relay auto matically disables main output					
	SYNC Output	Level	TTL-compatible into >1kΩ					
		Impedance	50Ω nominal					
		Rise or Fall Time	≤ 25ns					
SINE WAVE CHARACTERISTICS	Harmonic Distortion		-55 dBc DC ~ 200kHz, Ampl > 0.1Vpp; -50 dBc 200kHz ~ 1MHz, Ampl > 0.1Vpp -35 dBc 1MHz ~ 5MHz, Ampl > 0.1Vpp; -30 dBc 5MHz ~ 25MHz, Ampl > 0.1Vpp					
SQUAREWAVE CHARACTERISTICS	Rise/Fall Time	≤ 25ns at maximum output (into 50Ωload)						
	Overshoot	< 5%						
	Asymmetry	1% of period+1 ns						
	Variable Duty Cycle	1%~99%≤100kHz ; 20.0%~80.0%≤5MHz ; 40.0%~60.0%≤10MHz ; 50%≤25MHz (1% Resolution for full Frequency Range)						
RAMP CHARACTERISTICS	Linearity	< 0.1% of peak output						
	Variable Symmetry	0%~100%(0.1% Resolution)						
AM MODULATION	Carrier Waveforms	Sine, Square, Triangle						
	Modulating Waveforms	Sine, Square, Triangle						
	Modulating Frequency	2 mHz~20 kHz (Int); DC~20KHz (Ext)				—		
	Depth	0%~120.0%						
	Source	Internal/External						
FM MODULATION	Carrier Waveforms	Sine, Square, Triangle						
	Modulating Waveforms	Sine, Square, Triangle						
	Modulating Frequency	2 mHz~20 kHz (Int); DC~20KHz (Ext)				—		
	Deviation	DC to Max Frequency						
	Source	Internal/External						
SWEEP	Waveforms	Sine, Square, Triangle						
	Type	Linear or Logarithmic						
	Start/Stop Frequency	0.1Hz to Max Frequency				—		
	Sweep Time	1ms~500s						
	Source	Internal/External						
FSK	Carrier Waveforms	Sine, Square, Triangle						
	Modulating Waveforms	50% duty cycle square						
	Internal Rate	2mHz~20kHz				—		
	Modulation Rate	2mHz~100kHz(INT); DC~100kHz(Ext)						
	Frequency Range	0.1Hz~Max Frequency						
	Source	Internal/External						
FREQUENCY COUNTER	Range	5Hz~150MHz						
	Accuracy	Time Base accuracy ± 1count						
	Time base	±20ppm(23°C±5°C) after 30minutes warm up				—		
	Resolution	100nHz for 1Hz, 0.1Hz for 100MHz						
	Input Impedance	1KΩ/1pf						
	Sensitivity	35mVrms~30Vrms (5Hz~150MHz)						
STORE/RECALL	10 Groups of Setting Memories							
INTERFACE	USB(Device)							
DISPLAY	LCD							
POWER SOURCE	AC100 ~ 240V , 50 ~ 60Hz							
POWER CONSUMPTION	25 VA							
OPERATING ENVIRONMENT	Temperature to satisfy the specification: 18~28°C; Operating temperature: 0~40°C Relative Humidity: ≤80%, 0~40°C; ≤70%, 35~40°C; Installation category: CAT II							
OPERATING ALTITUDE	2000 meters							
STORAGE TEMPERATURE	-10~70°C, Humidity: ≤70%							
DIMENSIONS & WEIGHT	266(W)×107(H)×293(D) mm ; Approx. 2.5 kg							

Specifications subject to change without notice. FG-2000GD3BH

ORDERING INFORMATION		ACCESSORIES	
AFG-2005	5MHz Arbitrary Waveform Function Generator	CD (user manual + software) × 1, Quick Start Guide × 1, Power cord × 1	
AFG-2105	5MHz Arbitrary Waveform Function Generator	AFG-2100 Series - GTL-101 Test Lead × 2, Instruction Manual × 1, Power cord × 1	
AFG-2012	12MHz Arbitrary Waveform Function Generator	AFG-2000 Series - GTL-101 Test Lead × 1, Instruction Manual × 1, Power cord × 1	
AFG-2112	12MHz Arbitrary Waveform Function Generator		
AFG-2025	25MHz Arbitrary Waveform Function Generator		
AFG-2125	25MHz Arbitrary Waveform Function Generator		
		OPTIONAL ASSESSORIES	
		GTL-246	USB Cable, USB 2.0 Type A - Type B, 4P
		FREE DOWNLOAD	
		PC Software	Arbitrary Waveform Editing Software Driver USB driver