


# PPM-350D PON Power Meter

TEST ANY PON TECHNOLOGY WITH ONE INTELLIGENT INSTRUMENT



PON-aware™

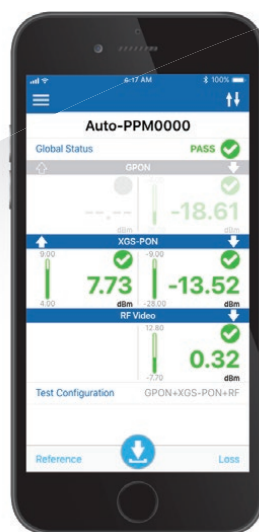

Available for iOS® and Android™

Feature(s) of this product is/are protected by US Patents 7,187,861, 7,995,915 and 8,861,953 and pending application(s); Chinese patent 200480022721.7; Chinese pending patent CN1102611497A; European Patent 1,673,881 and associated national entries in numerous European countries; German Utility Patent 202004021208.0; Russian Federation Patent 2,345,490; and/or Canadian Patent 2,541,838.

This intelligent PON power meter automatically detects and adapts test parameters to the PON technology in use at the customer premises, thanks to its groundbreaking, patented PON-aware™ capability.

SPEC SHEET

## KEY FEATURES

- Unique PON-aware™ capability automatically detects PON technology in use
- Compatible with GPON and EPON networks
- Supports 10G-capable PON networks
- Pass-through mode for ONT/ONU verification
- Bluetooth® and USB connectivity
- Smart app to store and share test results, create test reports
- Compact, rugged and designed to comply with the IP54 enclosure standard
- Rechargeable battery lasts for up to 8 hours of continuous use

## APPLICATIONS

- Single-layer PON service activation
- Multi-layer PON service activation
- Insertion loss testing
- Multiple PON technologies supported on a single unit:
  - BPON (ITU-T G983.3)
  - GPON (ITU-T G984.2)
  - EPON (IEEE 802.3)
  - XG(S)-PON (ITU-T G987.2)
  - TWDM NG-PON2 (ITU-T G989.2)
  - RF overlay
  - RFoG (ANSI/SCTE 174 2010)

## COMPLEMENTARY PRODUCTS



Fiber Inspection Probe  
FIP-400B Wireless

Android is a trademark of Google Inc.  
iOS is a registered trademark of Cisco System, Inc. and/or its affiliates in the U.S. and certain other countries.

EXFO

## NEXT-GENERATION PON COMPLIANT

Next-generation passive optical networks (PONs) will, in most cases, leverage the existing outdoor plant infrastructure already in use for current PON customers. This adds a level of complexity to PON testing since multiple wavelengths will reach the end user at the service activation location. Having the right instrument is vital to avoid meaningless test results or false positives.

EXFO's PPM-350D can be used in legacy and next-generation PON scenarios. It is compatible with single-layer PON and RF overlays as well as mixing a next-generation layer on top of it. The PPM-350D affords the unique ability to test several next-generation PON technologies (XGS-PON, NG-PON2) with a single unit. With the same PPM-350D test unit you can tackle today's increasing field complexities and you are already equipped for tomorrow's PON challenges.

## PON-AWARE TECHNOLOGY

Deploying a mix of legacy and next-generation equipment? No problem. By relying on pre-configured and customizable test configurations, the PPM-350D automatically detects the type of network under test and self-adjusts the pass/fail criteria for error-free testing.

## EQUIPEMENT AND MOBILE APP OVERVIEW



*Example of a triple layer network with GPON, XGS-PON and an RF video overlay. PON-aware™ technology helps technicians validate the service activation for GPON and XGS-PON customers with a single test configuration. The PON-aware™ feature automatically detects the service being activated and provides a clear pass/fail status according to that service.*



## REPORTING

Create complete service activation reports directly from your mobile device.

## LOSS TESTING

On top of using it for PON service activation, the PPM-350D can be used to measure insertion loss (IL) of fiber networks using a portable light source or the PON system transmit cards of the optical line terminal (OLT) at the central office. The PPM-350D and the mobile application feature a loss testing mode to take a reference for accurate IL measurement of the fiber under test.



The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc.  
Android is a trademark of Google Inc.  
iOS is a registered trademark of Cisco System, Inc. and/or its affiliates in the U.S. and certain other countries.


**EXFO**

## FIBER CONNECTOR INSPECTION AND CERTIFICATION – THE ESSENTIAL FIRST STEP BEFORE ANY OPTICAL TESTING

Taking the time to properly inspect a fiber optic connector using an EXFO fiber inspection probe can prevent a lot of issues from arising further down the line, thus saving you time, money and trouble. Moreover, using a fully automated solution with autofocus capabilities will turn this critical inspection phase into a fast and hassle-free one-step process.

## DID YOU KNOW THAT THE CONNECTOR OF YOUR TEST INSTRUMENT IS ALSO CRITICAL?

The presence of a dirty connector at a test instrument port or test jumpers can negatively impact your test results, and even cause permanent damage during mating. Therefore, it is critical to regularly inspect these connectors to ensure that they are free of any contamination. Making inspection the first step of your optical testing is a best practice that will maximize the performance of your instrument and your efficiency.

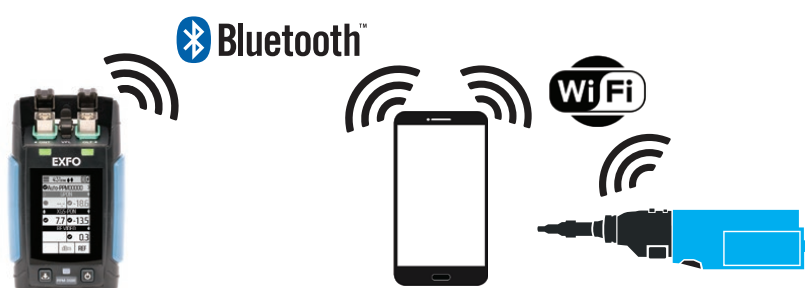

FEATURES	WIRELESS	
	Semi-automated FIP-425B	Fully automated FIP-435B
Three magnification levels	✓	✓
Image capture	✓	✓
Five-megapixel CMOS capturing device	✓	✓
Automatic fiber image-centering function	✓	✓
Automatic focus adjustment	✗	✓
On-board pass/fail analysis	✓	✓
Pass/fail LED indicator	✓	✓
WiFi connectivity	✓	✓

## THREE PON OPTIONS

Available in three options, this instrument is tailored to fit your needs. Choose between single- or dual-layer PON testing and RF overlay supporting RF video.



	UPSTREAM (nm)	DOWNSTREAM (nm)	PPM-350D-SR	PPM-350D-D	PPM-350D-DR
BPON (ITU-G983.3)	1310	1490	✓	✓	✓
GPON (ITU-T G984.2)	1310	1490	✓	✓	✓
1G EPON (IEEE 802.3)	1310	1490	✓	✓	✓
XG/XGS-PON (ITU-T G987.2)	1270	1578		✓	✓
TWDM NG-PON2 (ITU-T G989.2)	1524 to 1544	1596 to 1603		✓	✓
10G EPON (IEEE 802.3)	1270	1577		✓	✓
RF video overlay		1550	✓		✓
RFoG (ANSI/SCTE 174 2010)	1310 or 1610	1550	✓		✓

**EXFO**

## VISUAL FAULT LOCATER OPTION

The PPM-350D's optional visual fault locator (VFL) enables quick and easy troubleshooting to identify breaks, bends and faulty connectors or splices, as well as other causes of signal loss. This valuable option helps you shorten time-to-restoration cycles and increase the productivity of your field crews.

FTTX SPECIFICATIONS					
		Spectral passband (nm)	Power measurement range (dBm)	Calibrated wavelength (nm)	Maximum total safe power (dBm)
ONT/ONU	Upstream 1270 nm, burst mode	1260 to 1280	−10 <sup>a</sup> to 13	1270	16
	Upstream 1310 nm, burst mode	1290 to 1330	−30 <sup>a</sup> to 13	1310	
	Upstream 1524-1544 nm, burst mode	1330 to 1630 <sup>b</sup>	−10 <sup>a</sup> to 13	1534	
	Upstream 1550 nm, burst mode	1330 to 1630	−10 <sup>a</sup> to 13	1550	
	Upstream 1610 nm, burst mode	1330 to 1630 <sup>b</sup>	−10 <sup>a</sup> to 13	1610	
OLT	Downstream 1490 nm	1480 to 1500	−50 to 13	1490	17
	Downstream 1550 nm	1540 to 1560	−35 to 26	1550	27
	Downstream 1577-1578 nm	1573 to 1630	−50 to 17	1578	20
	Downstream 1596-1603 nm	1573 to 1630	−50 to 17	1600	
	Downstream 1610 nm	1573 to 1630	−50 to 17	1610	
ORL (dB)	60 <sup>a, c</sup>				
Pass-through insertion loss (dB)	1.5 <sup>a</sup>				
Power Uncertainty (dB)	0.5 <sup>a, d</sup>				

### Notes

- a. Typical, at 23 °C ± 3 °C and with SC/APC connectors.  
 b. For model PPM-350D-DR, 1555 nm ± 5 nm is excluded from the spectral passband.  
 c. At calibrated wavelength.  
 d. At input level 2 dBm, CW.

### VISUAL FAULT LOCATOR (VFL) (OPTIONAL)

Laser, 650 nm ± 10 nm

CW/Modulate 1 Hz

Typical P<sub>out</sub> in 62.5/125 µm: > -1.5 dBm (0.7 mW)

Laser safety: Class 2

### LASER SAFETY



## GENERAL SPECIFICATIONS

<b>Storage capacity</b>	up to 3500 results
<b>Battery autonomy</b>	8 hours of continuous use
<b>Battery charge time</b>	< 2 hours
<b>Display resolution</b>	0.01 dBm
<b>Measurement units</b>	dB, dBm
<b>Dimensions (H x W x D)</b>	154 mm x 88 mm x 41 mm (6 1/16 in x 3 1/2 in x 1 5/8 in)
<b>Display size</b>	69 mm (2.7 in)
<b>Weight</b>	420 g <sup>a</sup>
<b>Display type</b>	Reflective
<b>Display pixel count</b>	400 x 240
<b>Operating temperature range</b>	0 °C to 50 °C
<b>Storage temperature range</b>	-40 °C to 70 °C
<b>Connector</b>	USB type C
<b>Connectivity</b>	Bluetooth low energy
<b>Smart device OS compatibility</b>	Android 6 and above, iOS 11 and above

## Note

a. PPM-350D-SR model

## STANDARD ACCESSORIES INCLUDED

Instruction manual (soft copy)  
 Certificate of calibration (hard copy)  
 GP-2269: USB-A to USB-C cable  
 GP-2227: USB AC adapter  
 GP-2275: Wrist strap  
 GP-2274: Protective cover for optical ports  
 GP-2277: Rechargeable battery  
 GP-10-071: Soft carrying case

## ORDERING INFORMATION

PPM-350D-XX-XX-XX

## Model ■

## PON option ■

SR = Single PON layer and RF video  
 D = Dual PON layer  
 DR = Dual PON layer and RF video

## VFL option ■

00 = Without visual fault locator  
 VFL = With visual fault locator

Example: PPM-350D-DR-VFL-EA-EUI-91

## Connectors ■

EA-EUI-28 = APC/DIN 47256  
 EA-EUI-89 = APC/FC narrow key  
 EA-EUI-91 = APC/SC  
 EA-EUI-95 = APC/E-2000  
 EA-EUI-98 = APC/LC