

Grid Emulator Plus

CINERGIA's Grid Emulators are programmable Voltage Sources designed to create stable AC grids as well as electrical disturbances. Based on a Regenerative and Bidirectional power hardware it is a key device for testing Renewable Energy Sources (PV, WT, CHP) and grid connected devices.

Key features

Bidirectional and Regenerative
Clean grid current: THDi < 3% and PF > 0.98

13 models from 6.75kW to 160kW
Parallelization of units to increase the power
Voltage Range: up to 277Vrms (295Vrms with HV)

3 versions: AC only, Power Amplifier for PHIL, AC/DC

Generation of Worldwide electrical grids:
3-phase/ 1-phase/ split phase / Multichannel
Independent phase configuration of:
voltage rms, phase angle, frequency and harmonics
Generation of disturbances:
harmonics, interharmonics, subharmonics, voltage dips, frequency variation, flicker
Disturbance Generation Editor compatible with IEC, LVRT, SEMI-F47, CBEMA test standards

Intuitive User Interface Software
Modbus/Ethernet Open protocol, Labview drivers



Highlights

Efficiency and Flexibility

GE+ units efficiently convert AC to AC with Regenerative capability. The system has been specially designed to bring a high level of flexibility to testing featuring independent configuration of each output phase: magnitude, phase, frequency, harmonics, ramps, voltage dip rise/fall along with a comprehensive set of alarms and limits for EUT protection.

Harmonics Generation

The PLUS series comes with an improved control of harmonics based on resonant controllers. The fundamental frequency is individually set on each phase and the user can control, for each phase, the multiple harmonics up to the 15th and one free harmonic to create sub/inter/high frequency harmonics up to the 50th.


High-Resolution and Dynamics

The fully-digital DSP-based control system is based on a 300kHz oversampling of the currents and voltages. This data is processed to provide high-resolution and low-noise measurements enabling the Proportional-Resonant Controllers to produce accurate outputs and fast transients.

Smooth Integration

All models integrate the electrical protections, terminal blocks, local touchscreen, analogue and digital I/O, local emergency stop pushbutton as well as input/output emergency signals for the general interlock system. Interfacing remotely a unit is simple by using the Modbus Ethernet connection (open protocol). User Interface Software and Labview drivers supplied.


Bidirectional and Regenerative Hardware

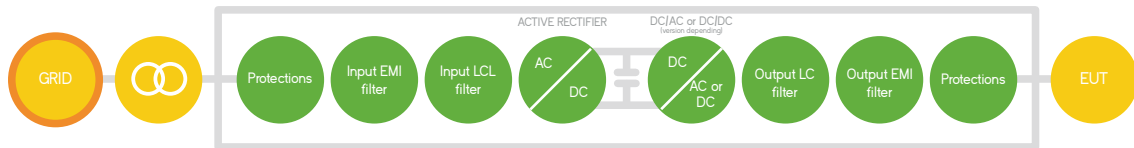

The hardware platform is based on a Back-to-Back power conversion topology, formed by two IGBT-based power stages. The grid side stage is an Active Rectifier which produces clean sinusoidal currents with very low harmonic distortion and power factor close to one.

The EUT side stage is a three-leg Inverter which allows for the generation and control of three independent AC voltages with programmable amplitude, phase angle, frequency and harmonic content by using state of the art digital Proportional-Resonant controllers.

Block diagram

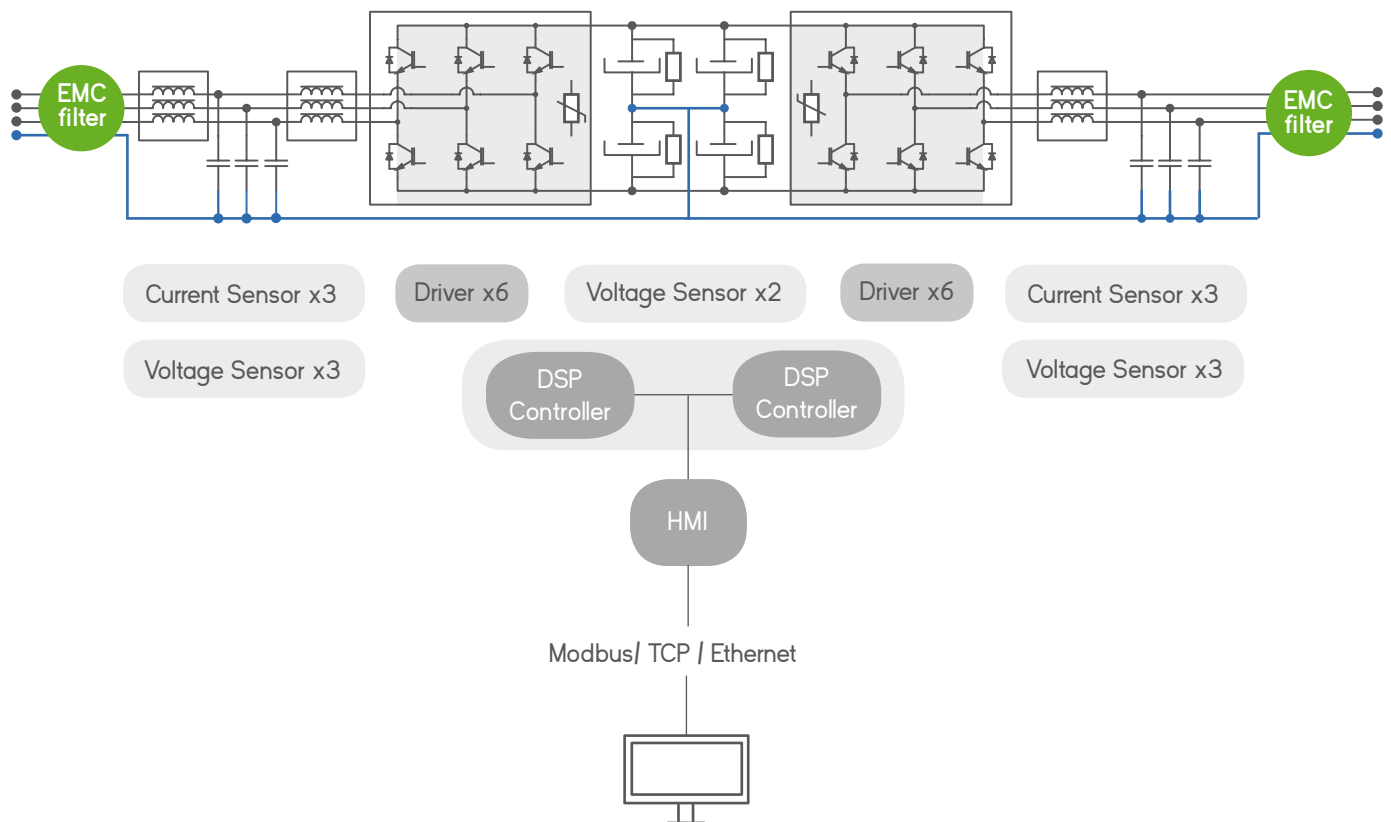

Local Interface

Analogue and Digital IO ports

The isolated digital and analogue inputs/outputs permit the connection of the unit to External Controllers and (option) Power Hardware in the Loop systems

4.3" Touchscreen

Allows the local parameterization and command of the device, configuration of the communications link, plots the main signals and enables the local datalogging


Safety First

The units integrate a local Emergency Stop pushbutton and two signals (input + output) to be connected to the laboratory interlock system. Additionally, the digital outputs can be interfaced to safety tower lights.



Software Interface

The User Interface (UI) software has been carefully designed for an intuitive use while providing access to the more advanced functionalities and performances required to match the test necessities. The Grid Emulator has specific panels to configure independently the output voltage waveform, the transition ramps and the distortion of each phase. The Disturbance Generation Editor has been developed to create, save and import specific test profiles compatible with IEC, SEMI-F47, LVRT, etc...). The user can also program the Alarms and Limits of the converter and save them to an EEPROM (password protected).

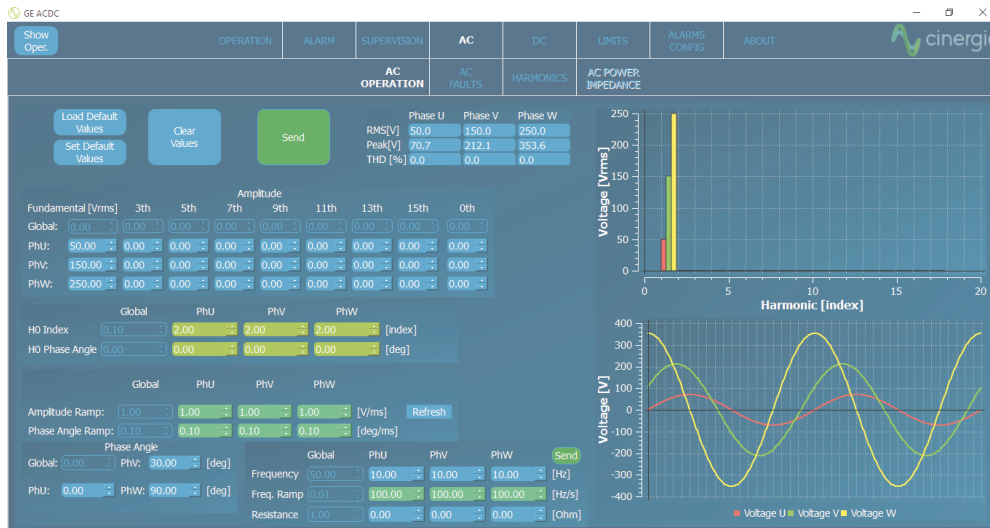

AC Operation

In this panel each phase can be independently configured: rms current magnitude, phase delay, harmonics content, free-frequency harmonic and transition ramps. A plot shows the expected real time waveform, the FFT representation and the numeric data: rms, peak, CF and THD.



Harmonics

The GE+ uses resonant controllers to accurately create the programmed harmonic content. Each phase can be independently parameterized with a fundamental frequency, all multiple harmonics (up to the 15th) and one free harmonic (up to the 50th). Waveforms can be saved and imported in csv files and launched in a sequence.



Disturbance Generation

A powerful yet intuitive Editor allows generating and configuring voltage dips, frequency variation and flicker both manually or in a step sequence. Specific profiles can be saved in csv files, modified, and reused by importing an existing csv file.

Range and specifications

Input side (GRID side)

AC Voltage

Rated: 3x400Vrms + Neutral + Earth

Range: +15% / -20%

Rated AC Current

Depends on model (see Wiring Manual)

Frequency

48-62Hz

Current Harmonic Distortion

THDi < 3% at rated power

Current Power factor

PF > 0.98 at rated power

Efficiency

≥ 89% (7.5&10), ≥ 91% (15 to 30), ≥ 92% (40 to 200)

Output side (EUT side)

Terminals

Number: 4 (3 phases + 1 neutral)

Configuration

Independent: 4Q, independent setpoints per phase

Parallel: 4Q, global setpoints for all phases

Multichannel: 4Q, independent start/stop, alarm status and setpoints per phase (note: multichannel is an option for ≥ 80kVA)

Voltage

Peak: ± 400V phase-neutral

Range: 0⁽¹⁾ to 277Vrms phase-neutral (295Vrms with HV option)

0⁽¹⁾ to 480Vrms phase-phase (510Vrms with HV option)

THDv: < 0.1% rated linear load at 230Vrms, 50/60Hz

< 0.9% rated non linear load CF=3 at 230Vrms, 50/60Hz

Setpoint Resolution: 10mVrms

Effective Resolution⁽²⁾: < 0.05% of FS⁽³⁾

Setpoint Accuracy⁽⁴⁾: ± 0.1% of FS⁽³⁾

Transient Time⁽⁵⁾: < 1ms (10% to 90% at a step to Vrated)

Ripple⁽⁶⁾ (peak-peak): < 0.55% of FS⁽³⁾

Phase Angle

Range: 0 to 360°

Resolution: 0.01°

Frequency

Fundamental Frequency Range: 10 to 100Hz (up to 400Hz as option)

Small Signal Bandwidth: up to 5000Hz⁽⁷⁾

Resolution: 10mHz (1mHz upon request)

Harmonics

Range: up to 50th

15 independent harmonics per phase:

14 fixed frequency multiple of f_0 : 2,3,4,5,6,7,8,9,10,11,12,13,14,15

1 free programmable frequency from 0.1 to 50 times f_0

Harmonics content: $V_f < 46000$ (with current derating)

Setpoint Accuracy⁽⁴⁾: same as voltage accuracy

Transient Time⁽⁵⁾: < 2ms (10% to 90% at a step change)

All specifications are subject to change without notice.

(1) The recommended minimum setpoint for long-term use is 20Vrms

(2) Effective resolution measured with a 400ms window

(3) FS Range of voltage is 800V

FS Range of current is 2 | 3 · Irated | (see models table)

FS Range of power is 2 | 200% · Prated | (see models table)

(4) Accuracies are valid for settings above 10% of FS

Modes of operation

Version AC-only

CV: AC-only Programmable Voltage Source

Version Power Amplifier

CV: AC or DC Programmable Voltage Source

Power Amplifier

Optional: DC current/power/resistance, BatTest, BatEmu, PVEmu

Version AC/DC

CV: AC or DC Programmable Voltage Source

Power Amplifier

DC current/power/resistance, Battery Test

Optional: Battery Emulation, PV Panel Emulation

All versions: AC Disturbance Generation Mode, Automated testing from .csv file

Protections

Overvoltage (peak, rms), Overcurrent⁽¹⁾⁽¹²⁾ (peak, rms), Overload⁽¹⁰⁾

Shortcircuit, Emergency Stop, Watchdog, Heart

Beat, Output Contactor

Alarms and Limits are user configurable and can be saved in a password protected EEPROM

Measurements⁽⁸⁾

Grid Voltage (rms), Current (rms), Power (P,Q) and Frequency

Output Voltage (rms), Current (rms), Power (P,Q) and Frequency

Heatsink Temperatures (x2) and DC Link Voltage

Datalogging available through FTP connection

User Interface

Local Control (4.3" Touchscreen panel)

Isolated Digital IO port: 6 inputs, 4 outputs

Isolated Analogue IO port: 6 inputs, 6 outputs

Interlock IO port: 1 input, 1 output

Emergency Stop pushbutton

Remote Control port:

LAN Ethernet with Open Modbus-TCP protocol

RS485, RS232, CANbus (optionals)

Software:

Graphical User Interface for Windows 7/10

LabView drivers and basic Labview interface example

Ambient

Operating temperature⁽⁹⁾: 5-40°C

Relative Humidity: up to 95%, non-condensing

Cooling: Forced air

Acoustic noise at 1m: < 52dB(A) (7.5 to 60), < 65dB(A) (80 to 120), < 70dB(A) (160 and 200)

Standards

CE Marking

Operation: EN-50178

Safety: EN-60950-1, EN-62040-1-2

EMC: EN-62040-2

(5) Measured with the rated resistive load and high-dynamics controllers configuration

(6) Consult us for lower voltage/current ripple requirements

(7) The maximum output voltage depends on frequency following $V_f < 46000$

(8) Accuracy of measurements is ±0.1% of FS for rms voltage, ±0.2% of FS for rms current, ±0.4% of FS for active power (valid only above 10% of FS)

(9) Rated power figures are given at 20°C. See (9) for admissible Overloads

Models

GE+ (AC only version)

| Model | Version | AC Power Rated ⁽¹⁰⁾ | DC Power Rated ⁽¹⁰⁾ | AC Current Rated ⁽¹¹⁾ RMS Per phase / Global | DC Current Rated ⁽¹²⁾ DC Per phase / Global | Weight | Dimensions (DxWxH) |
|--------|---------|-----------------------------------|-----------------------------------|---|--|--------|--------------------|
| GE+7.5 | vAC | 7.5 kW | - | 11A / 33A | - | 150 kg | 770x450x1100 mm |
| GE+10 | vAC | 10 kW | - | 15A / 45A | - | 150 kg | 770x450x1100 mm |
| GE+15 | vAC | 15 kW | - | 22A / 66A | - | 150 kg | 770x450x1100 mm |
| GE+20 | vAC | 20 kW | - | 29A / 87A | - | 150 kg | 770x450x1100 mm |
| GE+30 | vAC | 27 kW | - | 40A / 120A | - | 150 kg | 770x450x1100 mm |
| GE+40 | vAC | 40 kW | - | 58A / 174A | - | 185 kg | 770x450x1100 mm |
| GE+50 | vAC | 50 kW | - | 73A / 219A | - | 185 kg | 770x450x1100 mm |
| GE+60 | vAC | 54 kW | - | 80A / 240A | - | 185 kg | 770x450x1100 mm |
| GE+80 | vAC | 80 kW | - | 116A / 348A | - | 265 kg | 880x590x1320 mm |
| GE+100 | vAC | 100 kW | - | 145A / 435A | - | 290 kg | 880x590x1320 mm |
| GE+120 | vAC | 108 kW | - | 157A / 471A | - | 290k g | 880x590x1320 mm |
| GE+160 | vAC | 145 kW | - | 211A / 633A | - | 540 kg | 850x900x2000 mm |
| GE+200 | vAC | 160 kW | - | 232A / 696A | - | 550 kg | 850x900x2000 mm |

All specifications are subject to change without notice.

GE+ (Power Amplifier version)

| Model | Version | AC Power Rated ⁽¹⁰⁾ | DC Power Rated ⁽¹⁰⁾ | AC Current Rated ⁽¹¹⁾ RMS Per phase / Global | DC Current Rated ⁽¹²⁾ DC Per phase / Global | Weight | Dimensions (DxWxH) |
|--------|---------|-----------------------------------|-----------------------------------|---|--|--------|--------------------|
| GE+7.5 | vPA-V | 7.5 kW | 3.75 kW | 11A / 33A | 5A / 15A | 155 kg | 770x450x1100 mm |
| GE+10 | vPA-V | 10 kW | 5 kW | 15A / 45A | 7.5A / 22.5A | 155 kg | 770x450x1100 mm |
| GE+15 | vPA-V | 15 kW | 7.5 kW | 22A / 66A | 10A / 30A | 155 kg | 770x450x1100 mm |
| GE+20 | vPA-V | 20 kW | 10 kW | 29A / 87A | 12.5A / 37.5A | 155 kg | 770x450x1100 mm |
| GE+30 | vPA-V | 27 kW | 13.5 kW | 40A / 120A | 15A / 45A | 155 kg | 770x450x1100 mm |
| GE+40 | vPA-V | 40 kW | 20 kW | 58A / 174A | 20A / 60A | 190 kg | 770x450x1100 mm |
| GE+50 | vPA-V | 50 kW | 25 kW | 73A / 219A | 25A / 75A | 190 kg | 770x450x1100 mm |
| GE+60 | vPA-V | 54 kW | 27 kW | 80A / 240A | 28.5A / 85.5A | 190 kg | 770x450x1100 mm |
| GE+80 | vPA-V | 80 kW | 40 kW | 116A / 348A | 52.5A / 157.5A | 270 kg | 880x590x1320 mm |
| GE+100 | vPA-V | 100 kW | 50 kW | 145A / 435A | 65A / 195A | 295 kg | 880x590x1320 mm |
| GE+120 | vPA-V | 108 kW | 54 kW | 157A / 471A | 65A / 195A | 295kg | 880x590x1320 mm |
| GE+160 | vPA-V | 145 kW | 72.5 kW | 211A / 633A | 77.5A / 232.5 | 545 kg | 850x900x2000 mm |
| GE+200 | vPA-V | 160 kW | 80 kW | 232A / 696A | 92.5A / 277.5A | 555 kg | 850x900x2000 mm |

All specifications are subject to change without notice.

(10) Admissible overloads are the following: 125% of rated value during 10 minutes, 150% of rated value during 1 minute, 200% of rated value during 2s

Overload levels can be configured by the user (to values below the factory ones) and saved in a EEPROM (password protected)

The user can configure different admissible overload levels for power sourcing and power absorbing

(11) Admissible AC Overcurrents are the following: 125% during 10 minutes, 150% during 1 minute, 200% during 2s

Admissible Peak Overcurrent is 3 times the rated current (to allow a crest factor of 3)

Overload levels can be configured by the user (to values below the factory ones) and saved in a EEPROM (password protected)

(12) Admissible DC Overcurrent is the following: 110% during 1 minute

Models

GE+ (AC/DC version)

| Model | Version | AC Power Rated ⁽¹⁾ | DC Power Rated ⁽¹⁾ | AC Current Rated ⁽¹⁾ RMS Per phase / Global | DC Current Rated ⁽²⁾ DC Per phase / Global | Weight | Dimensions (DxWxH) |
|--------|---------|----------------------------------|----------------------------------|--|---|--------|--------------------|
| GE+7.5 | vAC/DC | 7.5 kW | 7.5 kW | 11A / 33A | ±10A / ±30A | 155 kg | 770x450x1100 mm |
| GE+10 | vAC/DC | 10 kW | 10 kW | 15A / 45A | ±15A / ±45A | 155 kg | 770x450x1100 mm |
| GE+15 | vAC/DC | 15 kW | 15 kW | 22A / 66A | ±20A / ±60A | 155 kg | 770x450x1100 mm |
| GE+20 | vAC/DC | 20 kW | 20 kW | 29A / 87A | ±25A / ±75A | 155 kg | 770x450x1100 mm |
| GE+30 | vAC/DC | 27 kW | 27 kW | 40A / 120A | ±30A / ±90A | 155 kg | 770x450x1100 mm |
| GE+40 | vAC/DC | 40 kW | 40 kW | 58A / 174A | ±40A / ±120A | 190 kg | 770x450x1100 mm |
| GE+50 | vAC/DC | 50 kW | 50 kW | 73A / 219A | ±50A / ±150A | 190 kg | 770x450x1100 mm |
| GE+60 | vAC/DC | 54 kW | 54 kW | 80A / 240A | ±57A / ±171A | 190 kg | 770x450x1100 mm |
| GE+80 | vAC/DC | 80 kW | 80 kW | 116A / 348A | ±105A / ±315A | 270 kg | 880x590x1320 mm |
| GE+100 | vAC/DC | 100 kW | 100 kW | 145A / 435A | ±130A / ±390A | 295 kg | 880x590x1320 mm |
| GE+120 | vAC/DC | 108 kW | 108 kW | 157A / 471A | ±130A / ±390A | 295kg | 880x590x1320 mm |
| GE+160 | vAC/DC | 145 kW | 145 kW | 211A / 633A | ±155A / ±465A | 545 kg | 850x900x2000 mm |
| GE+200 | vAC/DC | 160 kW | 160 kW | 232A / 696A | ±185A / ±555A | 555 kg | 850x900x2000 mm |

All specifications are subject to change without notice.

Galvanic Isolation (optional)

| Model | | WEIGHT kg | DIMENSIONS DxWxH (mm) |
|--------|---------------|--------------|--------------------------|
| IT7.5i | Type C - 25A | 145 | Inside the cabinet |
| IT10i | Type C - 25A | 145 | Inside the cabinet |
| IT15i | Type C - 32A | 145 | Inside the cabinet |
| IT20i | Type C - 40A | 145 | Inside the cabinet |
| IT30i | Type C - 50A | 195 | Inside the cabinet |
| IT30e | Type D - 80A | 174 | 595x415x708 |
| IT40e | Type D - 100A | 217 | 789x490x865 |
| IT50e | Type D - 125A | 280 | 789x490x865 |
| IT60e | Type D - 160A | 381 | 789x490x865 |
| IT80e | Type D - 200A | 435 | 964x684x1252 |
| IT100e | Type D - 250A | 458 | 964x684x1252 |
| IT120e | Type D - 315A | 514 | 964x684x1252 |
| IT160e | Type D - 400A | 612 | 964x684x1252 |
| IT200e | Type D - 500A | 753 | 1192x744x1430 |

Note: 'i' stands for internal transformer, 'e' stands for external transformer (delivered in a stand-alone cabinet IP23)

All specifications are subject to change without notice.

Options

Galvanic Isolation

Multichannel mode (included in all models from 7.5 to 60, both included)

30kHz Switching Frequency (only available for models 15, 20 and 30. Power is derated to 7.5, 7.5 and 10kW respectively)

Isolation monitor / Anti-islanding monitor

High Voltage (HV)

RS485, RS232, CAN

Battery Emulation, PV Panel Emulation (only available for Power Amplifier and AC/DC versions)