

Intel® 4th Gen. Haswell® Core™ i7-4700EQ MIL-STD Fanless Rugged System



Extended
Temperature
+70°C
-40°C

- MIL-STD 810G Compliance
- 4th Generation Intel® Core™ i7-4700EQ Haswell Processor
- XR-DIMM up to 8 GB RAM
- Onboard uSSD SATAIII up to 64 GB
- 2 x mPCIe expansion slot (One Co-Layout with mSATA)
- 2 x PCIe Intel® Gigabit Ethernet
- 4 x USB 3.0, 1 x COM port
- 9V to 36V DC-in with power delay on/off

Specifications ►


System	
CPU	Intel® Core™ i7 Haswell , BGA type Core i7-4700EQ (4C x 2.4/1.7 GHz), 6M Cache (47W)
Chipset	Intel® QM87 PCH
Ethernet Chipset	Intel® I210IT & i217-LM GbE
Memory	1 x DDR3 1600 XR-DIMM up to 8 GB with ECC
Expansion Slot	2 x mPCIe (1 x colay with mSATA)
Storage Device	Onboard uSSD SATAIII up to 64 GB
Front I/O	
Power Button	Power Button with dual color LED backlight
Power LED	1 x Green LED
HDD LED	1 x Red LED
LAN LED	2 x Red LED, 2 Green LED
USB	2 x USB 3.0
Rear I/O	
Power	1 x Terminal Block
Ethernet	2 x RJ45
COM	1 x RS232/422/485 with 5V/12V selectable
USB	2 x USB 3.0
DVI-I	1 (Default CLOSED)
DisplayPort	2
Audio	1 x MIC, 1 x Line out

Mechanical & Environment	
Power Requirements	9V to 36V DC-in, AT/ATX mode supports with power delay on/off
Dimension(W x H x D)	308 x 149 x 59 mm
Operating Temp.	-40 to 70°C (ambient with air flow)
Storage Temp.	-40 to 85°C
Relative Humidity	5% to 95%, non-condensing
Serial Interface & Signals	
Serial Standards	1x RS-232/422/485 port, Jumper-selectable (DB9 male)
RS-232	TxD, RxD, DTR, DSR, RTS, CTS, DCD, GND
RS-422	TxD+, TxD-, RxD+, RxD-, GND
RS-485-4w	TxD+, TxD-, RxD+, RxD-, GND
RS-485-2w	Data+, Data-, GND
Standards and Certifications	
MIL-STD-810G Test	
Method 507.5, Procedure II (Temperature & Humidity)	
Method 514.6, Procedure I (Category 20 & 24, Vibration)	
Method 516.6, Procedure I (Mechanical Shock)	
Method 501.5, Procedure I (Storage/High Temperature)	
Method 501.5, Procedure II (Operation/High Temperature)	
Method 502.5, Procedure I (Storage/Low Temperature)	
Method 502.5, Procedure II (Operation/Low Temperature)	
Method 503.5, Procedure I (Temperature shock)	
EMC	CE and FCC compliance
Green Product	RoHS, WEEE compliance

SR200

PERFECTRON

Drawing

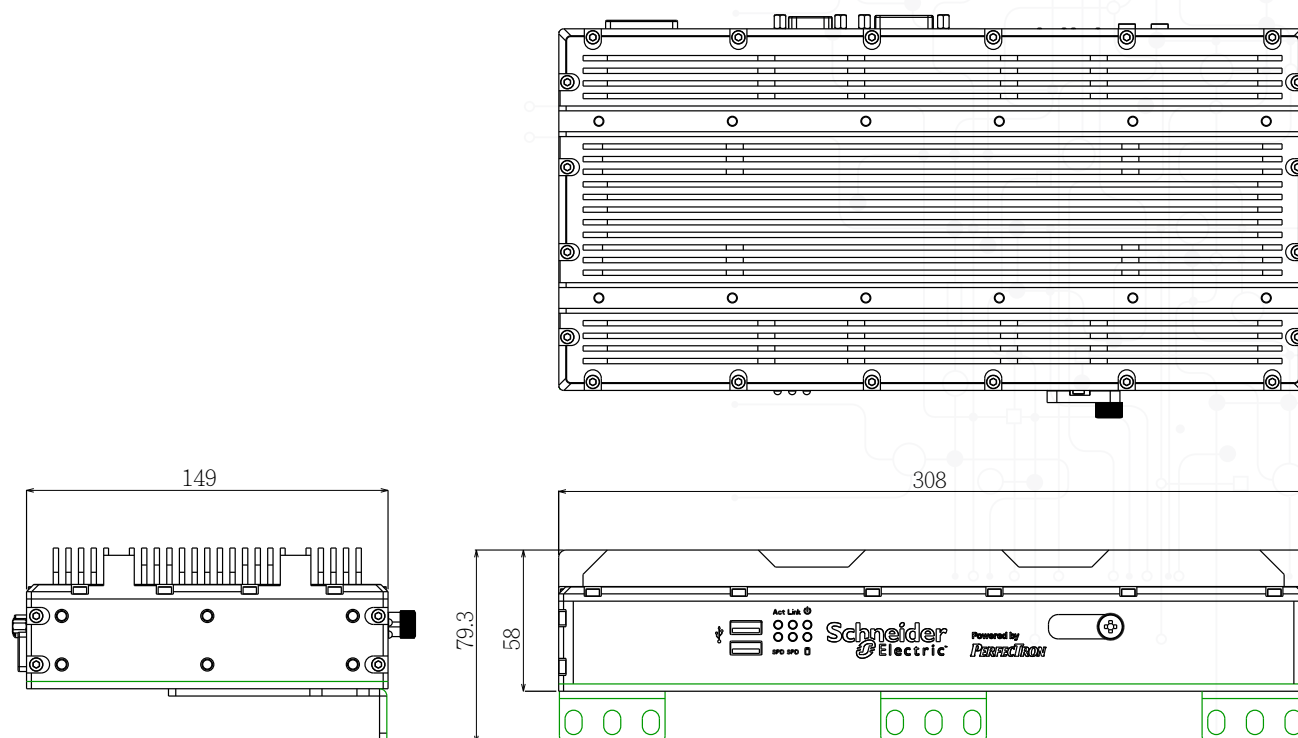

Ordering information



SR10-SCH

- Intel® QM87 MIL-STD Fanless Rugged System with Intel® Core i7-4700EQ Haswell Processor, 9V to 36V DC-in, Wide Temp -40 to 70°C