

IGS-150B



➤ **Industrial 5-port mini type unmanaged Gigabit Ethernet switch with 5x10/100/1000Base-T(X)**

Features

- Support auto-negotiation and auto-MDI/MDI-X
- Supports Jumbo Frame up to 9.6 K Bytes
- Support store and forward transmission
- Support flow control
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




Introduction


IGS-150B is a mini type unmanaged full gigabit Ethernet switch with 5 x 10/100/1000Base-T(X) ports. IGS-150B supports redundant power input and rigid mini size IP-30 housing. In addition, the wide operating temperature range from -40°C to 70°C can satisfy most of operating environment.

Practical Operation

IGS-150B can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.

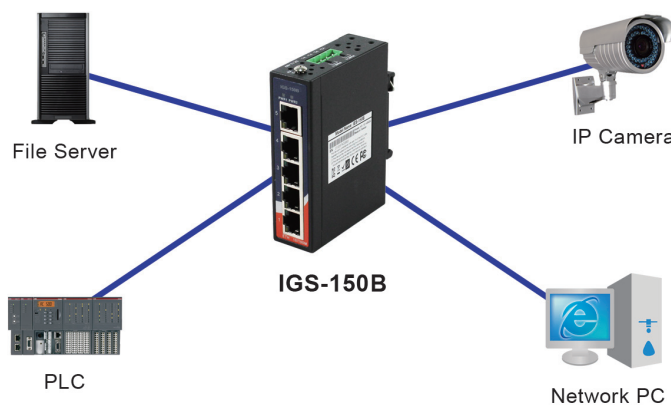

Dimensions

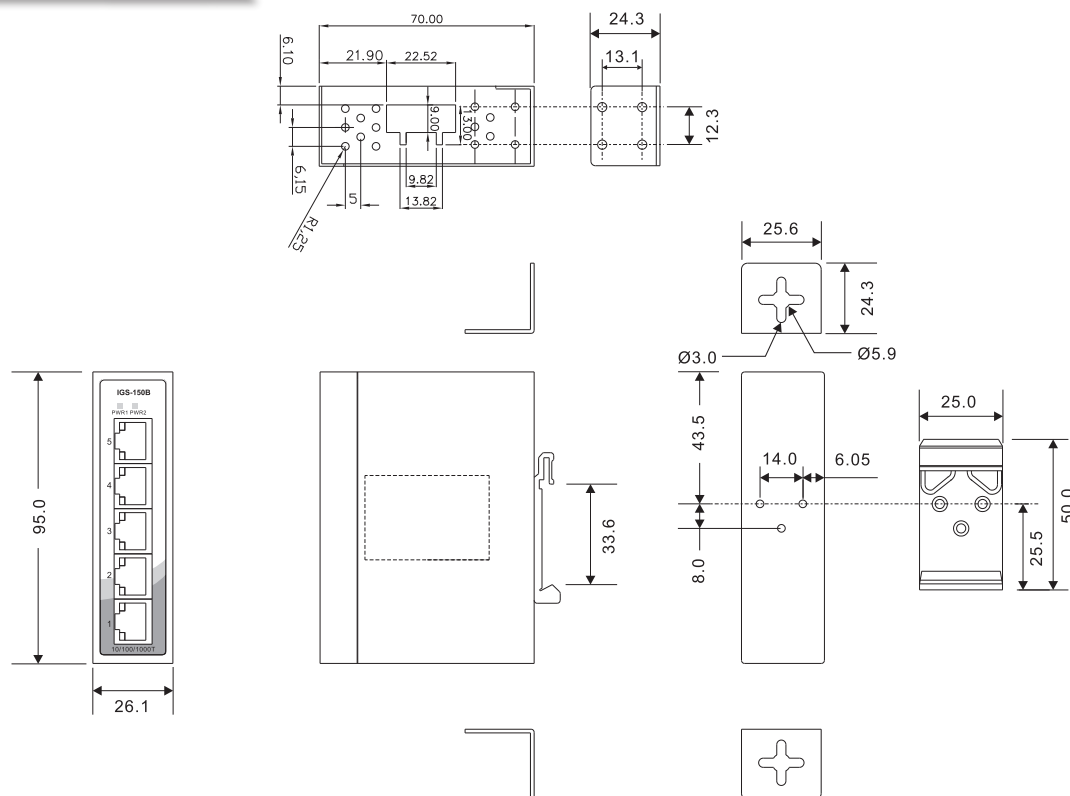

(Unit=mm)

Specifications

ORing Switch Model	IGS-150B
Physical Ports	
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	5
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control
MAC Table	4096 MAC addresses
Processing	Store-and-Forward
LED Indicators	
Power Indicator	Green : Power LED x 2
10/100/1000Base-T(X) RJ45 Port Indicator	Up Green LED for Link/Act indicator Down dual color LED for speed indicator : Green : 1000Mbps Amber : 100Mbps Off : 10Mbps
Power	
Redundant Input Power	Dual DC inputs. 12~48 VDC on 4-pin terminal block.
Power Consumption (Typ.)	3.2 Watts Max.
Overload Current Protection	Present
Reverse Polarity Protection	Present

Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1 (W) x 70 (D) x 95(H) mm (1.03 x 2.76 x 3.74 inch)
Weight (g)	222 g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2(ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4(EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11(DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1
MTBF	2556319 hours
Warranty	5 years

Ordering Information

IGS-1 **A** **B** **B**

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number
Option	- 5: 5 ports	- 0: 0 ports

Available Model	Model Name	Description
	IGS-150B	Industrial 5-port mini type unmanaged Gigabit Ethernet switch with 5x10/100/1000Base-T(X)
Packing List - IGS-150B x 1 - Quick Installation Guide x 1 - Din-Rail Kit x 1 - Wall-Mount Kit x 1		Optional Accessories (Can be purchased separately) DR/SDR/DRP Series DIN-Rail power supply