

FTBx-2250

BROADBAND SOURCE



Compact, rugged and highly reliable—an essential lab testing building block.

KEY FEATURES

SLED CWDM range (1460 to 1625 nm)

Fixed output power

Optimized for power stability

High spectral density

RELATED PRODUCTS



Platform
LTB-8



Power meter
FTBx-1750



Optical switch
FTBx-9150



Variable attenuator
FTBx-3500



BROAD SPECTRAL RANGE, IMPRESSIVE POWER

The high-power, SLED-based FTBx-2250 Broadband Source family covers the bands needed for telecommunications applications. The highly stable FTBx-2250 is ideal for broadband applications, coarse wavelength-division multiplexing (CWDM) network testing, and passive optical networks (PON) component manufacturing and testing, as well as fiber-optic sensing and spectroscopy. FTBx-2250 module must be inserted inside an LTB-8 platform to operate.

Single output source

For CWDM testing, the SCLi option, covering the S, C and L bands, enables accurate characterization of fiber links and their passive components, with a very cost-effective test setup. Presence of an optical isolator makes the output of the SCLi source highly stable.



Designed for component testing

EXFO's FTBx-2250 offers enough power along the spectrum to measure high-level insertion loss. By combining the FTBx-2250 with an optical spectrum analyzer (OSA), you can efficiently qualify your components during development or perform pass/fail testing during production.

High spectral-density stability

High spectral density stability is essential to ensure that the test setup produces accurate measurements, time and again. The more stable the spectrum, the less often a reference trace has to be acquired. This translates into better productivity.

After a reference trace is acquired with the OSA, it can be subtracted to all subsequent traces. With no device under test (DUT) in the system, the resulting traces, centered around the averaged value, present the typical spectral fluctuations of the source.

SPECIFICATIONS ^a

SLED source

Parameter	FTBx-2250-SCLi-1
Mean wavelength (nm)	1550 ± 25
Output power (dBm)	≥ 3
Peak spectral density (dBm/nm) ^b	-23
Minimum spectral density (dBm/nm) ^b	-27
Total power stability (dB) ^c	
15 min	±0.017
8 hours	±0.02
Spectral density stability (dB) ^{c, d}	
15 min	±0.035 (typical)
8 hours	±0.046 (typical)
Ripple (dB) ^d	0.35
Fiber type (μm)	9/125


Notes

- Specifications are valid at 23 °C ± 1 °C, at maximum power after warmup time, with isolator, for return loss of ≥ 30 dB, with power cord plugged in.
- Between 1460 nm and 1625 nm.
- Stability is expressed as ± half the difference between the maximum and minimum values measured in the period.
- Measured in a 0.1 nm resolution bandwidth. Between 1490 nm and 1590 nm.

GENERAL SPECIFICATIONS

Size (H x W x D)	25 mm X 159 mm X 175 mm (1 in X 6 1/4 in X 6 7/8 in)
Weight	0.35 kg (0.77 lb)
Temperature	
operating	0 °C to 40 °C (32 °F to 104 °F)
storage	–40 °C to 70 °C (–40 °F to 158 °F)
Relative humidity	0 % to 80 % non-condensing
LTB-8 operation	Windows 10

LASER SAFETY

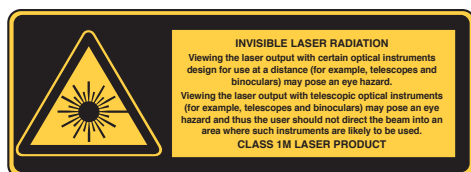

INSTRUMENT DRIVERS

IVI Drivers, LabVIEW™ drivers and SCPI commands

REMOTE CONTROL (AUTOMATION)

With LTB-8: GPIB (IEEE-488.1, IEEE-488.2), Ethernet and RS-232.

STANDARD ACCESSORIES

User guide

ORDERING INFORMATION

FTBx-2250-XX-XX	
Model	Connector
SCLI-1 = Single output SLED, 1460 nm to 1625 nm SLED	EI-EUI-28 = UPC/DIN 47256 EI-EUI-89 = UPC/FC narrow key EI-EUI-90 = UPC/ST (EI only) EI-EUI-91 = UPC/SC EI-EUI-95 = UPC/E-2000 EI-EUI-98 = UPC/LC EA-EUI-28 = APC/DIN 47256 EA-EUI-89 = APC/FC narrow key EA-EUI-91 = APC/SC EA-EUI-95 = APC/E-2000 EA-EUI-98 = APC/LC
Other wavelengths and configurations may be available upon request. Please call factory.	

Example: FTBx-2250-SCLI-1-EA-EUI-89

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.