BROCHURE

IQxel-MW[™] 7G Wi-Fi 6 and Wi-Fi 6E up to 7.3 GHz Measurement Solution



© 2020 LitePoint, A Teradyne Company. All rights reserved.

> (ES) Equipements Scientifiques SA - Département RF & Hyperfréquence - 127 rue de Buzenval BP 26 - 92380 Garches Tél. 01 47 95 99 60 - Fax. 01 47 01 16 22 - e-mail: hyper@es-france.com - Site Web: www.es-france.com

First fully integrated tester for Wi-Fi 6 and Wi-Fi 6E in the 6 GHz band

To address the demand of unlicensed applications in the 6 GHz band, LitePoint's IQxel-MW 7G family of testers was designed to verify the performance of connectivity and cellular technologies up to 7.3 GHz. Working closely with major chipset manufacturers and engaging them from the earliest stages of chipset development, the IQxel-MW 7G is tailored to provide cost-effective, seamless transition from the lab to production.

This fully integrated test solution, supports a continuous frequency range from 400 MHz to 7.3 GHz, thereby ensuring coverage for Wi-Fi testing in the 2.4 and 5 GHz and 6 GHz bands and the most popular wireless connectivity standards (Bluetooth, Bluetooth 5, Bluetooth 5.1, Zigbee, Z-Wave) as well as LPWAN technologies (Sigfox, LoRa).

Additionally, this truly versatile platform includes support for TDD and FDD cellular signals for legacy 2G/3G and mainstream 4G LTE, LAA, and 5G 3GPP NR technologies, securing a future-proof test solution for FR1 testing and an ideal platform for testing Wi-Fi and cellular coexistence.

For R&D characterization or high volume production, the IQxel-MW 7G family is available in three configurations: 2 ports (2 VSA/VSG), 8 ports (2 VSA/VSG), and 16 ports (4 VSA/VSG). These support up to 2x2 and 4x4 true MIMO testing (extensible to 8x8) and high efficiency parallel testing for up to 16 devices.




Qxel-MW

8-port



16-port

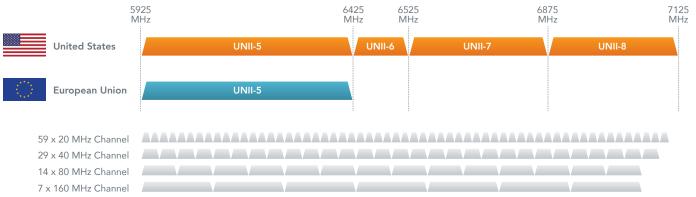

System Capabilities and Features

Wi-Fi channels in the 6 GHz frequency band

Fully integrated tester for Wi-Fi 6 and Wi-Fi 6E testing in the 2.4 GHz, 5 GHz and 6 GHz bands

- Frequency range from 400 MHz to 7300 MHz
- Addresses the requirements of the IEEE 802.11ax (Wi-Fi 6, Wi-Fi 6E) and 802.11ac (Wi-Fi 5) specifications and tests all IEEE 802.11 legacy specifications, including 802.11 a/b/g/n/p/ac/ah/af/j
- Native support for per-port 160 MHz and 80+80 MHz signal combination
- Exceptional residual EVM performance at 1024-QAM
- WiFi 6 testing capabilities: Single-user OFDMA, Trigger based multi-user OFDMA, Uplink and Downlink testing with easy-to-edit RU allocations
- Wi-Fi 6 Carrier Frequency Offset (CFO), power and timing control verification

Scalable MIMO support

- True MIMO testing with 4x4 testing capability and expandable architecture supports up to 8x8 true MIMO
- Supports testing of all key IEEE 802.11ac Wave 2 and 11ax MIMO specification enhancements

Test support for full range of connectivity technologies

- All Bluetooth device standards (1.x, 2.x, 3.0, 4.x, 5 and 5.1)
- Connectivity standards DECT (ETSI EN 300 176-1), 802.15.4-based standards including ZigBee, Z-Wave and WiSUN
- LPWAN technologies LoRa and Sigfox

Supports full range of cellular technologies

- TDD and FDD non-signaling test modes supported
- Legacy 2G/3G and mainstream 4G LTE, LAA, and 5G 3GPP NR technologies

High test throughput for manufacturing

- LitePoint's patented Packet Engine technology provides industry-leading test speed and built-in parallel test capability for high test system efficiency
- Efficient parallel multi-DUT test enhances production capacity

Flexible Programming Interface

- The IQxel-MW 7G is backward compatible with existing LitePoint connectivity test systems, making the transition from older generations seamless
- Supports programming over Ethernet using text-based SCPI programming

Turnkey Test Software Solutions

- LitePoint IQfact+ software provides turnkey solutions for customized testing of leading chipsets, enabling thorough design verification and rapid volume manufacturing with minimal engineering effort
- To facilitate accurate test synchronization, IQfact+ controls both the LitePoint tester and the DUTs. In addition, each IQfact+ is tailored to provide the best test efficiency for a specific chipset and designed specifically for the LitePoint tester architecture, resulting in drastically reduced test time and engineering effort
- IQfact+ encompasses a growing library of over 350 chipsets and supports all key wireless connectivity technologies



Available Technology Licenses

Technology	Support	
IEEE 802.11a/b/g/n/p/j	Standard	
Wi-Fi 5 (IEEE 802.11ac)	Optional	
Wi-Fi 6 (IEEE 802.11ax)	Optional	
IEEE 802.11af	Optional	
IEEE 802.11ah	Optional	
Bluetooth 1.x, 2.x, 3.0, 4.x	Optional	
Bluetooth 5, 5.1	Optional	
DECT	Optional	
Zigbee/ Z-Wave/WiSUN	Optional	IEEE 802.15.4 based standards
SigFox	Optional	
LoRa	Optional	
Navigation	Standard	Carrier to Noise testing for GPS (L1, L2, L5), GLONASS, COMPASS, Galileo
WCDMA/HSPA+	Optional	
GSM/EDGE	Optional	
TD-SCDMA	Optional	
CDMA2000/1xEV-DO	Optional	
LTE	Optional	Includes LTE FDD and LTE TDD
LTE Advanced Pro	Optional	Includes LTE FDD and LTE TDD
3GPP 5G NR	Optional	Includes 5G FDD and 5G TDD
C-V2X	Optional	

LITEPOINT

© 2020 LitePoint, A Teradyne Company. All rights reserved.

TRADEMARKS

LitePoint and the LitePoint logo are registered trademarks of LitePoint Corporation. IQxel-MW 7G is a trademark of LitePoint Corporation. All other trademarks or registered trademarks are owned by their respective owners.

RESTRICTED RIGHTS LEGEND

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written permission of LitePoint Corporation.

DISCLAIMER

LitePoint Corporation makes no representations or warranties with respect to the contents of this manual or of the associated LitePoint Corporation products, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. LitePoint Corporation shall under no circumstances be liable for incidental or consequential damages or related expenses resulting from the use of this product, even if it has been notified of the possibility of such damages.

If you find errors or problems with this documentation, please notify LitePoint Corporation at the address listed below. LitePoint Corporation does not guarantee that this document is errorfree. LitePoint Corporation reserves the right to make changes in specifications and other information contained in this document without prior notice. CONTACT INFORMATION 180 Rose Orchard Way San Jose, CA 95134 United States of America

+1.866.363.1911 +1.408.456.5000

LITEPOINT TECHNICAL SUPPORT www.litepoint.com/support

Doc: 1075-0275-001 January 2020 Rev 2