



**FRESH
LEMONADE**

15% OFF



EVERYDAY
**12:00PM -
16:00PM**

**HOT
GIANT
BURGER**

NEW

freshness of nature,
impact of new taste
hot giant burger



BEVERAGES

COKE	\$3.3	\$4.3	\$4.7
JUICE	\$2.0	\$4.0	\$5.0
MILK SHAKE	\$4.5		
MINERAL WATER	\$2.0		
SPRITE	\$3.5	\$4.5	\$5.5

OUTDOOR SMART SIGNAGE

Ultra High Brightness Outdoor Display
OD SERIES

A successful marketing solution for outdoor business messaging

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com

Slim & Light Design

OD series composed of single display with a light and slim design and it can be easily customized to suit various external environments with no need for separate casing.



Easy integration for partner's customized design

Because the OD Series is significantly thinner and lighter than previous designs, it is mount-ready and can be more easily customized for a variety of applications.



Bright & Brilliant

The OD series possess powerful brightness of **3000 nits**, providing clear and vivid picture quality even under direct sunlight.




Wide Viewing Angle

IPS technology provides better control of the liquid crystals, which in turn allows the screen to be viewed at virtually any angle.



Energy-Efficient Performance

Through advanced thermal control functionality and a filter-free design, the OD Series displays operate at reduced energy consumption. An integrated heat exchanger modifies signage resources depending on the environment, and ultimately cuts costs for operators.

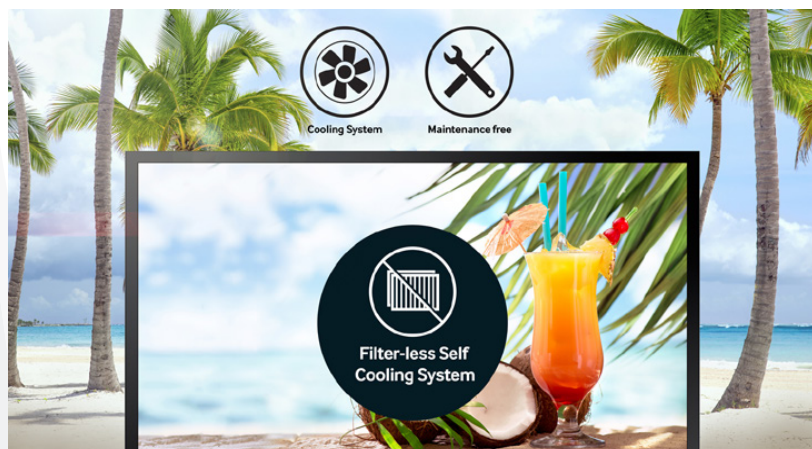

Visible with Polarized Sunglasses

Quarter Wave Plate technology in this display enables clear visibility even when the viewer is wearing polarized sunglasses.




Operate Reliably in Virtally any Environment

Each OD Series display undergoes rigorous IP56 ingress defense testing to ensure resistance to dust, heat, moisture and other environmental variables that can impede operations. This includes an integrated self-cooling system that keeps the OD Series displays running in temperatures ranging from -30oC (-22oF) to 50oC (122oF). In turn, operators can feel confident in the displays' ability to perform 24/7, and without requiring expensive external cooling systems or security measures.



Web Monitoring


The embedded web monitoring allows a variety of parameters to be diagnosed in real time using temperature, pixel, door, ambient light and gyro sensors. It can be easily controlled at all times.

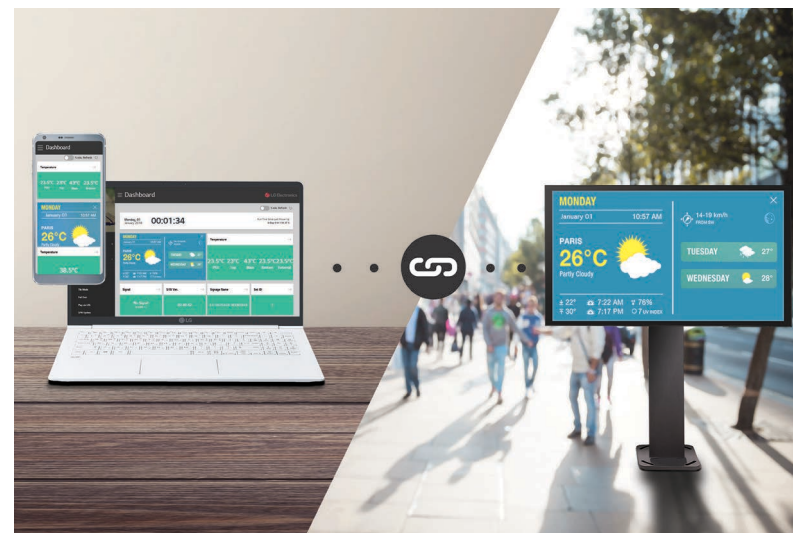




DIMENSIONS

OD550H30 OD490H30

OD550H30

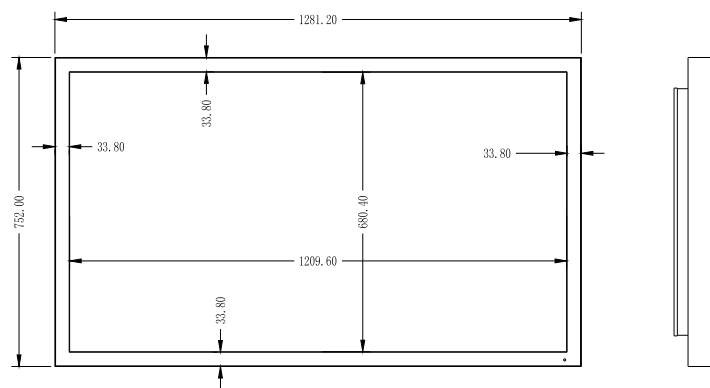

OD490H30

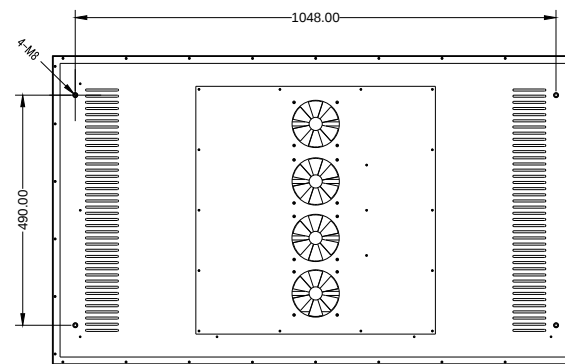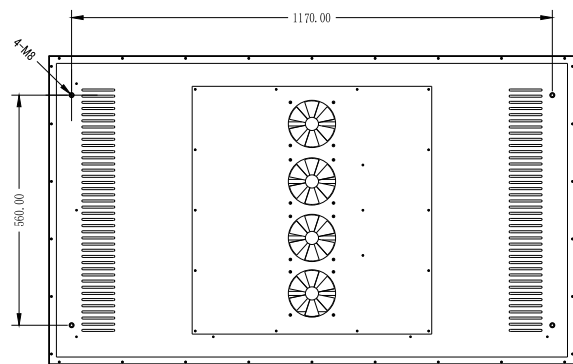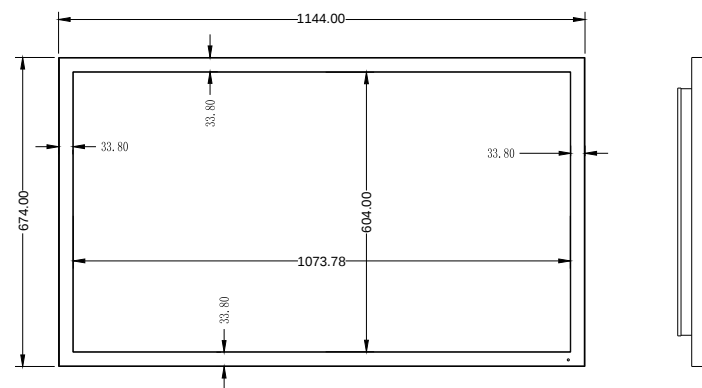

SPECIFICATIONS

OD550H30 OD490H30

MODEL			OD490H30	OD550H30
Panel	Diagonal Size	Class	49	55
		Measured	48.5" / 123.2cm	54.6" / 138.7cm
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)
	Pixel Pitch(mm)		0.559 x 0.559	0.630 x 0.630
	Active Display Area(mm)		1073.78(H) x 604.00(V)	1209.60(H) x 680.40(V)
	Brightness(Typ.)		3,000 cd/m2	3,000 cd/m2
	Contrast Ratio		1,300:1	1,000:1
	Viewing Angle(H/V)		178/178	178/178
	Display Colors		8 bit - 16.7M	8 bit - 16.7M
	Color Gamut		72%	72%
	Operation Hour		7*24	7*24
	Haze		2%	2%
Display	Dynamic C/R		100,000:1	100,000:1
Sound	Speaker Type		N/A	N/A
Power	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Max[W/h]		248	298
Mechanical Spec	Dimension (mm)	Set	1144.0 x 674.0 x 91.5 mm	1281.2 x 752.4 x 91.5 mm
		Package	1245 x 925 x 240 mm	1385 x 1000 x 240 mm
	Weight (kg)	Set	40.5 kg	46.0kg
		Package	70.0 kg	78.0kg
	Mounting Hole		1048 x 490 (Basic) 1000 x 400 (VESA Brack-et Option)	1170 x 560 (Basic) 1200 x 400 (VESA Bracket-et Option)
	Protection Glass		5mm	5mm
	Bezel Width (mm)		33.8 / 33.8 / 33.8 / 33.8 mm	33.8 / 33.8 / 33.8 / 33.8 mm
Operation	Operating Temperature		-30°C~ 50°C	-30°C~ 50°C
	Humidity		10~100% (Non-condensing)	10~100% (Non-condensing)
	IP Certificate		IP56	IP56
Internal Player (Embedded H/W)	Processor Coretex		Rockchip RK3288 Coretex A17 1.8GHz	Rockchip RK3288 Coretex A17 1.8GHz
	Memory Interface		HYNIX DDR3 2GB	HYNIX DDR3 2GB
	Storage		8GB	8GB
	Operating System		Android 5.1	Android 5.1
	Multimedia Video Decoder		MPEG-1/2/4, H.264, WMV,WKV,TS,FLV	MPEG-1/2/4, H.264, WMV,WKV,TS,FLV
			JPEG, PNG, BMP, PNG,GIF	JPEG, PNG, BMP, PNG,GIF
			MP3	MP3