


List of Products

TNH61 Series

□ = Please select “T (taping package)” or “B (bulk package)”.

Part Number	Capacitance	Capacitance Tolerance	Rated Voltage	Rated Current	IR	DC Resistance	Temp. Range
TNH61Y2A330S10A-□M	33pF	+50,-20%	100Vdc	10Adc	10,000MΩmin.	5mΩmax.	-55~+125°C
TNH61Y2A101S10A-□M	100pF	+50,-20%	100Vdc	10Adc	10,000MΩmin.	5mΩmax.	-55~+125°C
TNH61S2A361S10A-□M	360pF	+50,-20%	100Vdc	10Adc	10,000MΩmin.	5mΩmax.	-55~+125°C
TNH61S2A681S10A-□M	680pF	+50,-20%	100Vdc	10Adc	10,000MΩmin.	5mΩmax.	-55~+125°C
TNH61V2A102S10A-□M	1000pF	+50,-20%	100Vdc	10Adc	10,000MΩmin.	5mΩmax.	-55~+125°C

Insertion Loss Characteristics (Reference)

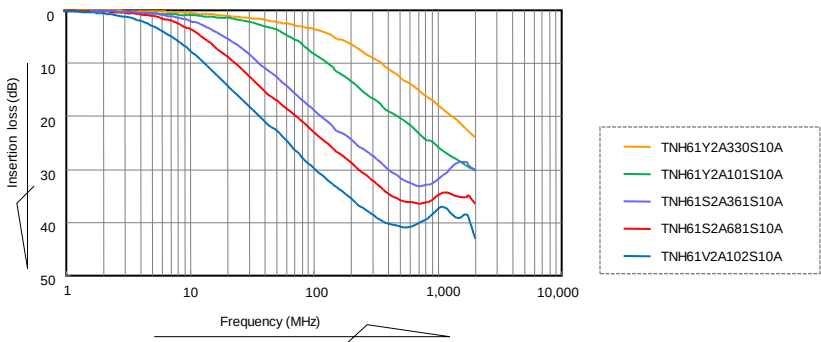

TNH73 Series

□ = Please select “T (taping package)” or “B (bulk package)”.

Part Number	Capacitance	Rated Voltage	Rated Current	DC Resistance	Temp. Range
TNH73R2A473S15A	47,000pF	100Vdc	15Adc	2mΩmax.	X7R
TNH73R2A104S15A	100,000pF	100Vdc	15Adc	2mΩmax.	X7R

Insertion Loss Characteristics (Reference)

