

# LTB-2 rackmount platform

UP TO 4 X 100G IN A 1U SHELF FOR CORD, HERD AND DCI

PART OF THE  
EXFO|FTB ecosystem



EXFO TFv  
Test function virtualization



EXFO Connect  
compatible



The LTB-2 is a powerful, scalable, two-slot modular rackmount platform designed for multiservice testing at central office environments and labs.

## KEY FEATURES AND BENEFITS

**Flexible, scalable and modular:** Compact 1U modular solution with in-rack or tabletop applications. Features datacom and transport protocol testing and simultaneous testing of up to four times 100G

**Hot swappable:** Intelligent module hot-swap capability, enabling a quick transition from platform to platform, or from rackmount platform to portable platform without powering down

**Industrial-grade computer design:** Simple, easy-to-use design powered by a quad-core processor with the Microsoft Windows operating system

**Out-of-band management:** Optimal remote access for maintenance or initial setup using the Intel® Active Management Technology (Intel® AMT)

**Connectivity:** USB 3.0, LAN, Sync and AMT port for maximum connectivity options

**Accessibility:** Remote access capability via VNC or Remote Desktop. Third-party tools can be easily installed offering a versatile range of applications.

## RELATED PRODUCTS AND APPLICATIONS



100G multiservice test module  
FTBx-88260/FTBx-88200NGE



10G multiservice test modules  
FTBx-8870/8880



MEMS optical switch  
FTBx-9160 [1x2, 1x4 configuration]



## EXFO'S LTB-2 PLATFORM

The LTB-2 first-in-class platform is a versatile solution addressing numerous transport and datacom applications. Whether in the central office/exchange, design lab or during the manufacturing process, the LTB-2 provides users with added testing versatility and power for today's complex networks.



## DO MORE!

The Windows 10 operating system allows for a wide choice of third-party applications and supports an extensive range of USB devices.

- › Start faster and multitask
- › Use the Office suite
- › Connect to printers, cameras, keyboards, mice, and more

## Bring your own apps



Share your desktop  
(e.g., using  
TeamViewer)



Antivirus  
software



Communicate  
via email and  
over-the-top  
(OTT) apps



Record and  
automate  
actions



Share files via  
cloud-based  
storage

## TRANSPORT AND DATACOM MULTISERVICE TEST MODULES



### FTBx-88200NGE

- › 40G/100G CFP4 and QSFPx high-speed module
- › Ethernet testing including 10 GigE, RFC 6349 and EXFO's iSAM for 100G testing
- › OTN multistage, multiplexing testing capabilities with ODU0 and ODUflex support; OTN multichannel and mix-mapping testing up to 80 x ODU0 channels
- › Up to FC16X Fibre Channel true wire-speed traffic generation and monitoring
- › 5G support CPRI/eCPRI
- › Fast, intelligent transceiver validation with iOptics



### FTBx-88260

- › 1G/10G/25G/40G/50G/100G dual port capability
- › Supported interfaces: copper SFP/SFP+, SFP, SFP+, SFP28, QSFP+, QSFP28, CFP4 and AOC cables
- › Ethernet testing including RFC 6349 and EXFO's iSAM for 100G testing
- › OTN multistage, multiplexing testing capabilities with ODU0 and ODUflex support
- › Up to FC32X Fibre Channel true wire-speed traffic generation and monitoring
- › 5G support CPRI/eCPRI, including eCPRI 10G and 25G
- › Fast, intelligent transceiver validation with iOptics



### FTBx-8870/8880

- › Ethernet testing including 10 GigE dual port, OTN, RFC 6349 and EXFO's iSAM
- › SONET/SDH, DSx/PDH, ISDN PRI, FTTA, Fibre Channel and packet synchronization
- › 5G support CPRI/eCPRI
- › Fast, intelligent transceiver validation with iOptics

## SOFTWARE TEST TOOLS

These platform-based software testing tools enhance the value of the LTB-2 platform, providing additional monitoring and inspection testing capabilities.

### Wireshark—Third-party test tools

This live-network packet-capture utility makes it possible to look “inside” the packets and obtain data such as transmission time, source, destination, protocol type, etc. Users can then diagnose a problem or root out suspicious behavior.

### Intel® Active Management Technology (Intel® AMT)

Remotely manage the platform (out-of-band management) without being dependent on the operating system or the state of the unit. The AMT Web-based application simplifies the out-of-the-box experience and, as an open-source solution, allows programmable remote troubleshooting recovery with extended capabilities and increased effectiveness.



### EXFO Remote ToolBox

The Remote ToolBox application remotely controls T&D modules installed on the platform using a remote PC and an Ethernet connection.



**EXFO TFv**  
Test function virtualization

#### EXFO TFv

EXFO TFv—Test function virtualization is the industry's first suite of defined offerings that focuses on test function virtualization. EXFO TFv offers all the benefits of virtualization through the seamless enablement of test functions on any EXFO test asset, at any time. This suite is ideal for lab managers who are looking to scale their testing requirements to their specific user needs. Under the EXFO TFv umbrella are FTB Anywhere floating licenses and FTB OnDemand time-based software licenses.

#### Benefits

- › Maximizes ROI on test equipment expenditures
- › Provides financial flexibility with spending options tailored to CAPEX and/or OPEX
- › Optimizes test-asset investments and ensures the timely availability of required test functionality
- › Enables carriers to gradually increase their test capabilities to match the rollout of new service offerings

#### FTB Anywhere: floating test licenses

FTB Anywhere allows EXFO's platform users to share floating test licenses and get the required functionality—anywhere, anytime. In short, the customer owns the software licenses and can share them between EXFO's platforms.

#### FTB OnDemand: time-based software licenses

Part of EXFO TFv, FTB OnDemand allows customers to activate a wide range of test functionalities (e.g., 100G testing) for a specific period of time to match their exact needs. This flexibility is perfect for situations where a test function is only needed for a specific project or for a new service that is still in the early ramp-up stage.

**Automate asset management. Push test data in the cloud. Get connected.**

### EXFO | Connect

EXFO Connect pushes and stores test equipment and test-data content automatically in the cloud, allowing you to streamline test operation from build-out to maintenance.



## FIBER CONNECTOR INSPECTION AND CERTIFICATION—THE ESSENTIAL FIRST STEP



**100%**  
automated<sup>a</sup>

**1-step**  
process<sup>a</sup>

**57%**  
shorter test time<sup>b</sup>

Taking the time to properly inspect a fiber-optic cable can prevent a slew of problems down the line—saving you time, money and headaches.

### FIP-430B | The first fully automated fiber inspection probe for the field

Housing a unique automatic focus adjustment system, the FIP-430B automates each operation in the connector endface inspection sequence, transforming this critical process into one quick and easy step, which can be performed by technicians of all skill levels.

### Three models to fit your budget


FEATURES			
	Basic FIP-410B	Semi-automated FIP-420B	Fully automated FIP-430B
Three magnification levels	✓	✓	✓
Image capture	✓	✓	✓
Five-megapixel CMOS capturing device	✓	✓	✓
Automatic fiber image-centering function	✗	✓	✓
Automatic focus adjustment	✗	✗	✓
Onboard pass/fail analysis	✗	✓	✓
Pass/fail LED indicator	✗	✓	✓

Read the FIP-400B specification sheet or visit [EXFO.com/keepthefocus](http://EXFO.com/keepthefocus) for more information.

## ADAPTED FOR DEDICATED APPLICATIONS. DEDICATED TO HELPING YOU ADAPT.

Thanks to its small format, ultra-powerful processing and highly intuitive interface, this platform is optimized to enable lab users to carry out dedicated Ethernet and OTN test applications simply and efficiently.

- |                              |                                |                          |
|------------------------------|--------------------------------|--------------------------|
| ❶ Power button               | ❷ Module-Slot 1                | ❸ Ground lug             |
| ❹ Power LED                  | ❸ Module-Slot 2                | ❹ Dry contact relays (3) |
| ❺ System information display | ❹ Removable rackmount brackets | ❺ Ethernet ports (2)     |
| ❻ Status LED                 | ❺ -48V input circuit fuses     | ❻ USB 3.0 ports (5)      |
| ❼ Ethernet management port   | ❻ Main power switch            |                          |
| ❽ USB 3.0 port               | ❽ -48V dual feed input         |                          |

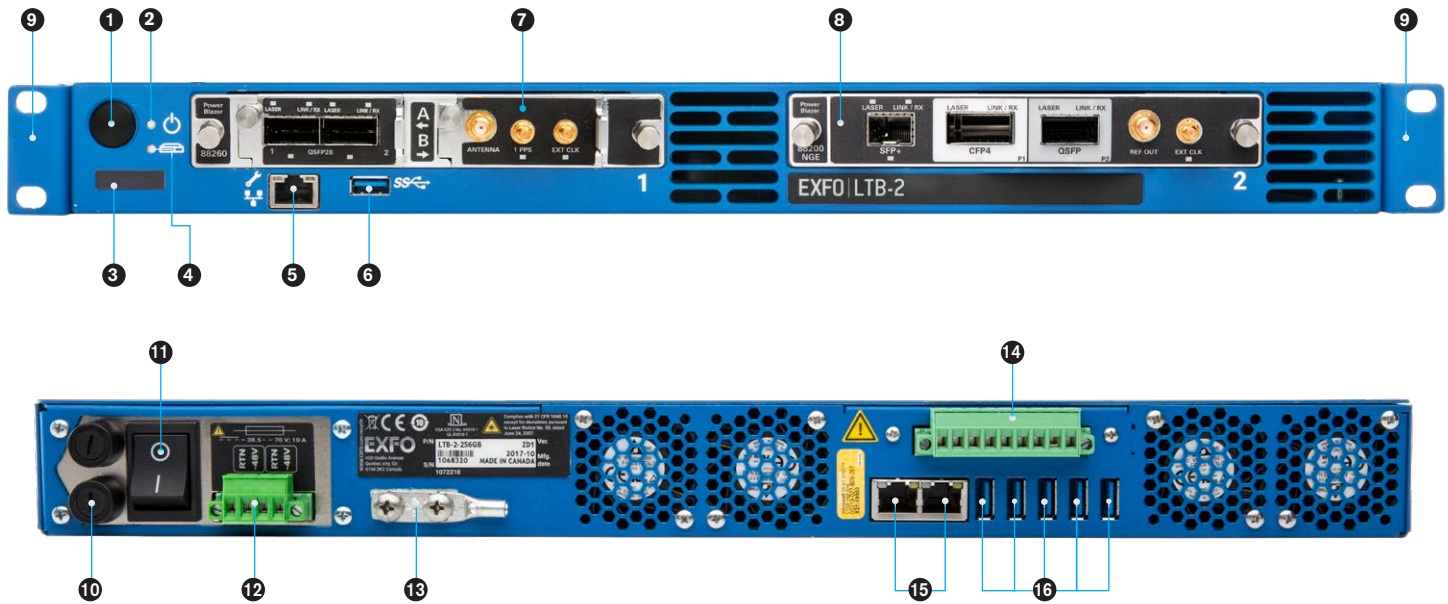

## SPECIFICATIONS

### TECHNICAL SPECIFICATIONS<sup>a</sup>

Mainframe	Quad-core Intel processor/16 GB RAM/Windows 10
Interfaces	3 x RJ45 LAN 10/100/1000 Mbit/s 6 x USB 3.0 port
Storage	256 GB SSD
Power supply	Dual -48 V input, 10 A

### GENERAL SPECIFICATIONS

Size (H x W x D) <sup>b</sup>	44 mm x 482 mm x 264 mm (1 3/4 in x 19 in x 10 3/8 in)
Weight <sup>b</sup>	5.1 kg (11.2 lb)
Temperature	
Operating	-5 °C to 40 °C (23 °F to 104 °F)
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to ≤95 % non-condensing

### ACCESSORIES

GP-130	GPIB cable (6 feet/2 meters)	GP-2258	USB to GPIB adapter
GP-2016	RJ45 LAN cable (10 feet)	GP-3122	External AC/DC 48V power supply with power cord
GP-2256	FTBx module slot blank cover	GP-3123	RTU-2 rackmount brackets (kit of 2)

### LASER SAFETY



- a. All specifications valid at room temperature.  
b. Size and weight inclusive of rackmount brackets.

### ORDERING INFORMATION

**LTB-2-XX**

#### Power supply ■

DC = Internal DC 48V power supply<sup>a</sup>

AC = External DC 48V adaptor with power cord

Example: LTB-2-DC

- a. Default configuration

**EXFO headquarters**    T +1 418 683-0211    Toll-free +1 800 663-3936 (USA and Canada)

For the most recent version of this spec sheet, please go to [www.EXFO.com/specs](http://www.EXFO.com/specs).  
In case of discrepancy, the web version takes precedence over any printed literature.

**EXFO**

(ES) Equipements Scientifiques SA - Département Tests & Mesures - 127 rue de Buzenval BP 26 - 92380 Garches  
Tél. 01 47 95 99 45 - Fax. 01 47 01 16 22 - e-mail: [tem@es-france.com](mailto:tem@es-france.com) - Site Web: [www.es-france.com](http://www.es-france.com)