


RFeyeNode

100-18

Intelligent Wideband Receiver

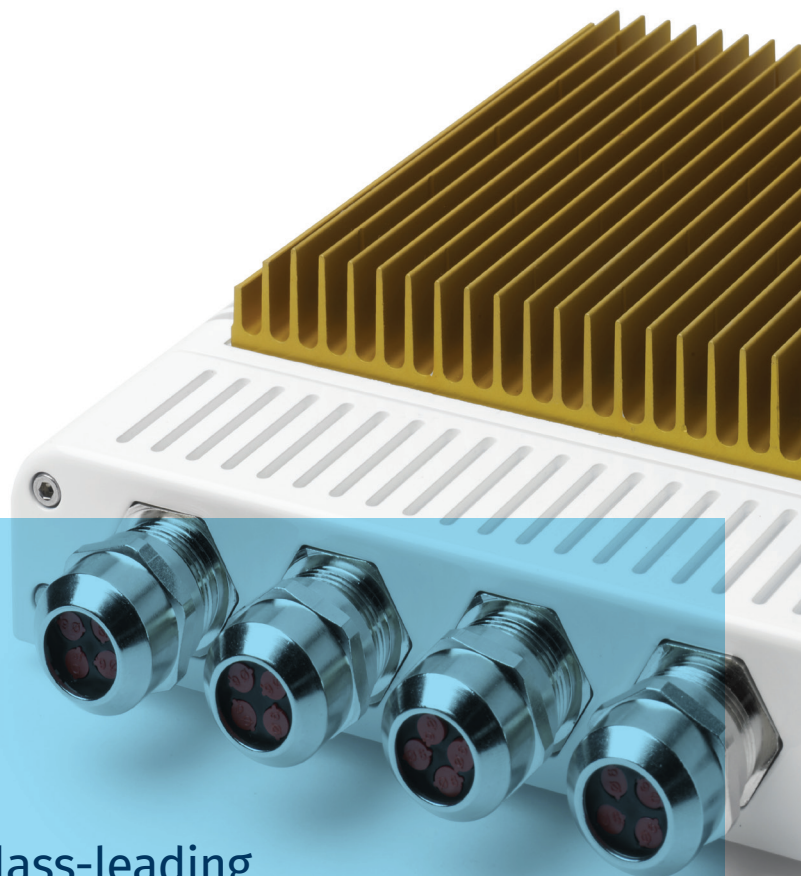

The RFeye Node 100-18 offers class-leading RF performance for advanced capability, real-time spectrum operations or deployment on any spectrum critical site.

The RFeye Node 100-18 offers the capabilities of the Node 50-8 but with extended instantaneous bandwidth of 100 MHz and frequency range up to 18 GHz. Like the other RFeye Nodes in the family, it is a complete spectrum monitoring and geolocation system designed for remote deployment in distributed networks both indoors and outdoors, including in hostile environments. Packaged in a compact, rugged and a weatherproof housing, it has been optimized for size, weight and power (SWaP) and is simple to connect to power and network.

The Node 100-18 is characterized by outstanding phase noise, noise figure, channel retune time and spurious free dynamic range parameters, well above any other product in its class. Its multi-mission capability allows multiple concurrent measurements and geolocations to be performed and multiple users to connect simultaneously from remote locations. The Node 100-18 includes an on-board SSD for logging large data sets.

RFeyeNode

100-18 Specifications

Single channel receiver

Switchable RF inputs 3 x SMA connectors

Frequency

Range 9 kHz to 18 GHz

Noise figures at maximum sensitivity

9 kHz to 0.12 GHz	12 dB typical
0.12 GHz to 6 GHz	8.5 dB typical
6 GHz to 10 GHz	10.5 dB typical
10 GHz to 18 GHz	13 dB typical

Phase noise

Receiver input at 1 GHz	-126 dBc/Hz at 20 kHz offset, typ.
Receiver input at 5 GHz	-121 dBc/Hz at 20 kHz offset, typ.
Receiver input at 18 GHz	-110 dBc/Hz at 20 kHz offset, typ.

Signal analysis

Instantaneous bandwidth	100 MHz
Tuning resolution	1 Hz

Internal frequency reference (pre-calibration)

Initial accuracy	±1.0 ppm typ.
Stability	±1.5 ppm typ.
Ageing	±0.5 ppm per year

Programmable sweep modes

Sweep speed at 2 MHz RBW	390 GHz/s typ.
Sweep speed at 61 kHz RBW	320 GHz/s typ.
User programmable modes	free run continuous, single timed, user trigger and adaptive
Trigger-on-event modes	user defined masks, actions and alarms

Sampling

Resolution	16 bits per channel (I&Q)
Rate	125 MS/s I&Q

Third order intercept points with AGC

≤ 1 GHz	+20 dBm typical
> 1 GHz to ≤ 6 GHz	+15 dBm typical
> 6 GHz to ≤ 18 GHz	+20 dBm typical

Local oscillator

Re-radiation ≤ -90 dBm typical

Frequency references

Selectable	Internal, GPS or external
External input	10 MHz or 100 MHz ±1 kHz
GPS holdover (option)	Synchronisation Backup Module (SYN-SBM0002), ±1.5 µs / 8 hrs

Processor sub-system

CPU	Intel E3845 quad core
Level 2 cache	2 MB
Main memory	8 GB ECC DDR3
System disk	32 GB

I/O

Network	1 x 1 GigE, with PoE
Universal Serial Bus	1 x USB3.0, 1 x USB2.0
2 x IEEE1394 expansion ports configurable as:	2 x SyncLinc, trigger input, external peripheral control
GPS antenna input	1 x SMA passive or active (3.3 VDC)

Data storage

External flash disk	via USB interfaces
Internal storage	256 GB SSD

System software

Boot firmware	BIOS
Operating system	Linux, kernel v 2.6
RFeye Node Control Protocol	NCP Server (NCPd)
Node Apps (optional)	Logger, Recorder, Threshold, Stations, Survey

Size, weight and power

Dimensions (w, h, d) without end plate or heat sink	200 x 75 x 192 mm (7.9 x 2.0 x 7.6 inches)
Weight without end plate or heat sink	2.4 kg (5.3 lbs)
DC power or PoE	10 to 48 VDC

Power consumption

Typical	40 W
Maximum	55 W

Environmental

Operating temperature	-30 to +50 °C (-22 to 122 °F)
Storage temperature	-40 to +70 °C (-40 to 158 °F)
Ingress protection	IP67 (with optional end plate)



CRFS and RFeye are trademarks or registered trademarks of CRFS Limited. Copyright © 2017 CRFS Limited. All rights reserved. No part of this document may be reproduced or distributed in any manner without the prior written consent of CRFS. The information and statements provided in this document are for informational purposes only and are subject to change without notice. Document Number CR-000127-DS-17, Julv 2018.



FS 576625