


PICO-BT01

Pico-ITX Board with Intel® Atom™/ Celeron® Processor SoC

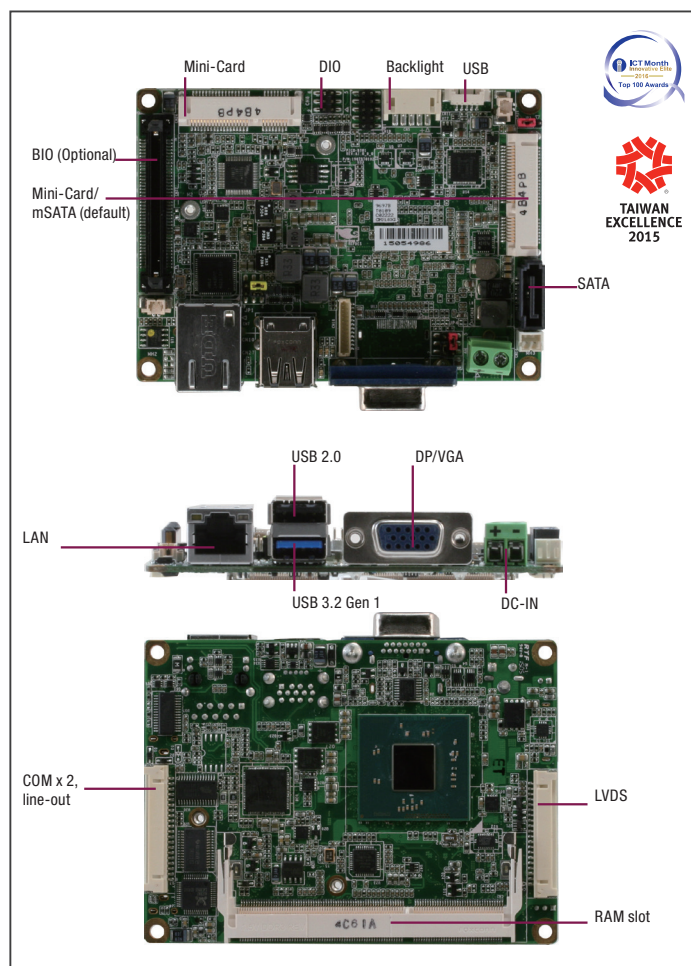

Specifications

System	
Form Factor	Pico-ITX
CPU	Onboard Intel® Atom™ E3845/ Celeron® J1900/N2807 Processor SoC
CPU Frequency	Up to 2.0 GHz
Chipset	Intel® E3845/J1900/N2807
Memory Type	204-pin DDR3L SODIMM x 1, DDR3L 1066/1333, Max. 8GB
Max. Memory Capacity	Up to 8GB
BIOS	AMI/SPI
Wake On LAN	Yes
Watchdog Timer	255 levels
Power Requirement	+12VDC
Power Supply Type	AT/ATX (default) optional lockable connector
Power Consumption (Typical)	Intel® Celeron® J1900 2.0GHz, DDR3L 1333 MHz 8 GB 1.14A@+12V
System Cooling	Heat-spreader, heatsink or cooler optional
Dimension	3.94" x 2.84" (100 mm x 72 mm)
Gross Weight	0.88lb (0.4 kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) or WiTAS 2 (-40°C ~ 85°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	80,000
Certification	CE,FCC
Display	
Chipset	Intel® E3845/J1900/N2807
Resolution	VGA up to 2048 x 1152 @60Hz or DP up to 2560 x 1400 @60Hz LVDS (18/24-bit) up to 1400 x 900 @60Hz
LCD Interface	18/24-bit Single LVDS

Features

- Onboard Intel® Atom™ E3800/ Celeron® J1900/N2807 Processor SoC
- DDR3L 1066/1333 MHz SODIMM x 1, Up to 8 GB
- 18/24-bit LVDS LCD, CRT Co-lay Display Port
- SATA 3.0Gb/s x 1, Mini-Card(Full size)/mSATA(default) x 1
- USB 3.2 Gen 1 x 1, USB 2.0 x 2
- Gigabit Ethernet x 1, RJ-45 x 1
- RS-232 x 1, RS-232/422/485 x 1
- Mini-card x 1 (Half size)
- 4-Bit Digital I/O
- BIO Connector for Daughter Board Optional



I/O	
Storage/SSD	SATA 3.0Gb/s x 1, Mini-Card(Full size)/mSATA(default) x 1
Ethernet	Intel Gigabit Ethernet, 10/100/1000Base-TX x 1 (Atom E series with I210IT, Celeron J/N series with I211AT)
USB Port	USB 3.2 Gen 1 x 1 Rear IO, USB 2.0 x 1 Rear IO and x 1 Pin header
Serial Port	RS-232 x 1, RS-232/422/485 x 1 (Ring /+5V/+12V)
Audio	Line-out x 1
DIO	4-bit (2-in, 2-out)
Expansion Slot	Mini-Card (Half-size) x 1, BIO x 1
SIM	Option by BIO Board
TPM	—
Touch	—


Packing List

- PICO-BT01-HSP01
Heat Spreader
- 1703200153
COM x 2, Line-out Cable
- PICO-BT01

Optional Accessories

Part Number	Description	Qty.
1709070500	SATA Cable	1
1702150155	SATA Power Cable	1
1702040167	Power/FAN Cable 16cm	1
PICO-BT01-FAN01	CPU Cooler.84*53*22.2mm.Silver.used with HSP	1
PICO-BT01W1-HSK01	Heatsink for E3845 WiTAS1. To be used with heat Spreader.	1
PICO-BT01-HSK01	Heatsink for standard product.To be used with heat Spreader.	1
1700050207	USB Cable 20cm	—



Block Diagram

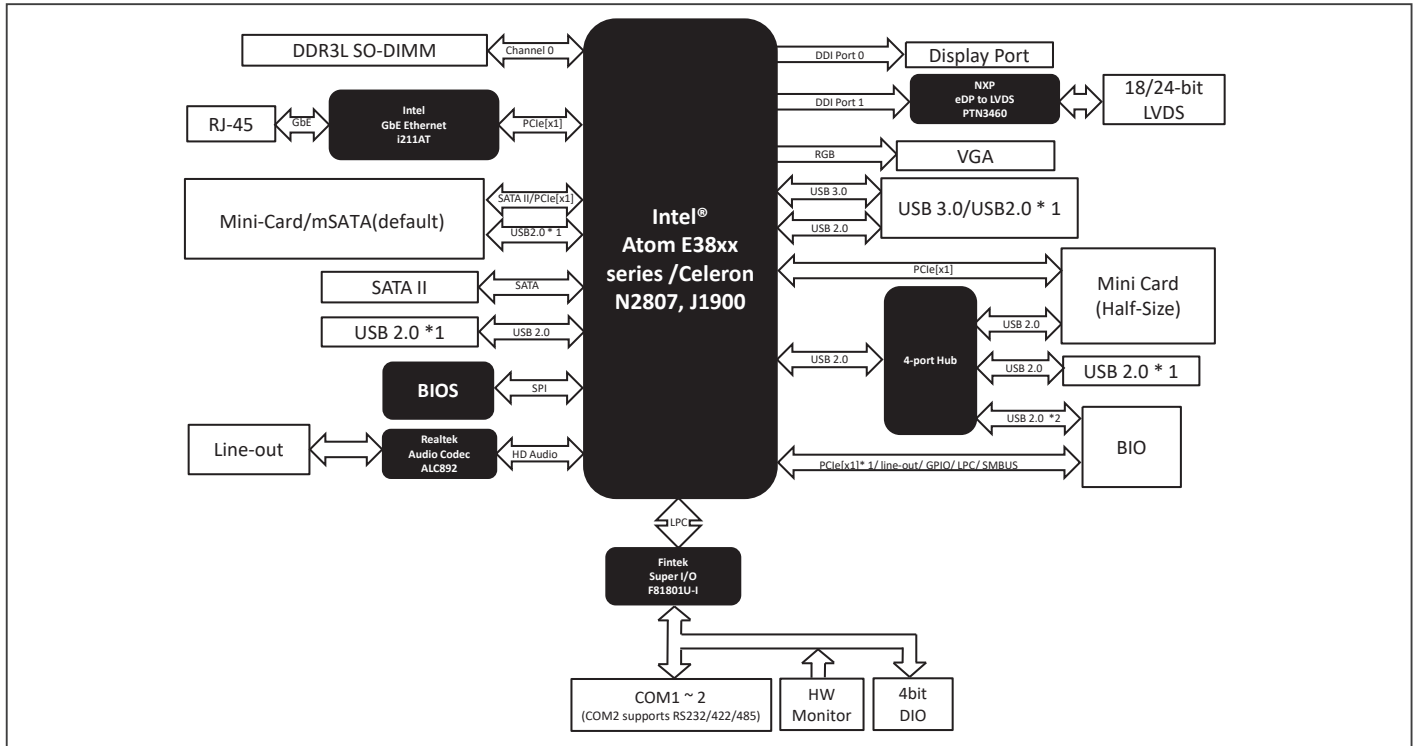

Dimension

Unit: mm

Standard model with Heat-Spreader

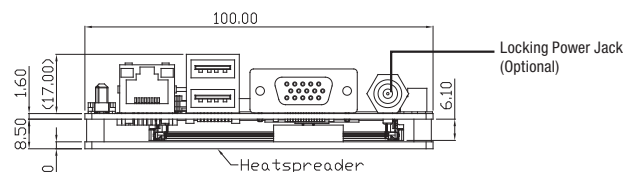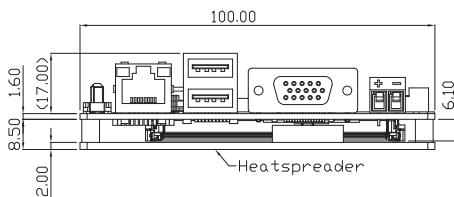

Ordering Information

Part Number	CPU	RAM	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Temp.	Others
PICO-BT01-A11-0002	Celeron® N2807 (Dual Core)	DDR3L, Max. 4GB	Heat-spreader	DP+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	32°F ~ 131°F (0°C ~ 60°C)	Line-out
PICO-BT01-A11-0003	Atom™ E3845 (Quad Core)	DDR3L, Max. 8 GB	Heat-spreader	CRT+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	32°F ~ 131°F (0°C ~ 60°C)	Line-out, BIO x 1
PICO-BT01-A11-0004	Atom™ E3825 (Dual Core)	DDR3L, Max. 8 GB	Heat-spreader	DP+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	32°F ~ 131°F (0°C ~ 60°C)	Line-out
PICO-BT01-A11-0005	Celeron® J1900 (Quad Core)	DDR3L, Max. 8 GB	Heat-spreader	CRT+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	32°F ~ 131°F (0°C ~ 60°C)	Line-out
PICO-BT01W2-A11-0003	Atom™ E3845 (Quad Core)	DDR3L, Max. 8 GB	Heat-spreader	CRT+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	WiTAS 2 (-40°C ~ 85°C)	Line-out, BIO x 1
PICO-BT01W2-A11-0004	Atom™ E3825 (Quad Core)	DDR3L, Max. 8 GB	Heat-spreader	DP+LVDS	24bit 1CH	SATAII x 1, Mini-Card (Full size)/mSATA (default) x 1	GbE x 1	USB 3.2 Gen 1 x 1, USB2.0 x 2	1	1	Mini-card x 1 (Half size), DIO 4-bit	+12V (Terminal block)	WiTAS 2 (-40°C ~ 85°C)	Line-out