


Get started with your SmartRock™ or SmartRock™ Plus sensors in these easy steps




1 Remove the temperature probe from the sensor to activate




2 Add the sensor to your project by scanning the QR Code

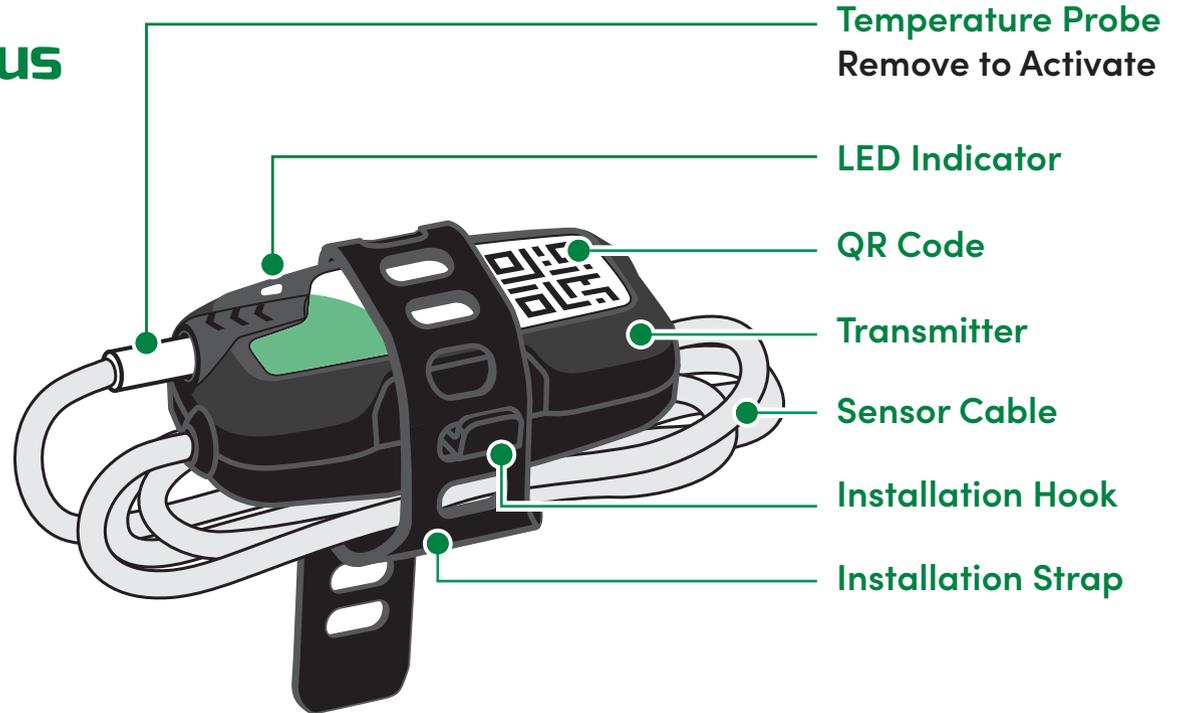


3 Assign the sensor a name in the mobile app and on it's label

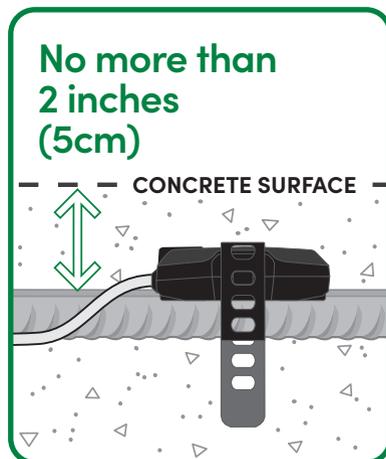

4 Install the transmitter on rebar no more than 2 inches (5cm) from concrete surface

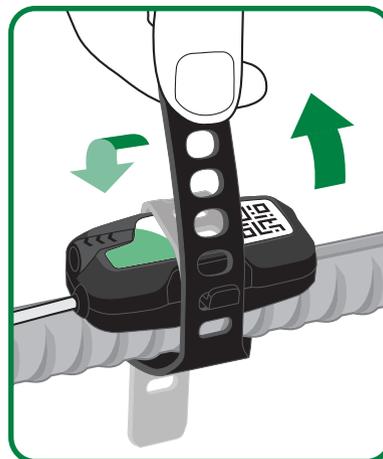

5 Pull strap tight over the installation hook and fold remaining strap over

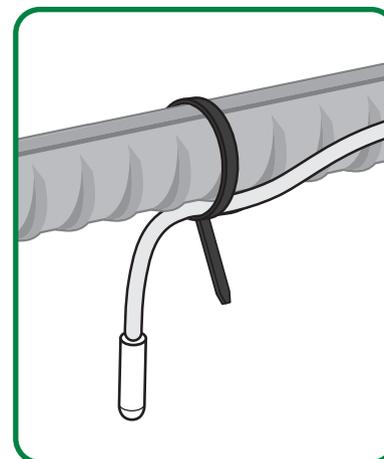

6 Secure the cable and temperature probe below the rebar




7 Pour concrete and monitor results in the mobile app or remotely with SmartHub™

GIATEC SmartRock™

The World's #1 Wireless Concrete Sensor

Need more sensors? Please contact us at:
sales@giatec.ca or +1 877-497-6278

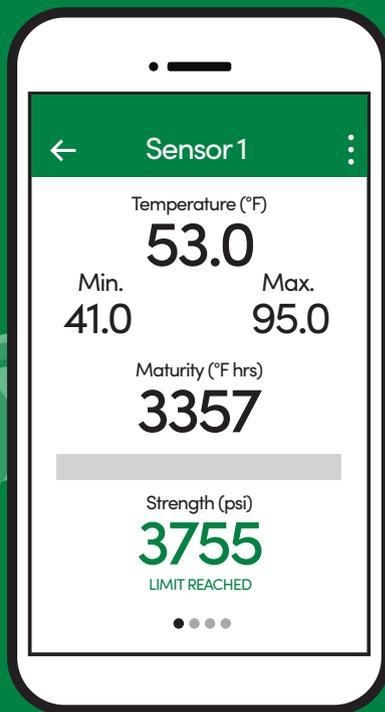

! Have you updated your app?

Download the
SmartRock™ or **SmartRock™ Plus**
mobile app for iOS or Android

Have
questions?

Contact us at
support@giatec.ca
+1 877-497-6278