

2231A-30-3


195W Triple Channel DC Power Supply

3-Year
Warranty

- Get three isolated, independent, and adjustable outputs in one instrument
- Output a total of 195W of power with two 30V@3A outputs and one 5V@3A output
- Set voltage outputs with 0.06% basic accuracy and current outputs with 0.2% basic accuracy
- Output DC power with less than 5mVp-p noise
- Display voltage and current measurements continuously from all three outputs
- Double output levels by connecting the two 30V channels in series or parallel
- Store frequently used configurations in any of 30 setup memory locations
- Turn off any output after a predetermined test time with each channel's output timer
- Control the supply from a PC with an optional USB adapter

APPLICATIONS

- Engineering and science student labs
- Service work
- Electronic design

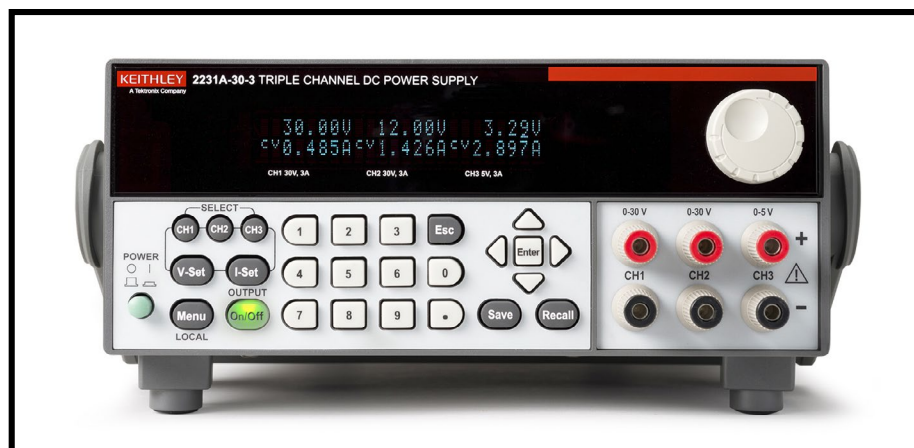

The Model 2231A-30-3 Triple Channel DC Power Supply can output a total of 195W of power, providing the power levels needed to energize a wide range of circuits and devices for benchtop work. Two channels can supply up to 30V at 3A each; the third channel can provide up to 5V at 3A. The Model 2231A-30-1 does not compromise on performance or convenience features, offering the versatility and ease of use you need, so it can be the only DC power supply on your bench.

Quality DC Power

The Model 2231A-30-3 is a linear-based design with less than 5mVp-p noise per output. Voltage and current settings have basic accuracies of 0.06% and 0.2% respectively. The load voltage and load current readback results provide the same levels of accuracy, so you can be confident you are sourcing accurate, low noise voltages and currents to your device-under-test (DUT).

Three Fully Independent Outputs


Each output of the Model 2231A-30-3 is fully programmable and can be turned on and off independently from the other channels; it essentially provides three power supplies in one instrument. You can power up both the analog circuitry and the digital circuitry of a printed circuit board or a complete device, all with the same instrument.

All Outputs Are Isolated from Each Other and from Ground

Each output can power a circuit on a different ground reference. The low connection on each output is not connected to any of the other outputs. That means one supply can test three separate circuits on three different ground references or can power circuits that are transformer or optically isolated from each other. Furthermore, all outputs are not referenced to ground, so the Model 2231A-30-3 can power both floating circuits and grounded circuits.

Power Bipolar Circuits

Because the Model 2231A-30-3's outputs are isolated, one output can be turned effectively into a negative source by connecting its high terminal to the common reference point of a bipolar circuit. A second output can connect its low terminal to the same common reference point. The result is a positive output and a negative output. If the two 30V channels are used in this configuration, both outputs can be changed at the same time by using the Model 2231A-30-3's tracking function. That allows varying both channels at the same time while keeping their outputs at identical magnitudes.

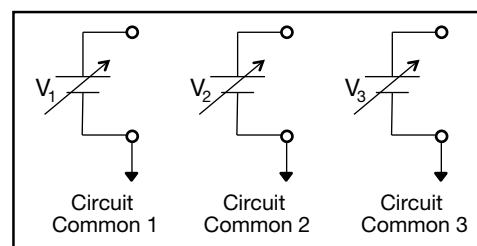

The Model 2231A-30-3 has three fully independent, programmable outputs that are electrically isolated from each other. This allows them to power circuits that are on different grounds, such as optically isolated circuits.

195W Triple Channel DC Power Supply

DC POWER SUPPLIES

KEITHLEY

2231A-30-3

Ordering Information

2231A-30-3
Triple Channel DC
Power Supply

Accessories Supplied

Documentation CD with User Manual
Certificate of Calibration
Power Cord

ACCESSORIES AVAILABLE

2231A-001 USB Adapter with USB Cable

SERVICES AVAILABLE

2231A-30-3-EW	1 Year KeithleyCare® Gold Plan
2231A-30-3-5Y-EW	5 Year KeithleyCare Gold Plan
C/2231A-30-3-3Y-STD	KeithleyCare 3 Yr Std Calibration Plan
C/2231A-30-3-5Y-STD	KeithleyCare 5 Yr Std Calibration Plan

195W Triple Channel DC Power Supply

Supply 60V or 6A


When the application requires outputting more than 30V or 3A, the two 30V channels can be combined to double the output level. Wire the two outputs in series to deliver up to 60V or wire them in parallel to deliver up to 6A. For your convenience, the Model 2231A-30-3 display will read the total output, either voltage or current, to eliminate confusion. Also, the supply controls both outputs to deliver the required voltage or current. There's no need to set up each channel individually; the supply manages the channels for you, so combining channels is uncomplicated.



Wire the two 30V channels in series or parallel to double the output voltage to 60V or the supplied current to 6A. The Model 2231A-30-3 has series and parallel modes that manage the channels and display the total output. This display shows the supply's parallel mode, including the output voltage and the total current from the channels wired in parallel.

Easily Test, Monitor, and Protect Your Circuits

- Adjust the outputs with the rotary knob or enter the output values precisely using the keypad with setting resolution of 10mV or 1mA.
- See the voltage and current readings on all channels at all times; the Model 2231A-30-3's display shows the readings from all three outputs simultaneously.
- Protect your DUT with an overvoltage protection setting for each output.
- Set timers to turn off an output after a programmed time to prevent excess stress on a circuit under development.
- Store and recall instrument setups for frequently used tests to begin testing quickly. You can store up to 30 unique test setups.

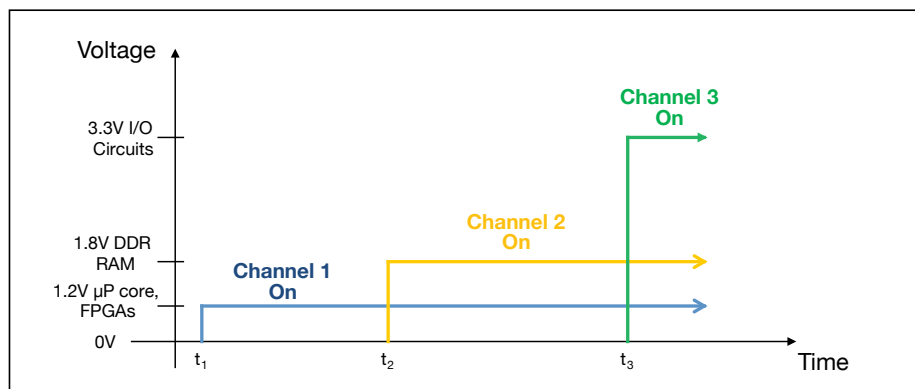

Safely power circuits up and down in the proper sequence using the three independently programmable output channels.

Control the Supply and Upload Data to a PC

Use the optional Model 2231A-001 USB Adapter to control the Model 2231A-30-1 via a PC's USB interface, then transfer readings from the outputs to combine with other test data for a more thorough analysis of DUT performance. The 2231A-001 USB Adapter provides the flexibility to use the supply under either manual or automated control.

KEITHLEY

2231A-30-3

195W Triple Channel DC Power Supply

Specifications

DC OUTPUT RATING

	Channel 1	Channel 2	Channel 3
Voltage	0–30 V	0–30 V	0–5 V
Current	0–3 A	0–3 A	0–3 A

MAXIMUM POWER: 195W

LOAD REGULATION:

Voltage: ≤0.02% + 4mV
Current: ≤0.2% + 3mA

LINE REGULATION:

Voltage: ≤0.02% + 4mV
Current: ≤0.2% + 3mA

RIPPLE AND NOISE (20Hz–20MHz):

Voltage: ≤1mVrms/≤5mVp-p
Current: ≤6mA_{rms}

SETTING RESOLUTION:

Voltage: 10mV
Current: 1mA

SETTING ACCURACY:

Voltage: ≤0.06% + 20mV
Current: ≤0.2% + 10mA

REDABACK RESOLUTION:

Voltage: 10mV
Current: 1mA

REDABACK ACCURACY:

Voltage: ≤0.06% + 20mV
Current: ≤0.2% + 10mA

ISOLATION VOLTAGE, OUTPUT TO CHASSIS: Any output can be isolated up to 240V (DC + peak AC with AC limited to a maximum of 3Vpk-pk and a maximum of 60Hz) relative to the earth ground terminal.


ISOLATION VOLTAGE, OUTPUT TO OUTPUT: Any output can be isolated up to 240V (DC + peak AC with AC limited to a maximum of 3Vpk-pk and a maximum of 60Hz) relative to any other output terminal.

TRACKING AND COMBINATION MODES:

Tracking Mode: Maintains the ratio on the two 30V output channels that is present when the control is activated.

Combination $V_1 + V_2$ Series Mode: Deliver up to 60V when CH1 and CH2 are wired in series. Meter reads back combined voltage.

Combination $I_1 + I_2$ Parallel Mode: Deliver up to 6A when CH1 and CH2 are wired in parallel. Meter reads back combined current.

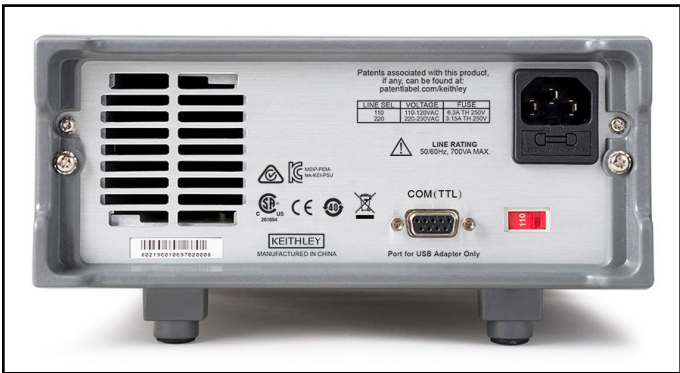

Model 2231A-30-3 rear panel showing the communication port, line power setting switch, and the power input connector with fuse holder.

GENERAL

MEMORY: 30 setup memory locations.

OUTPUT TIMER RANGE: 0.1s to 99999.9s.

DISPLAY: Vacuum fluorescent display.

CONNECTIONS:

Front: Power output jacks: 3 sets, safety-shrouded banana jacks.

Rear: DB9 connector for remote control.

OVERTEMPERATURE PROTECTION: If the internal temperature of the supply exceeds 85°C, the supply will automatically turn off.

EMC COMPLIANCE: Conforms to European Union EMC Directive.

SAFETY COMPLIANCE: Conforms to European Union Low Voltage Directive.

POWER LINE RATINGS: 110VAC/230VAC ±10%.

POWER LINE FREQUENCY: 47Hz–63Hz.

MAXIMUM POWER CONSUMPTION: 750VA.

OPERATING ENVIRONMENT: 0° to 40°C, 5% to 80% relative humidity at up to 40°C.

STORAGE ENVIRONMENT: –20° to 70°C, 5% to 80% relative humidity up to 40°C, and 5% to 60% relative humidity from 40° to 70°C.

PHYSICAL CHARACTERISTICS

Height: 88.2 mm (3.5 in)

Width: 214.5 mm (8.5 in)

Depth: 354.6 mm (14 in)

Net Weight: 7.10kg (15.7 lbs.).

Shipping Weight: 9.40kg (20.7 lbs.).

WARRANTY: 3 years.

Contact Information:

Australia* 1 800 709 465
Austria 00800 2255 4835
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium* 00800 2255 4835
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe / Baltics +41 52 675 3777
Central Europe / Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France* 00800 2255 4835
Germany* 00800 2255 4835
Hong Kong 400 820 5835
India 000 800 650 1835
Indonesia 007 803 601 5249
Italy 00800 2255 4835
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Malaysia 1 800 22 55835
Mexico, Central/South America and Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands* 00800 2255 4835
New Zealand 0800 800 238
Norway 800 16098
People's Republic of China 400 820 5835
Philippines 1 800 1601 0077
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea +82 2 6917 5000
Russia / CIS +7 (495) 6647564
Singapore 800 6011 473
South Africa +41 52 675 3777
Spain* 00800 2255 4835
Sweden* 00800 2255 4835
Switzerland* 00800 2255 4835
Taiwan 886 (2) 2656 6688
Thailand 1 800 011 931
United Kingdom / Ireland* 00800 2255 4835
USA 1 800 833 9200
Vietnam 12060128

* European toll-free number. If not accessible, call: +41 52 675 3777



Find more valuable resources at **TEK.COM**

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.
022217.SBG 1KW-61078-0



ES France - Département Puissance Energie - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 45 - Fax. 01 47 01 16 22 - e-mail: tem@es-france.com - Site Web: www.es-france.com