
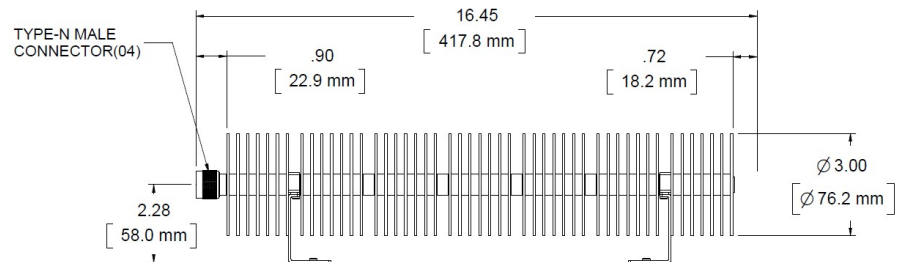


DC – 18.0 GHz

250 WATTS

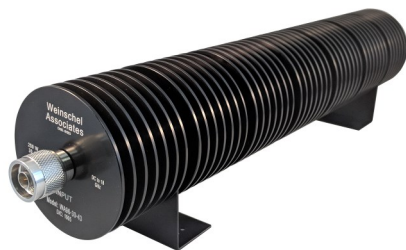

Features

Type N or TNC M/F connectors per MIL-STD-348A, interface dimensions mate non-destructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position with included mounting stands.

Maximum VSWR:

Frequency (GHz)	VSWR
	WA1496
DC - 18.0	1.6

Dimensions:

Height:	96.1 (3.78)
Diameter:	76.2 (3.0)
Length:	417.8 (16.45)
Weight:	1.59 (56)

Note: Dimensions are given in mm (in), or kg (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 18.0 GHz.

Power Rating: 250 W maximum average rated power to 25°C ambient temperature, de-rated linearly to 20 W at 125°C. 1 kW peak power (5 µsec pulse width, 12.5% duty cycle).

Temperature Range: -55°C to +125°C.

Construction: Black aluminum alloy body with passivated stainless steel connectors. Gold plated beryllium copper contacts. RoHS Compliant

Calibration: VSWR performed across frequency range. Calibration test data available at additional cost.

WEINSCHEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

144

Rev -

Specification

