





Capacitive touch solutions for wide range of industrial & commercial applications









1920×1080 resolution



The monitor comes with a 10-point touch screen and 1000nits high brightness screen panel. The interfaces support a wide range of customisation options in addition to the existing types such as HDMI, VGA, AV, etc. Its IP65 front panel design is a great convenience for installation methods and applications.

www.lilliput.com

T(2150)







ES France - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com



Rich Interfaces

In addition to the interfaces shown, the engineers have creatively reserved a number of expansion ports on the mainboard that can be uniquely customized for different requests The readily replaceable sheet metal also provides a great deal of ease in modifying the interfaces.

Nawyelta (Bite)		
Miranda		Ċ
Places	0	Interview new
	Welcome Miranda!	consultant Fourth Coffee 2:00 PM
		2:00 PM Monday 16 Mail
		Minter
		Photos
		21
		<u> </u>
	Entertainment	
Calculator		
Recently added	And	Music Video
Frozen Free Fall		MMMmmMMMm
All apps ↓		
Ask me anything	Q 🗖	🥭 🔚 🔍
States of the second	and the second se	State of the owner owner of the owner
A REAL PROPERTY AND A REAL		
and the second s	and the second s	Service of the servic
	Places Places Places File Explorer Documents Documents Settings Most used Vord V	Viranda Places Place Places Places Places Places Pouments Pouments Pouments Pouments Pouments Nord Nord Nail Nail Pople News PonDrive PonDrive Concorristion Concorristion Concorristion News Concorristion Concorristion News Concorristion Concorristion Pople

IP65 Rating Screen Panel

The front panel is designed to carry IP65 degree of protection which offer complete protection against particles, and a good level of protection against water, up to water projected by a nozzle against front panel from any direction.



Metal Housing

The aluminium case, with its fine workmanship and close fit with the screen, achieves front panel IP65.






Input Voltage 12-24V

Wide range of input voltages, which is a choice for different application environments

> ES France - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com

INDUSTRIAL HNI

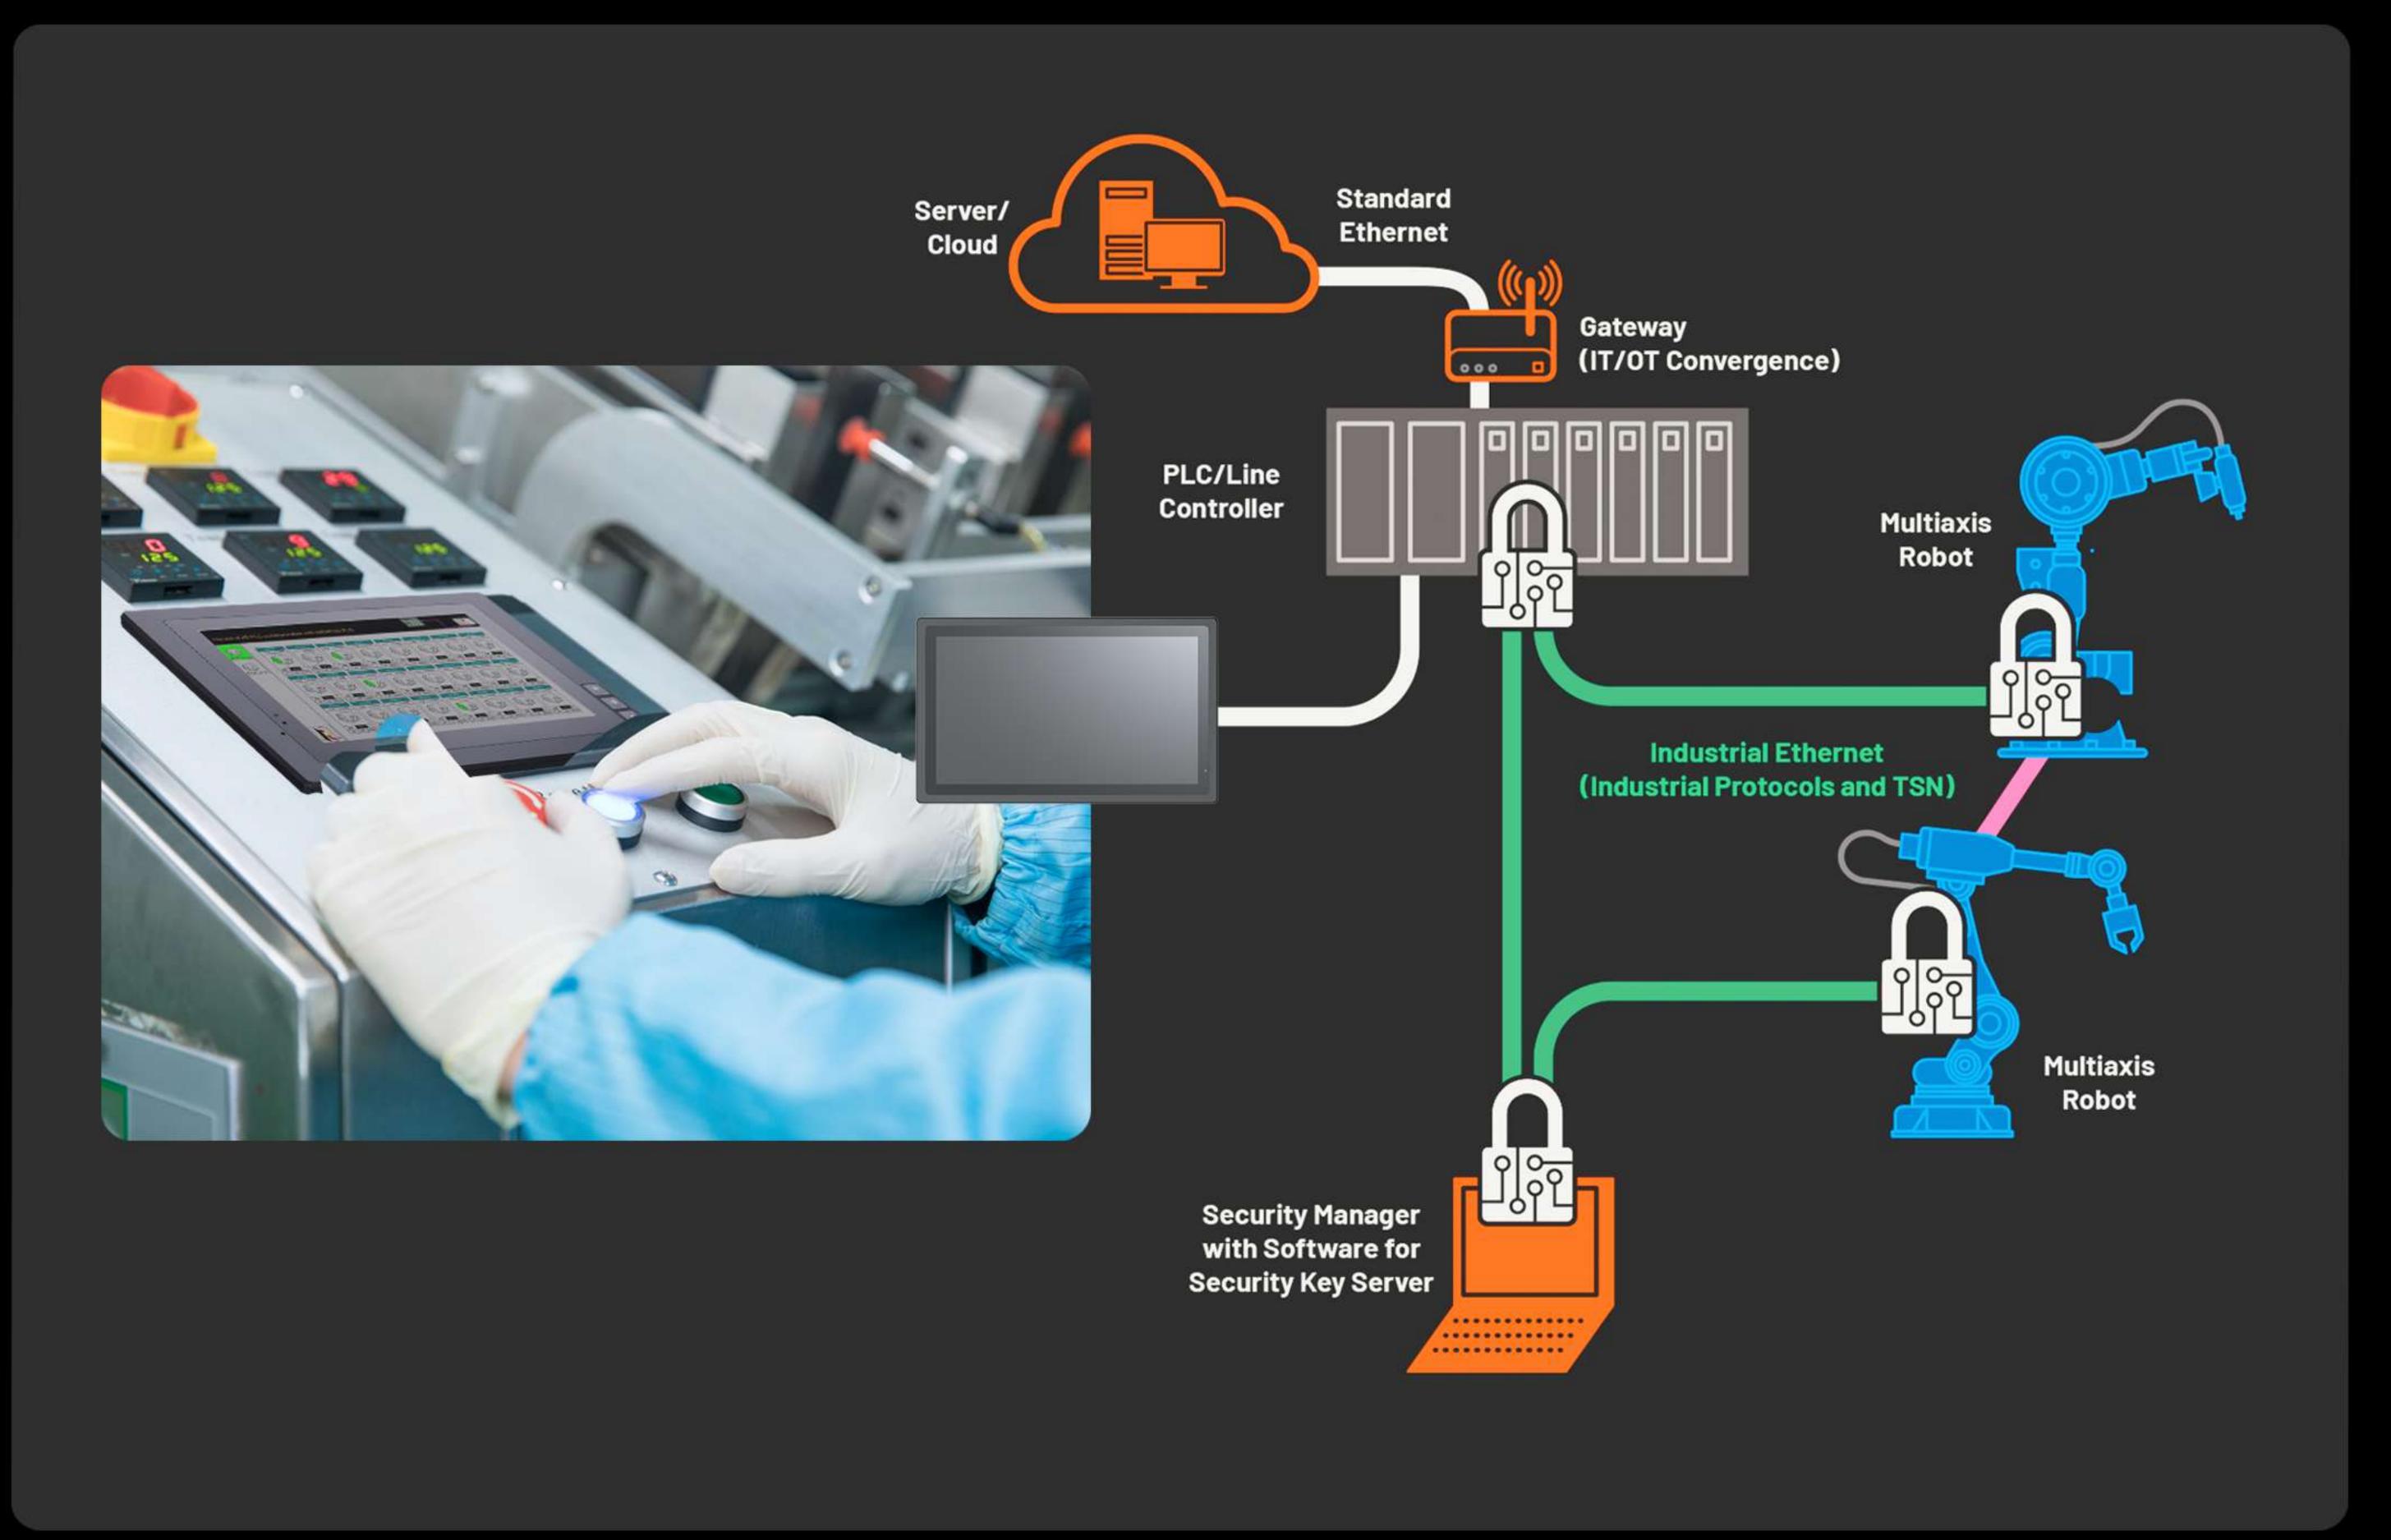

Industrial HMI Applications


Due to increasingly developed world of industrial automation, HMIs are used in a wide range of applications. As the controlling and monitoring core of automated processes, stability, efficiency and environmental adaptability are particularly important. Therefore, it is adapted to different scenarios.



Specifications

DISPLAY	Touch Screen	10-points capacitive touch
	Panel	21.5" LCD
	Physical Resolution	1920×1080
	Aspect Ratio	16:9
	Brightness	1000 nits
	Contrast	1000:1
	Viewing Angle	178°/ 178°(H/V)
INPUT	HDMI	1 × HDMI 1.4b
	VGA	1
	AV	1
SUPPORTED	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60,
FORMATS		1080i 50/60, 720p 50/60
AUDIO IN/OUT	Speaker	2
	HDMI	2ch
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
POWER	Input Voltage	DC 12-24V
	Power Consumption	≤37W (15V)
ENVIRONMENT	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~60°C
	Water-proof	Front Panel IP x5
	Dust-proof	Front Panel IP 6x
DIMENSION	Dimension(LWD)	556mm × 344.5mm × 48.2mm
	Weight	5.99kg

Structure

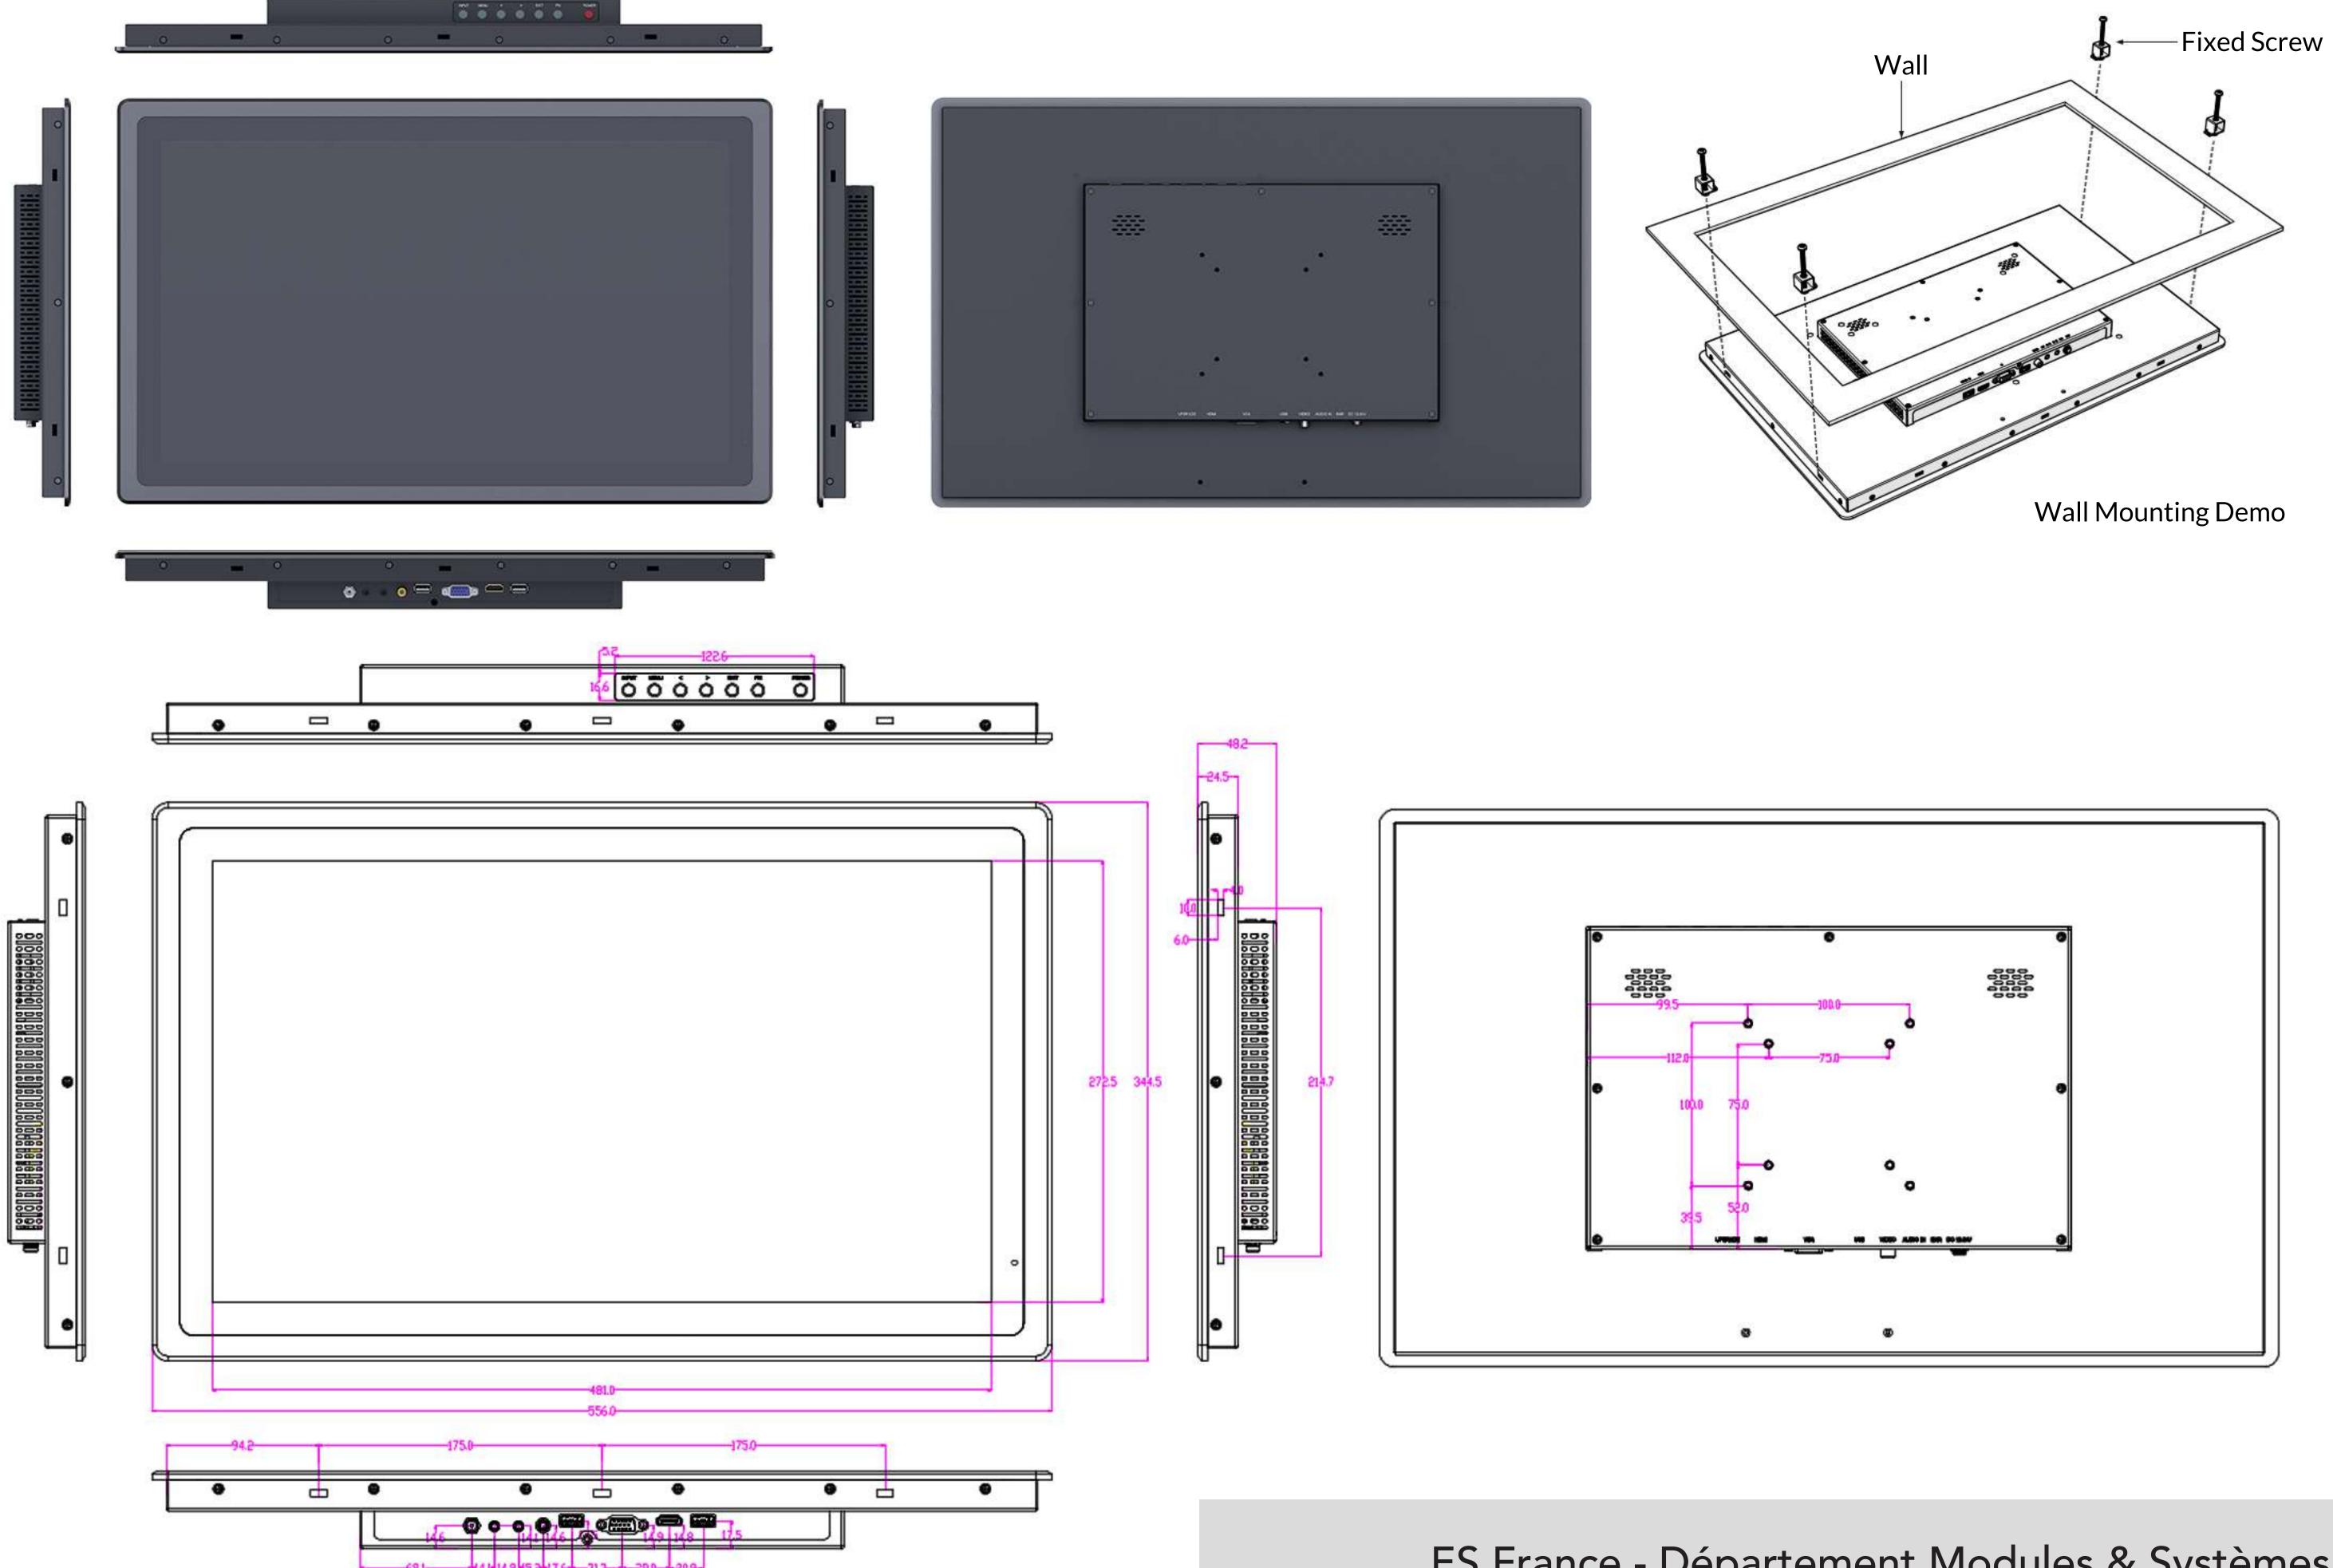

ES France - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com

ACCESSORIES



15V 3A DC Power Adapter



HDMI A to A Cable




VGA Cable





(The following elements are specific to customised items and do not represent parameters of this monitor)

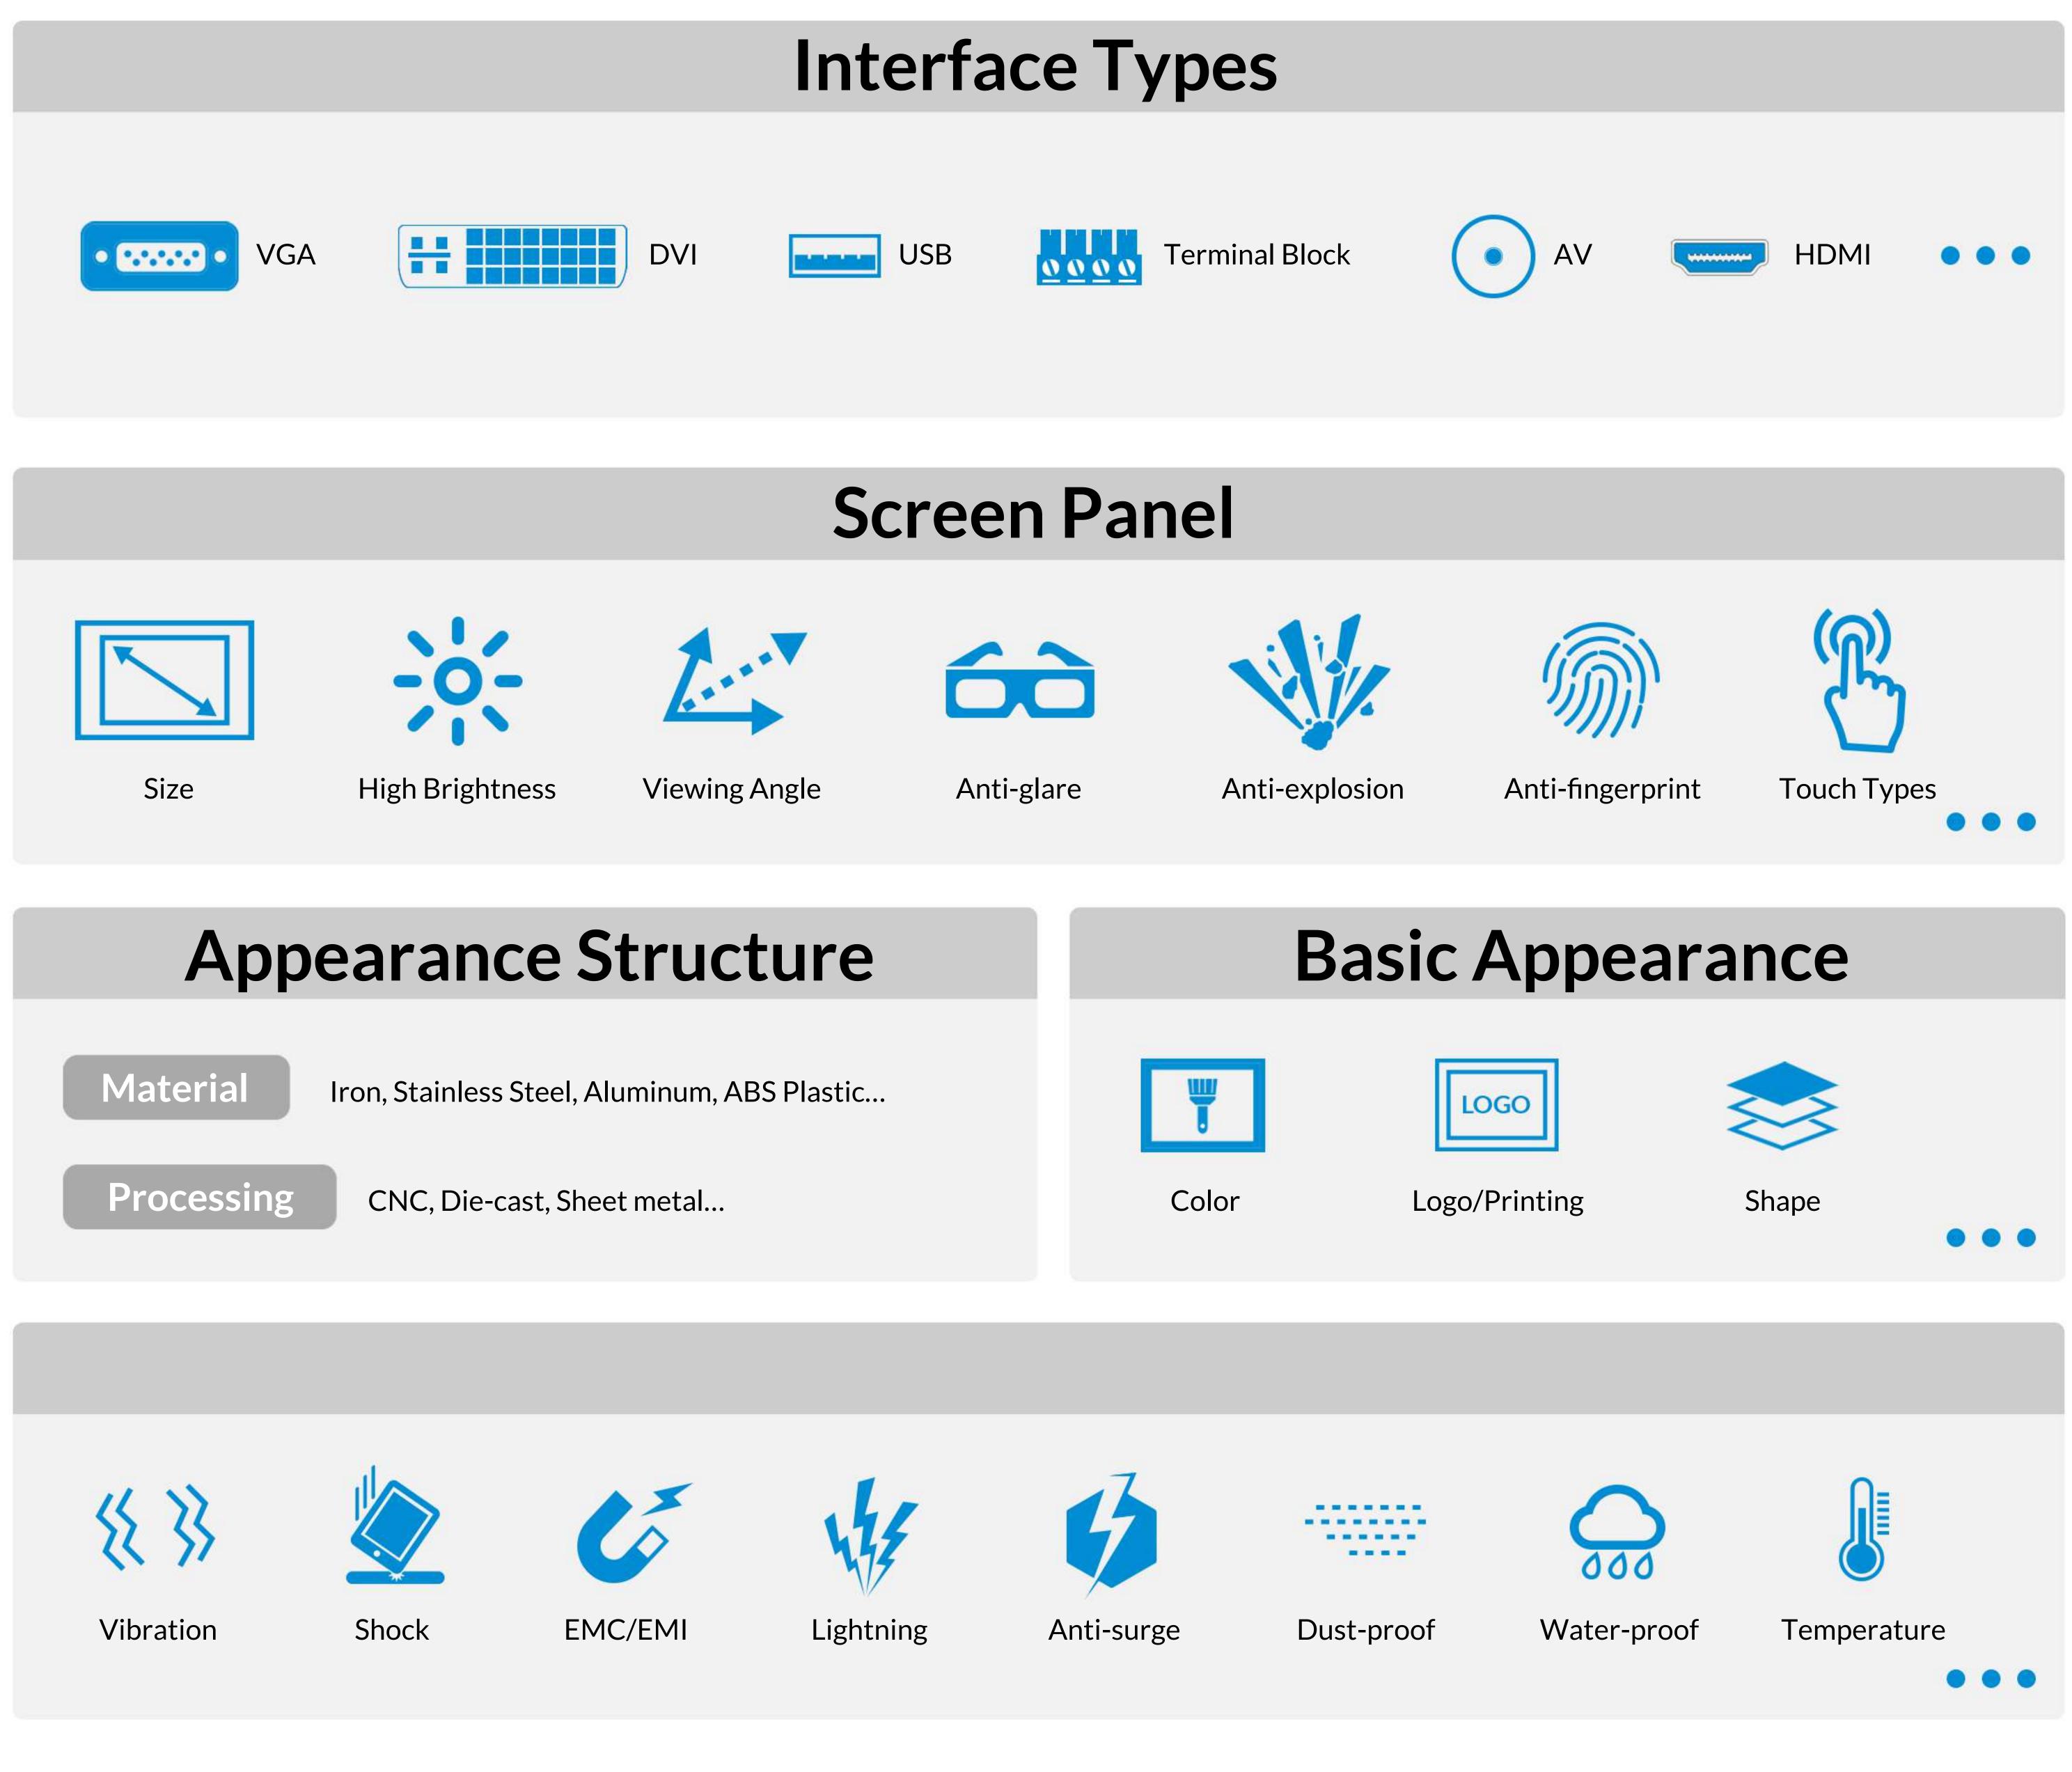





-	-	
0	0	

Cable Clamps

USB A to A Cable

Audio & Video Input Cable

Fixed Screws



ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.

Add: Fuqi North Road No.26, Zhang Zhou, Fu Jian, 363005, China 9661/2109323 Facebook: @lilliputmonitor Email: sales@lilliput.com

