



KANOMAX
The Ultimate Measurements

Multi-Channel Anemomaster PRO

MODEL 1590



Accurate simultaneous multi-channel measurement from large to narrow spaces


- 15 types of compatible probes for various applications
- The smallest class probe in the industry
- High heat resistance enables precise measurement even in tough environments.
- Large-scale system configuration with max.144 ch available
- Measurement in large-scale space is easy
- High portability of the main body makes it easy to use in vehicles.
- Improved probe response and accuracy, micro air velocity limit of 0.01 m/s

Flexible system construction that allows you to select the number of channels, measurement items, and sensor shape according to your purpose.

The accuracy and responsiveness of the entire velocity range, including the breeze speed range, which are highest level in the world. Multipoint measurement on up to 144 channels is realized with the industry's smallest level miniature probe, high heat resistance, and temperature measurement.

Due to the high portability of the main unit and the enhanced interface, we pursued simultaneous measurement of multiple points in a shorter time, more easily, and ease of use.

■System configuration Example

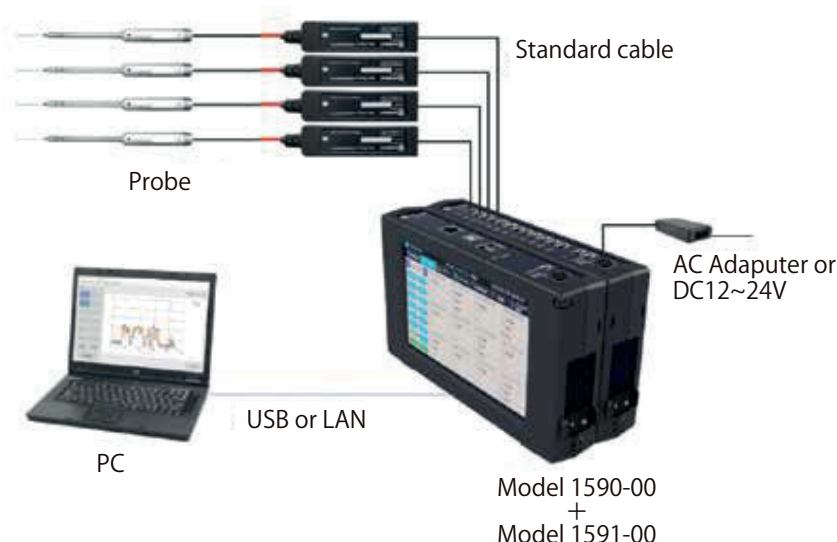

Main Unit
Model 1590-00



Hub Unit
Model 1591-00



Analog Unit
Model 1592-00

■Supports analog output

By connecting an optional analog unit, it is possible to record the measurement results to your data logger. Each analog unit has 12 channels, and the electric current or voltage can be selected for each channel. A maximum of 12 units and 144 channels can be added with one main unit, making it ideal for data collection using a data logger.

■Software


This product comes with a Windows version of the measurement software.

Simultaneous measurement of all channels of air velocity, temperature and humidity, and real-time graph display.

The measurement data is saved in text format and can be easily imported into table measurement software such as Excel.

There are two types of communication interfaces, USB and LAN.

There are two ways to configure the settings: by operating the touch panel on the main unit, or remotely from a PC via USB or LAN.

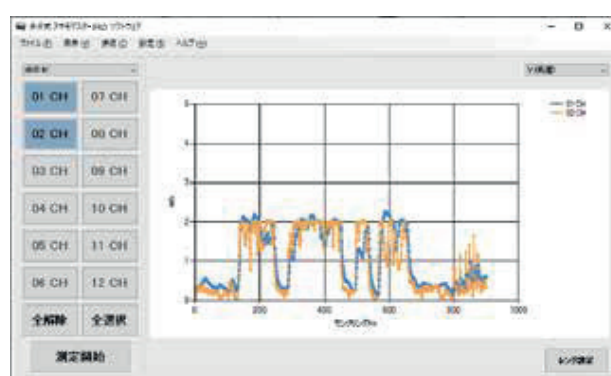

■Application Example

Thermal management of the ECU



Evaluation of heat measures for the electronic infrastructure



Airflow management indoors for semiconductor manufacturing equipment



Data center thermal management



15 Types of Probes Are Available

Model 0972-00



V : 0.01 ~ 50.0 m/s

Model 0973-00



V : 0.01 ~ 50.0 m/s

Model 0975-00



V : 0.01 ~ 25.0 m/s

Model 0975-09 / 21



V : 0.01 ~ 50.0 m/s (09)
V : 0.01 ~ 25.0 m/s (21)
T : 0 ~ 100 °C (21)

Model 0975-10



V : 0.01 ~ 50.0 m/s

Model 0976-03 / 13



V : 0.01 ~ 30.0 m/s
Operating temperature : 0 ~ 120 °C (03)
0 ~ 100 °C (13)

Model 0976-04 / 14



V : 0.01 ~ 30.0 m/s
Operating temperature :
0 ~ 120 °C (04)
0 ~ 100 °C (14)

Model 0975-31




V : 0.01 ~ 25.0 m/s
T : 0 ~ 60 °C
H : 5 ~ 95 %RH

Model 0976-05 / 15 0976-07 / 17



V : 0.01 ~ 30.0 m/s
T : 0 ~ 120 °C (05)
0 ~ 100 °C (15)
Operating temperature :
0 ~ 120 °C (05 / 07)
0 ~ 100 °C (15 / 17)
Probe height : 5.8 mm

Probe Dimensions

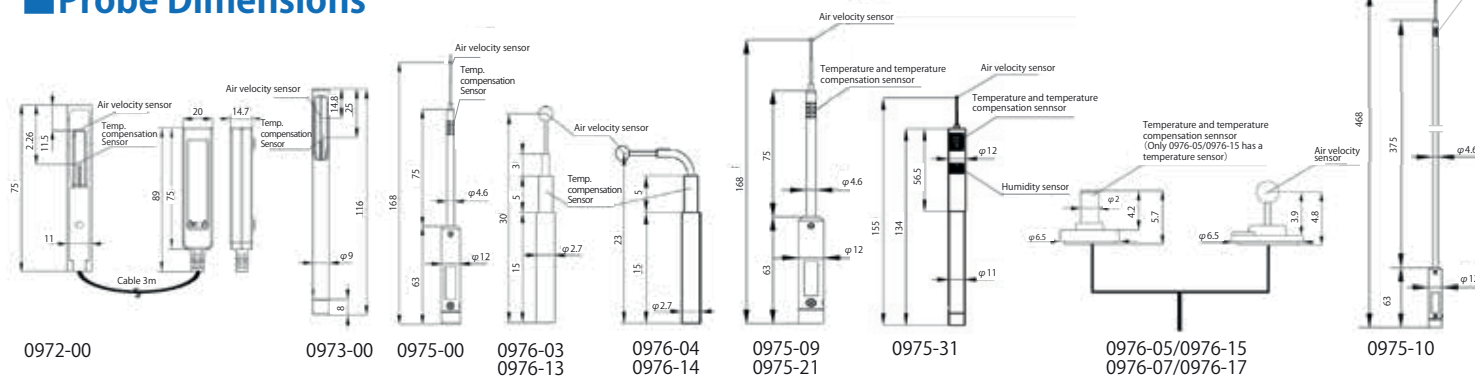

Available Accessories

AC adapter



Model 1580-10
Output power : 90W
Input : AC100-240V
50/60Hz, 1.5A

Standard cable



Model	Length
1580-30	0.5m
1580-31	2m
1580-32	5m
1580-33	10m
1580-34	20m
1580-35	40m

DC power connection cable



Model 1580-37
Length : 2m
Supply voltage : 12 ~ 24V
Power capacity : Maximum 6.25A
(Maximum about 150W)

Probe fixing jig



Model 1580-90
Compatible probe :
0976-03/04
0976-13/14
Upper-temperature limit : 150°C
Quantity : 20 pairs / 1 pack




Probe fixing example

Double-coated tape for 0976



Model 1580-92
Compatible probe :
0976-05/07
0976-15/17
Size : $\phi 5.5 \times 0.3\text{mm}$
Upper-temperature limit : 120°C
Quantity : 200 pairs / 1 pack

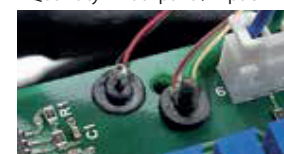

Example of probe with the double-coated tape

Specifications

Product		Multi-Channel Anemomaster PRO Main Unit
Model		Model 1590-00
Display, Operation		7-inch color LCD with touch panel
Communication Function	Data	USB Type-A: For USB memory
	Remote measurement	Modbus (Ethernet, USB Serial)
	Between units	RS485 (Standard cable)
Recording Media	Medium	Built-in memory
	Format	CSV format
	Recording capacity	8GB (One hub unit can measure 1000 sampling times, about 24500 times.)
External Trigger Input		Pin jack terminal Φ2.5 audio jack (Edge detection at start)
Language		Japanese, English, Chinese
Power Supply		DC12 to 24V (Select either one of 3 options below) 1) Connection with other unit, 2) AC adaptor (90W or 160W), 3) DC power cable
Power consumption		10W
Size		W220 mm × D130 mm × H40 mm
Weight		0.6 kg
Standard Accessories		AC Adapter (90W), Software (CD), Operation manual, USB cable, Stylus pen, Rubber cap
Warranty		1 year

Product		HUB Unit
Model		Model 1591-00
Number of channels		12ch
Communication Function	Between Probes	Serial communication (standard cable)
	Between Units	Serial communication (standard cable, connector)
Power Supply		DC12 ~ 24V Power supply method conforms
Power consumption		to the main unit
Size		Up to 50W
Weight		W220mm × D130mm × H40mm
Standard Accessories		0.5kg Setup guide, Connecting clips (2pcs)
Warranty		1 Year

Product			Analog Unit
Model			Model 1592-00
Number of channels			12ch
Communication Function		Between units	Serial communication (standard cable, connector)
Analog Output	Voltage output	Range	0 ~ 5V
		Output resistance	1kΩ
	Current output	Range	4 ~ 20mA
		Load resistance	250Ω
Power Supply			DC12 ~ 24V Power supply method conforms to the main unit
			10W
Size			W220mm × D130mm × H40mm
Weight			0.5kg
Standard Accessories			Setup guide、Connecting clips (2pcs)、 Rubber cap (2pcs)、Terminal block (3pcs)
Warranty			1 year

Common specifications for unit

Operating Environment	5~40°C, 0~85%RH (No Condensation)
Storage Environment	-10~60°C, 0~90%RH (No Condensation)

Specification of Probe

Model Number	Measurement Target	Directivity	Air Velocity			Wind Temperature		Humidity		Operating Temperature	Temperature compensation sensor
			Measurement Range	Measurement Accuracy	Responsivity	Measurement Range	Measurement Accuracy	Measurement Range	Measurement Accuracy		
0972-00 0973-00	Wind	Yes	0.01~50.0m/s	The larger of ± 2% or ± 0.02 m/s of the displayed value	1 second	—	—	—	—	0-100℃	± 5% of displayed value at 0-100 ℃
0975-00		0.01~25.0m/s	3 second								
0975-09 0975-10					0.01~50.0m/s						
0976-03 0976-04 0976-07		Speed	No	0.01~30.0m/s	The larger of ± 3% or ± 0.02 m / s of the displayed value					3 second	—
0976-13 0976-14 0976-17	The larger of ± 2% or ± 0.02 m/s of the displayed value	0-100℃			± 5% of displayed value at 0-100 ℃						
	The larger of ± 3% or ± 0.02 m/s of the displayed value	0-120℃			± 5% of displayed value at 0-120 ℃						
0976-05	Air Velocity and Temperature	0.01~25.0m/s		The larger of ± 2% or ± 0.02 m/s of the displayed value	0~120℃	±0.5%	5~95%RH	5~80%RH:3%RH 80~90%RH:5%RH	0-100℃	± 5% of displayed value at 0-100 ℃	
0976-15					0~100℃						
0975-21	0~60℃										
0975-31	Air Velocity, Temperature and Humidity										

Responsivity: Indicated value gets 0.9m/s or more than 0.9m/s to "air velocity 1m/s" or the certain temperature condition



KANOMAX
The Ultimate Measurements

KANOMAX USA, INC.

219 US Hwy 206, Andover NJ 07821 USA
TEL : +1 973-786-6386
E-mail : sales@kanomax.com
URL : www.kanomax-usa.com

● Distributed by :