

L BAND DC Block & Inserter


L-DCB/PN-DCI

Description

The Global Professional L BAND DC Block & Inserter has been designed to block any incoming DC on the input and to insert any voltage upto 48V@ Max 5amp.


The unit has negligible L band through Loss.

DC is injected via the filtered solder Connector.

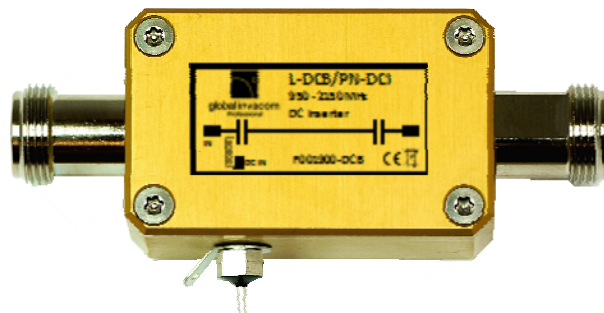


Specifications

Frequency Pass	950MHz - 2150MHz
L Band Through Loss 950 –2150MHz	>1dB
DC Voltage Insertion	48V Max
DC Current	5A Max
Connectors	'N' type as standard 50 Ohm
Dimensions	56mm x 35mm x 26mm
Mounting Dimensions	47mm x 26mm
Weight	100 grams
RoSH/WEEE Compliant	YES

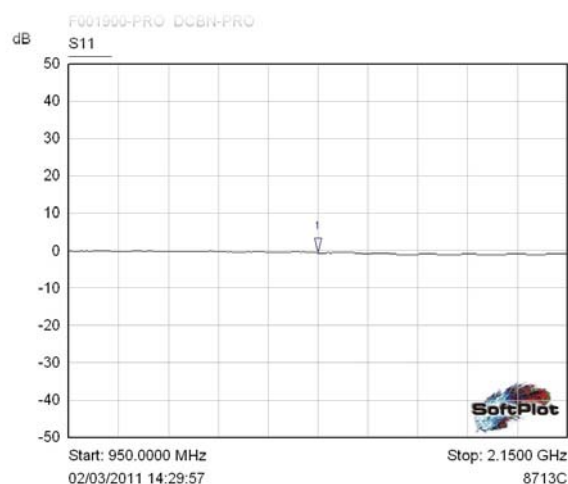

Mkr	Trace	X-Axis	Value	Notes
1	S11	1.5500 GHz	-0.59 dB	

LBand

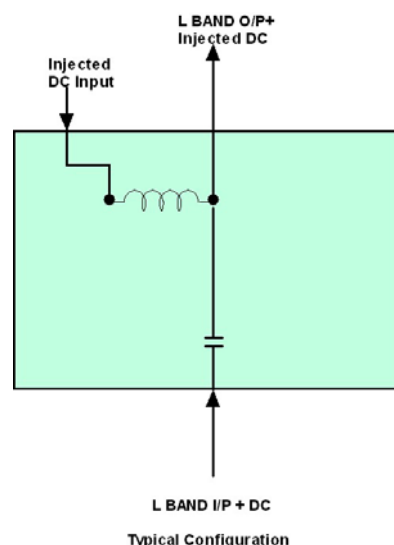

**Other Connector configurations available
upon request.**