




## GT OTC435 43" Curved Touchmonitor (C-type)

With C Type format, 4K UHD, vibrant colors, GT Curved Touchmonitors, allow for more impressive visual contents and captivating play. Sleek appearance, engaging visuals and accurate PCAP multi-touch experience let excited players immerse into the gaming atmosphere and enjoyment. It's an ideal touch solution widely used in the gaming, casino and sports betting.

### Features & Benefits

- Unique Industrial-grade Design
- Curved 1500R Comfortable Viewing Experience
- Accurate PCAP Multi-touch Technology
- 4K Resolution
- VESA Mounting, Portrait or Landscape
- Edge-to-edge Design, Easy to Clean
- DVI, HDMI, DP Interface

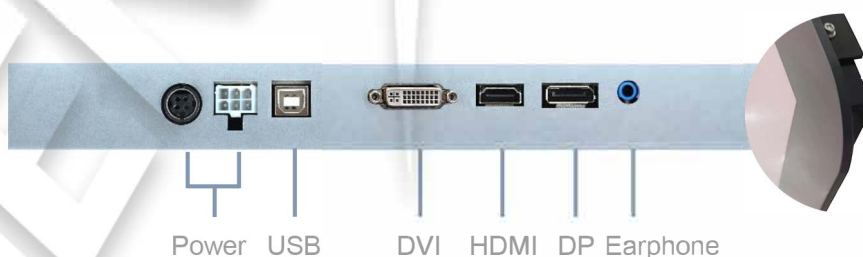

### Applications

- Gaming
- Retail
- Amusement Industry

## SPECIFICATIONS

|                            |                                             |
|----------------------------|---------------------------------------------|
| Name                       | 43" Curved Touchmonitor (C-type)            |
| Model                      | OTC435                                      |
| LCD Panel Parameters       |                                             |
| Display Technology         | Active Matrix TFT-LCD With LED Backlight    |
| Aspect Ratio               | 16:9                                        |
| Active Area (W x H)        | 941.18×529.42mm                             |
| Native Resolution          | 3840×2160@60Hz                              |
| Response Time (Typ.)       | 8ms                                         |
| Display Colors             | 1.07B                                       |
| Luminance (Typ.)           | 500nits                                     |
| Contrast Ratio (Typ.)      | 1100:1                                      |
| Viewing Angle (Typ.)       | Horizontal (left/right) CR≥10 89°/89°       |
|                            | Vertical (up/down) CR≥10 89°/89°            |
| Touch Screen Parameters    |                                             |
| Touch Technology           | Projected Capacitive (PCAP)                 |
| Surface Treatment          | Tempered or Chemically Strengthened         |
| Thickness(Total)           | 4.5±0.5mm                                   |
| Light Transmission         | ≥83%                                        |
| Response Time              | 8ms                                         |
| Touch Screen Interface     | USB                                         |
| Touch Point                | 10                                          |
| Overall Parameters         |                                             |
| Case/Bezel Color           | Black                                       |
| Radius of curvature        | R1500                                       |
| Mounting Options           | VESA: 600×300 mm                            |
| Outline Dimensions (W×H×D) | 1010.4mm × 619.60mm× 155.3mm                |
| Power Supply               | Input Voltage Range: +24VDC ± 5%            |
| On Screen Display (OSD)    | Control (back): Power, Auto, Up, Down, Menu |
| Power Consumption          | MAX: 100W                                   |
| Operating Altitude         | ≤3000m                                      |
| System support             | Win7 or later, Linux 4.4 or later           |

|                                                 |                                                |
|-------------------------------------------------|------------------------------------------------|
| Temperature Range                               | Operating: 0°C to 40°C, storage: -20°C to 60°C |
| Humidity (Non Condensing)                       | Operating: 20% to 80%, storage: 10% to 90%     |
| I/O                                             | HDMI, DVI, DP, USB (Type B)                    |
| Accessories                                     | Optional                                       |
| Carton Box Dimensions<br>(1 unit in one carton) | 1220mm (L) × 281mm (W) × 815mm (H)             |
| Weight                                          | Net: 23kg<br>Gross: 29kg                       |
| MTBF                                            | 50,000 hours demonstrated                      |
| Agency Approvals                                | CE , FCC                                       |

| Ordering Information     |             |                                                         |
|--------------------------|-------------|---------------------------------------------------------|
| Model                    | Part Number | Description                                             |
| OTC435-RC5000-UD4400-2.0 | TBD         | 43" "C type", 4K, 16:9, 500nits, PCAP, USB, HDMI/DVI/DP |

*Contact sales for other options*

| Optional Accessories |             |                                                                          |
|----------------------|-------------|--------------------------------------------------------------------------|
| Model                | Part Number | Description                                                              |
| Adaptor              | 130104171R  | G99-KEP150M-N001 Input:100-240V(VAC)-<br>Output :24(VDC)-6.25A-150W-4PIN |
| Power Cable          | 130300338R  | 1500mm                                                                   |
| USB Cable            | 130300224R  | 1500mm, male to male                                                     |
| DVI Cable            | 130300720R  | 1500mm ,male to male                                                     |
| HDMI Cable           | 130300881R  | 1500mm ,male to male                                                     |
| DP Cable             | 130300932R  | 1500mm ,male to male                                                     |

Go to [www.generaltouch.com](http://www.generaltouch.com) for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change , without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

**Tel:** 0086-28-85124120

**Fax:** 0086-28-85124115

**E-mail:** [info@generaltouch.com](mailto:info@generaltouch.com)

<http://www.generaltouch.com>