
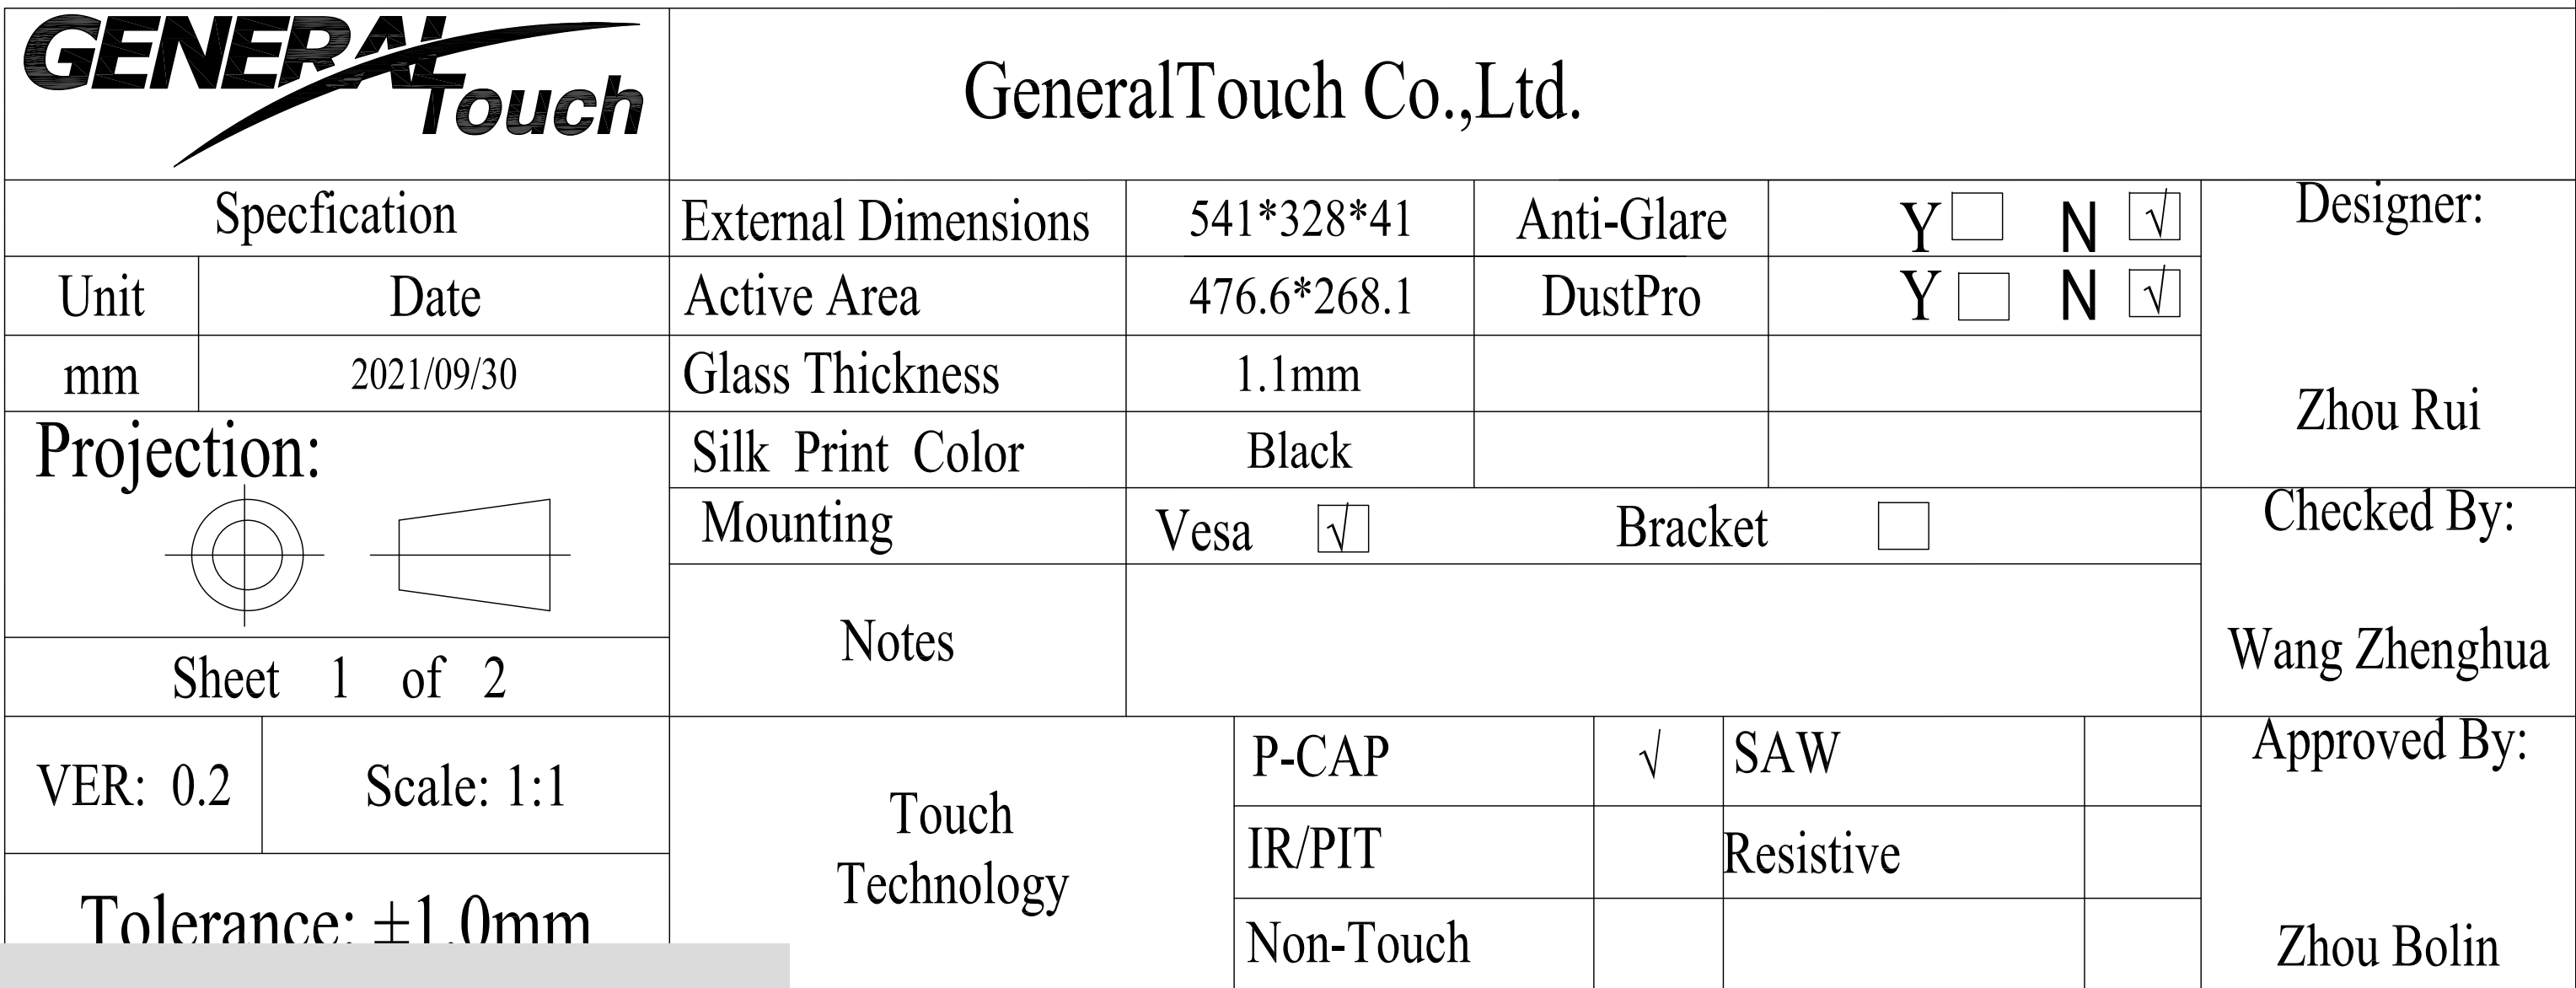




Mark	Revised Contents	Signature
		

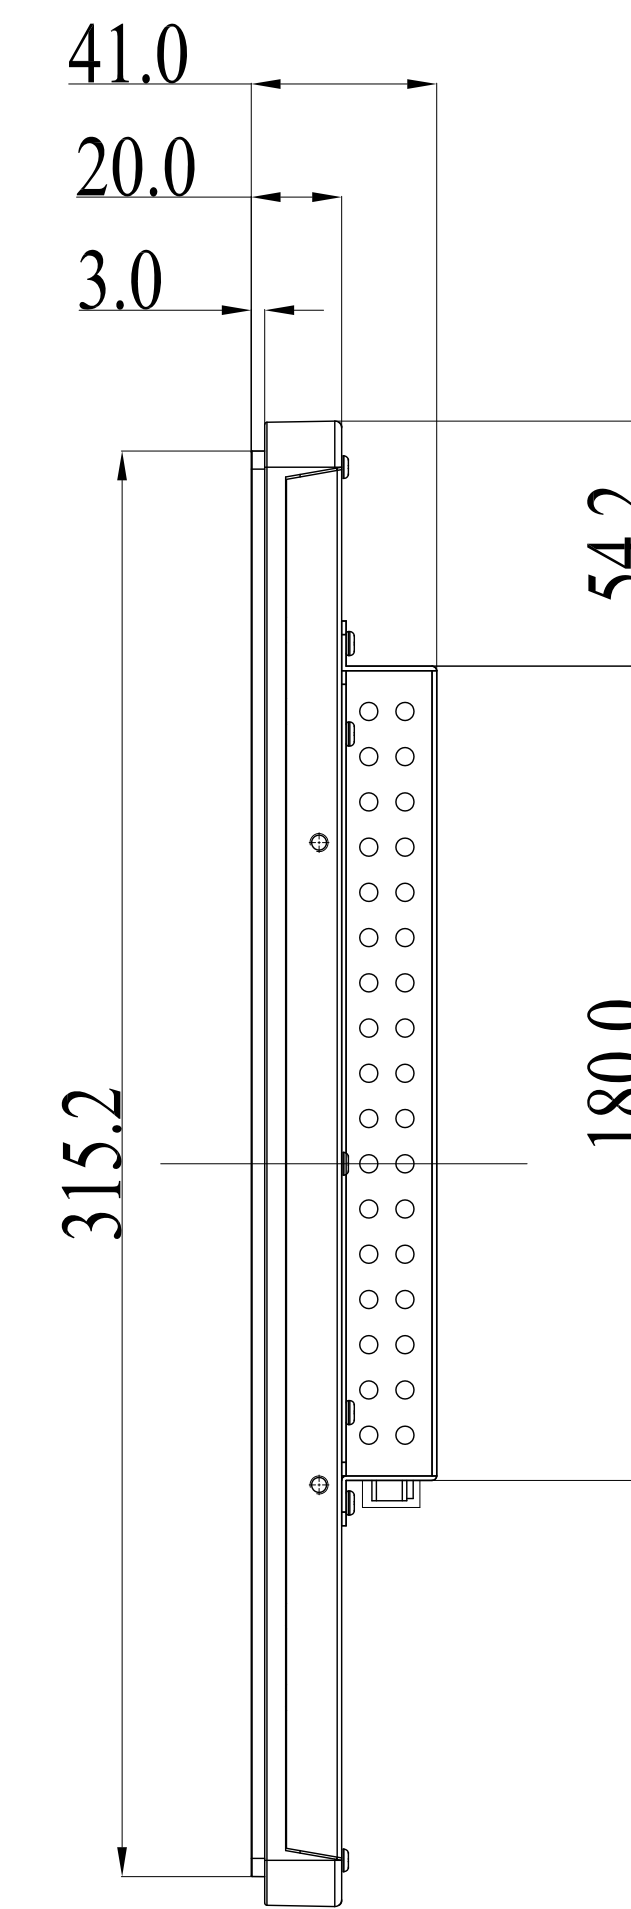

ALL DIMENSIONS ARE IN MILLIMETERS

ES France - Département Mobilité & Systèmes Embarqués - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com


Mark	Revised Contents	Signature
		

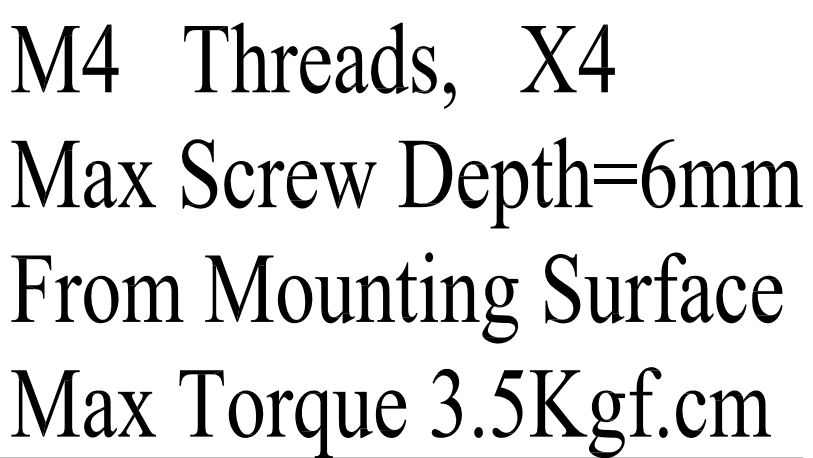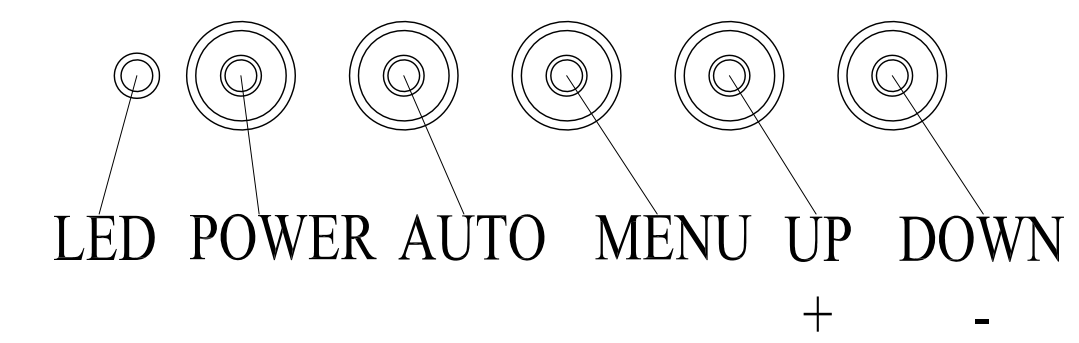

To ensure the service life of the whole machine.

1. Plastic parts should not be exposed to grease, acid or strong light for a long time.
2. The temperature of plastic parts must be lower than 80 °C, and there is a risk of softening and deformation when the temperature exceeds 80 °C;
3. The sheet metal parts shall not be exposed to acidic substances;
4. After stamping and cutting, the section of sheet metal parts is lack of zinc coating protection, and there will be rust.

ES France - Département Mobilité & Systèmes Embarqués - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com

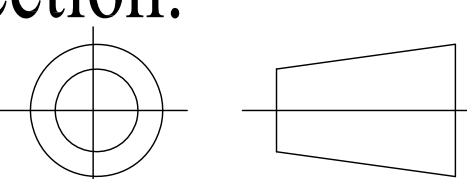GENERAL Touch		GeneralTouch Co.,Ltd.						
Specification		External Dimensions	563*350*41		Anti-Glare	Y ☐	N ☒	Designer: Zhou Rui
Unit	Date	Active Area	476.6*268.1		DustPro	Y ☐	N ☒	
mm	2021/09/30	Glass Thickness	1.1mm					
Projection: 		Silk Print Color	Black					Checked By: Wang Zhenghua
		Mounting	Vesa ☒	Bracket ☒				
Sheet 2 of 2		Notes						Approved By: Zhou Bolin
VER: 0.2	Scale: 1:1	Touch Technology	P-CAP	☒	SAW			
Tolerance: ±1.0mm			IR/PIT		Resistive			
			Non-Touch					