

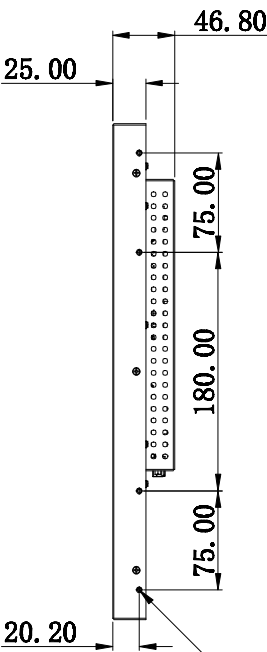


TITLE: RTL273-R04-SUHPCDA


MARK	REVISED CONTENTS	DATE	SIGNATURE
△			

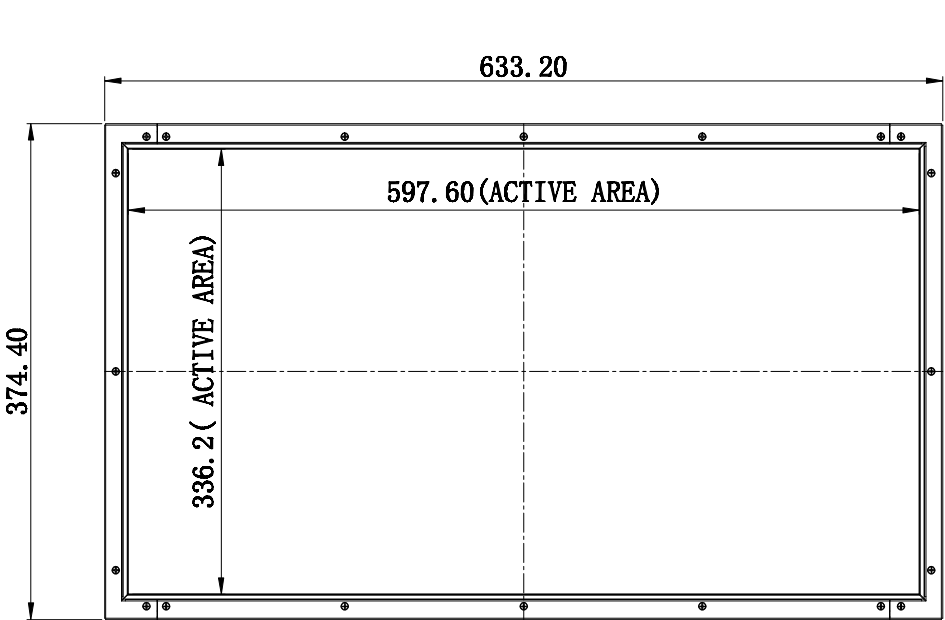

SIDE MOUNT, (LEFT AND RIGHT)
M4 THREADS, MAX THREAD DEPTH= 6MM, X4

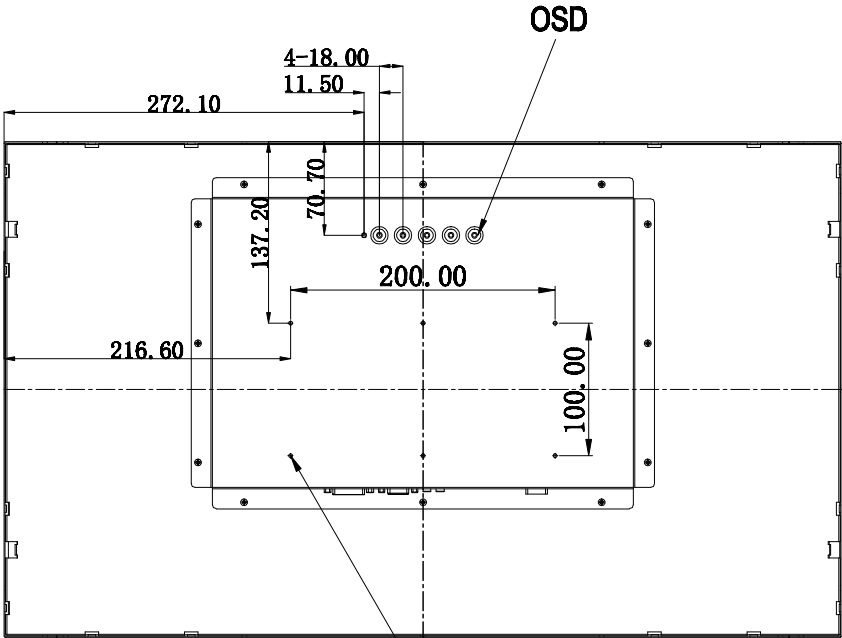

VESA:MOUNT
200X100, M4 THREADS
MAX THREAD DEPTH = 7mm , X6

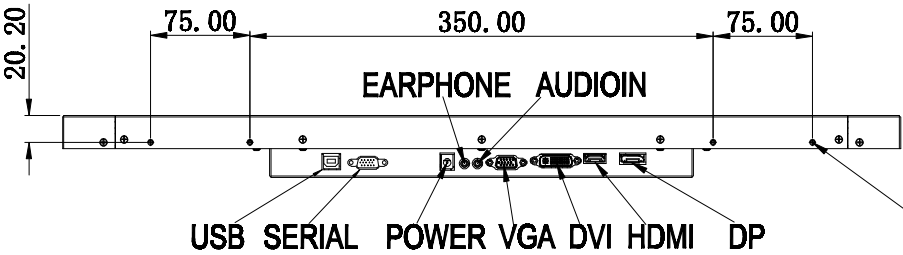




SIDE MOUNT, (TOP AND BOTTOM)
M4 THREADS, MAX THREAD DEPTH= 6MM, X4

ALL DIMENSIONS ARE IN MILLIMETERS

GENERAL Touch		GeneralTouch Co., Ltd.					
SPEC or MATERIAL REMARK		External Dimensions	633.2*374.4*46.8	Anti-Glare	Y ☐ N ☒	DESIGNER:	
UNIT	DATE	Active Area	597.6*336.2	DustPro	Y ☐ N ☒	WangZhengHua	
mm	2019/12/30	Glass Thickness	4.0			CHECKED:	
Projection:		Silk Print Color				DuanWenBin	
		Mounting	Vesa ☒ Bracket ☐	NOTES		APPROVED:	
SHEET 1 OF 2		TOUCH TECHNOLOGY		P-CAP		ZhouBoLin	
RVE: 0.1		SCALE: 1:1		IR/PIT			
Tolerance: ±1.5mm				Non-Touch			

TITLE: RTL273-R04-SUHPCDA

MARK	REVISED CONTENTS	DATE	SIGNATURE
△			

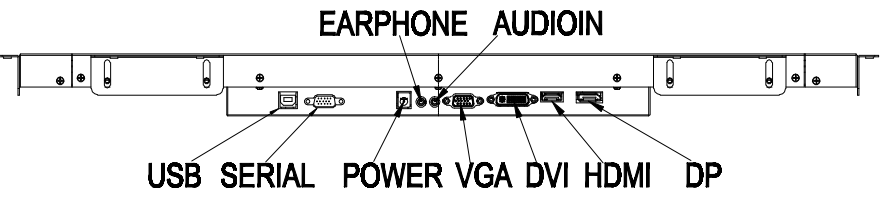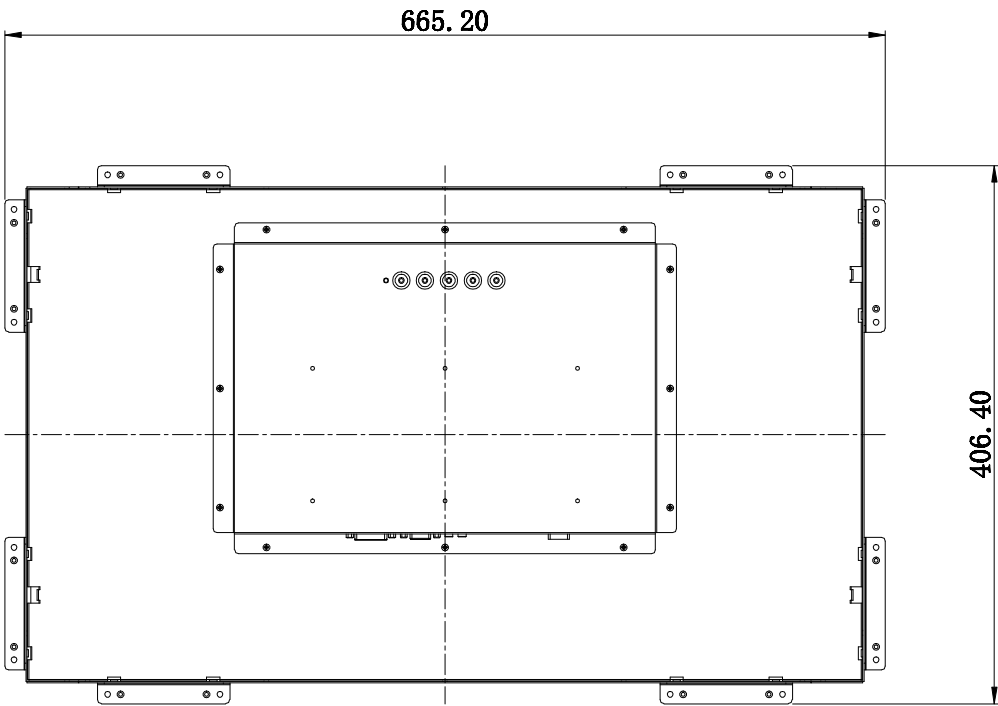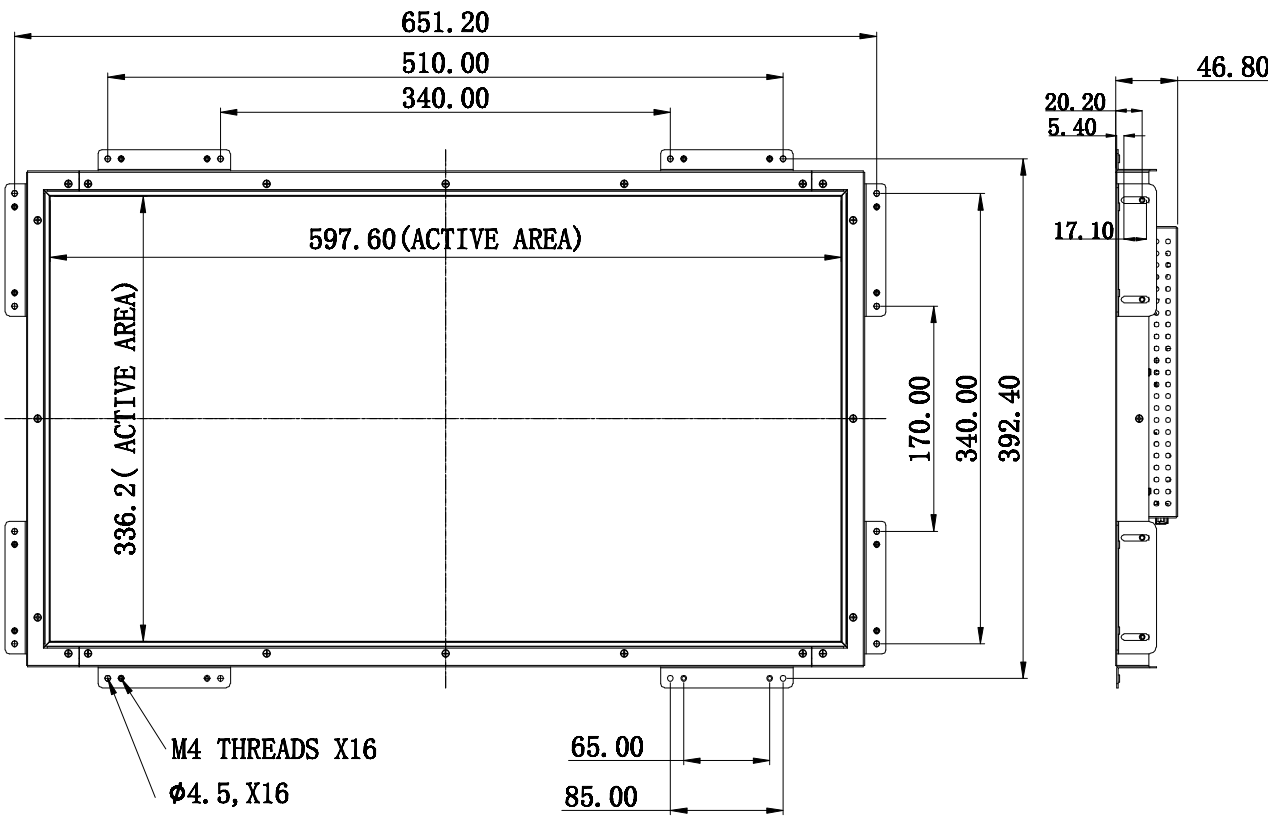

GENERAL Touch		GeneralTouch Co., Ltd.					
SPEC or MATERIAL REMARK		External Dimensions	633.2*374.4*46.8	Anti-Glare	Y ☐ N ☒	DESIGNER: Duan Wen Bin	
UNIT		Active Area	597.6*336.2	DustPro	Y ☐ N ☒		
mm		Glass Thickness	4.0			CHECKED: Wang Zheng Hua	
Projection:		Silk Print Color					
		Mounting	Vesa ☒	Bracket	☒	APPROVED: Zhou Bo Lin	
SHEET 2 OF 2		NOTES					
RVE: 0.1		TOUCH TECHNOLOGY	P-CAP	SAW	☒		
SCALE: 1:1			IR/PIT	RESISTIVE			
Tolerance: ±1.5mm			Non-Touch				

ALL DIMENSIONS ARE IN MILLIMETERS