
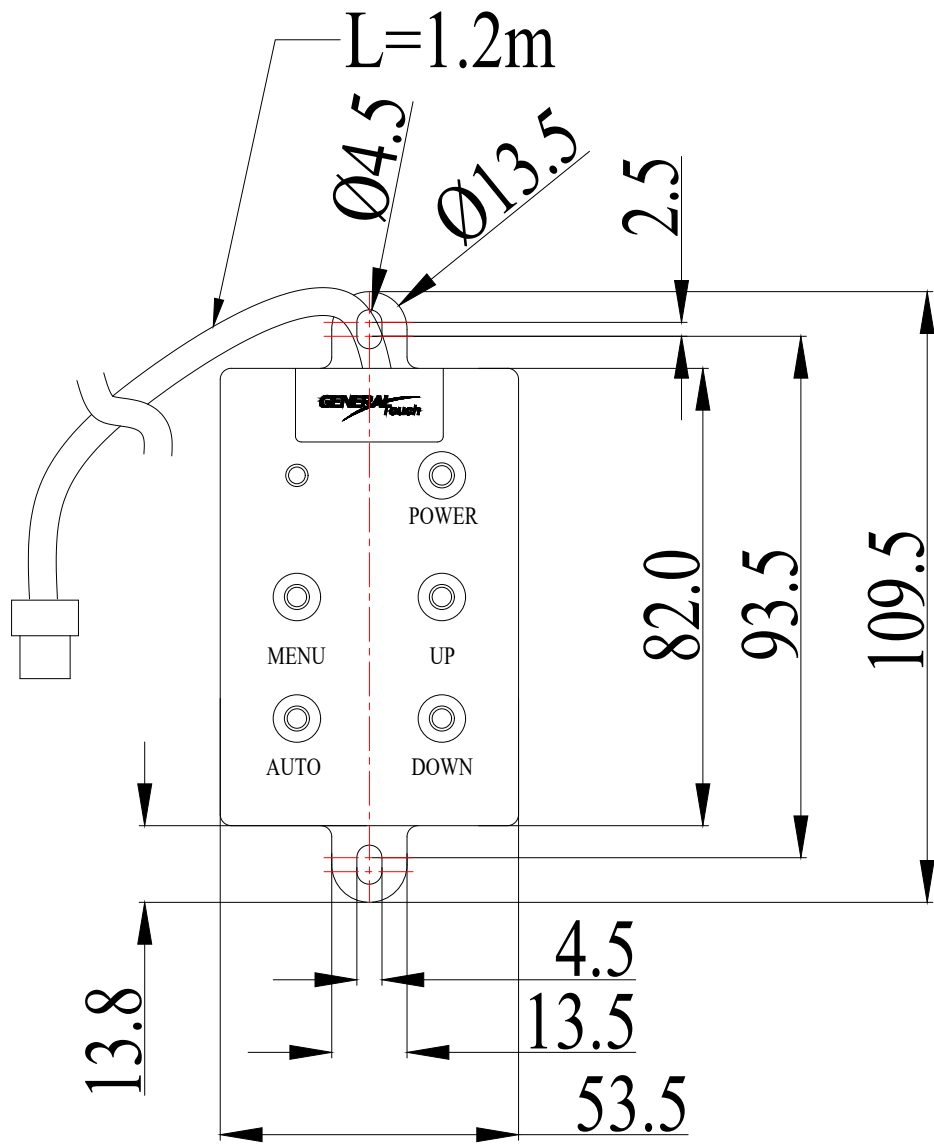
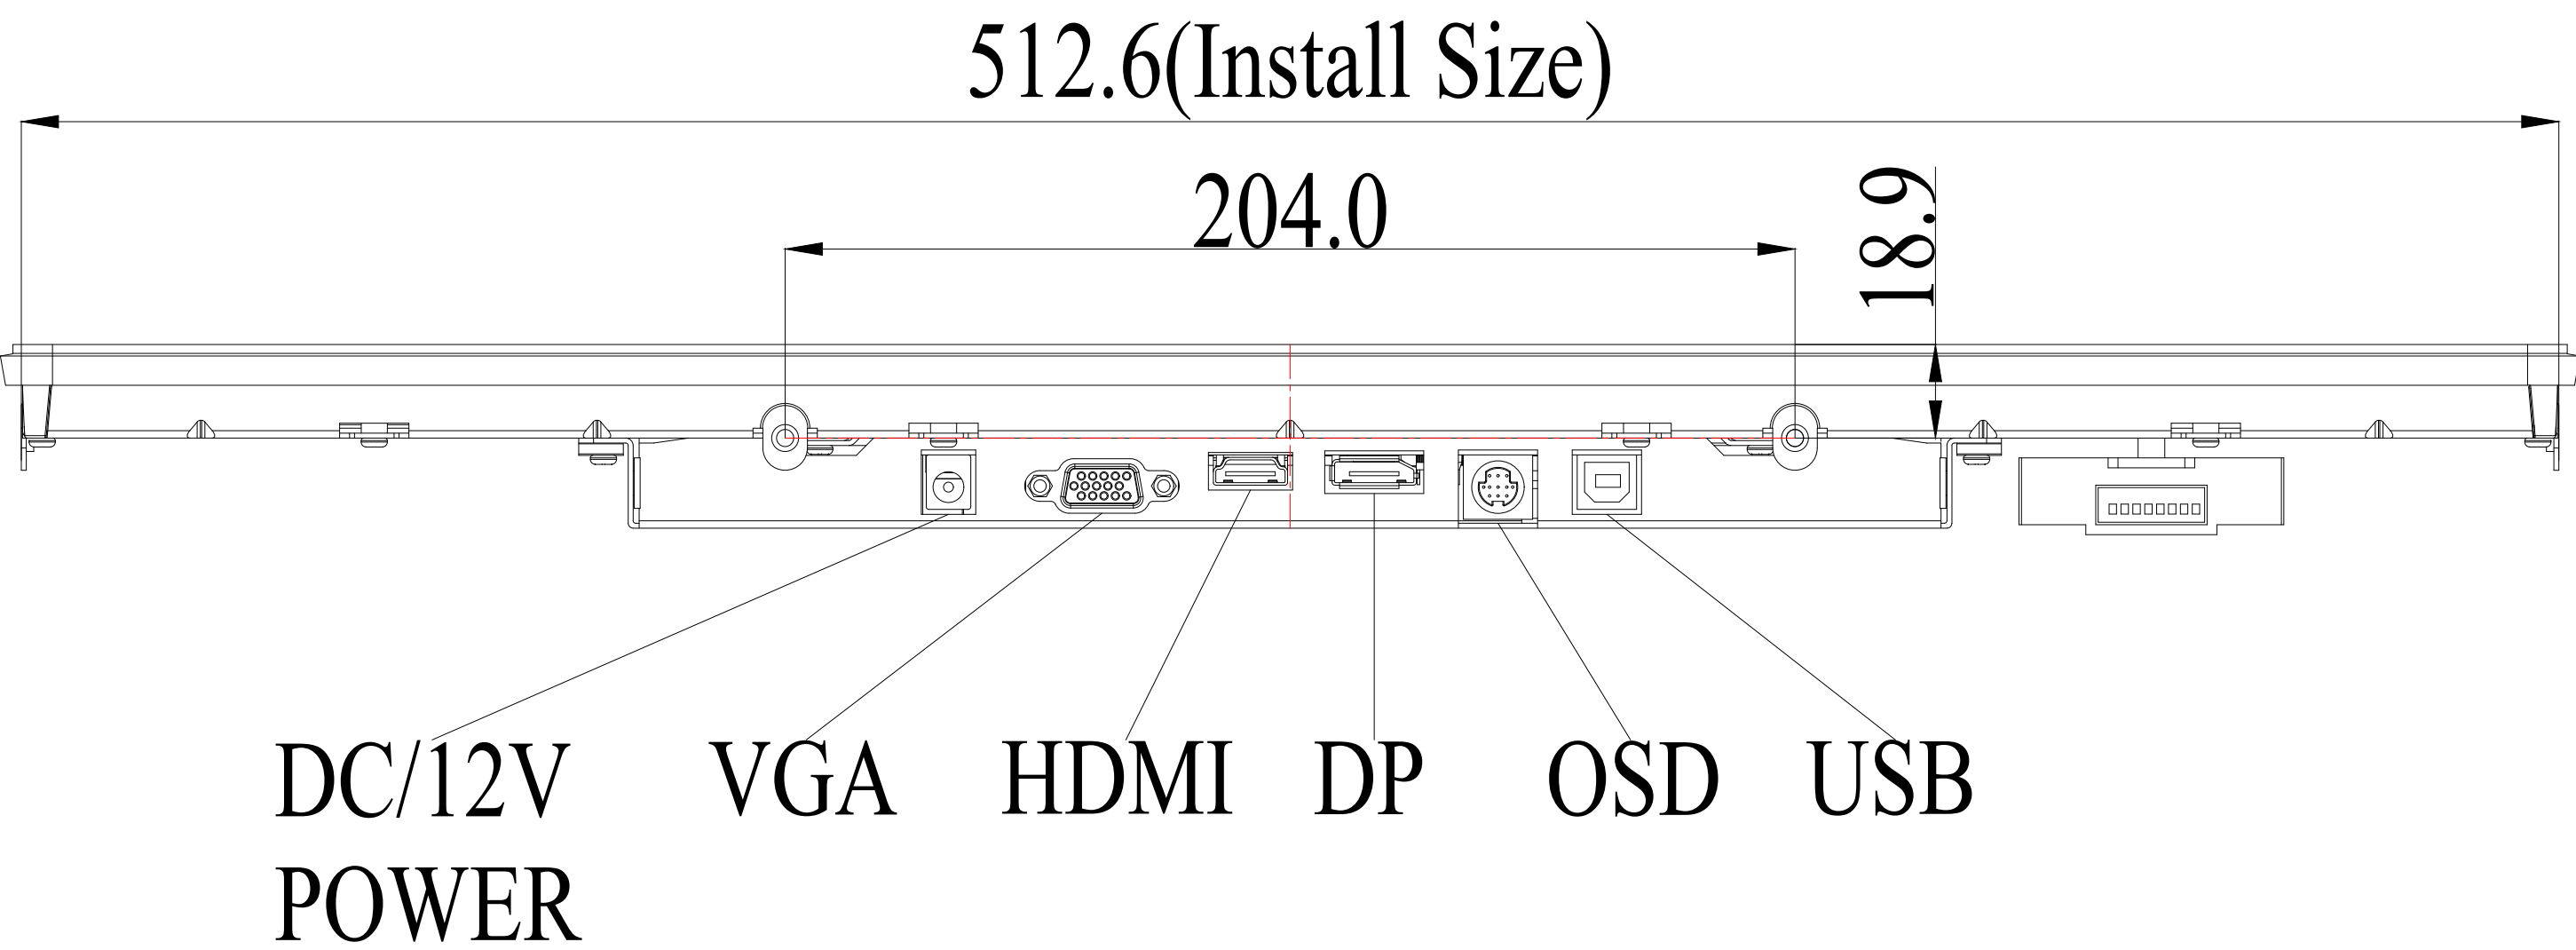
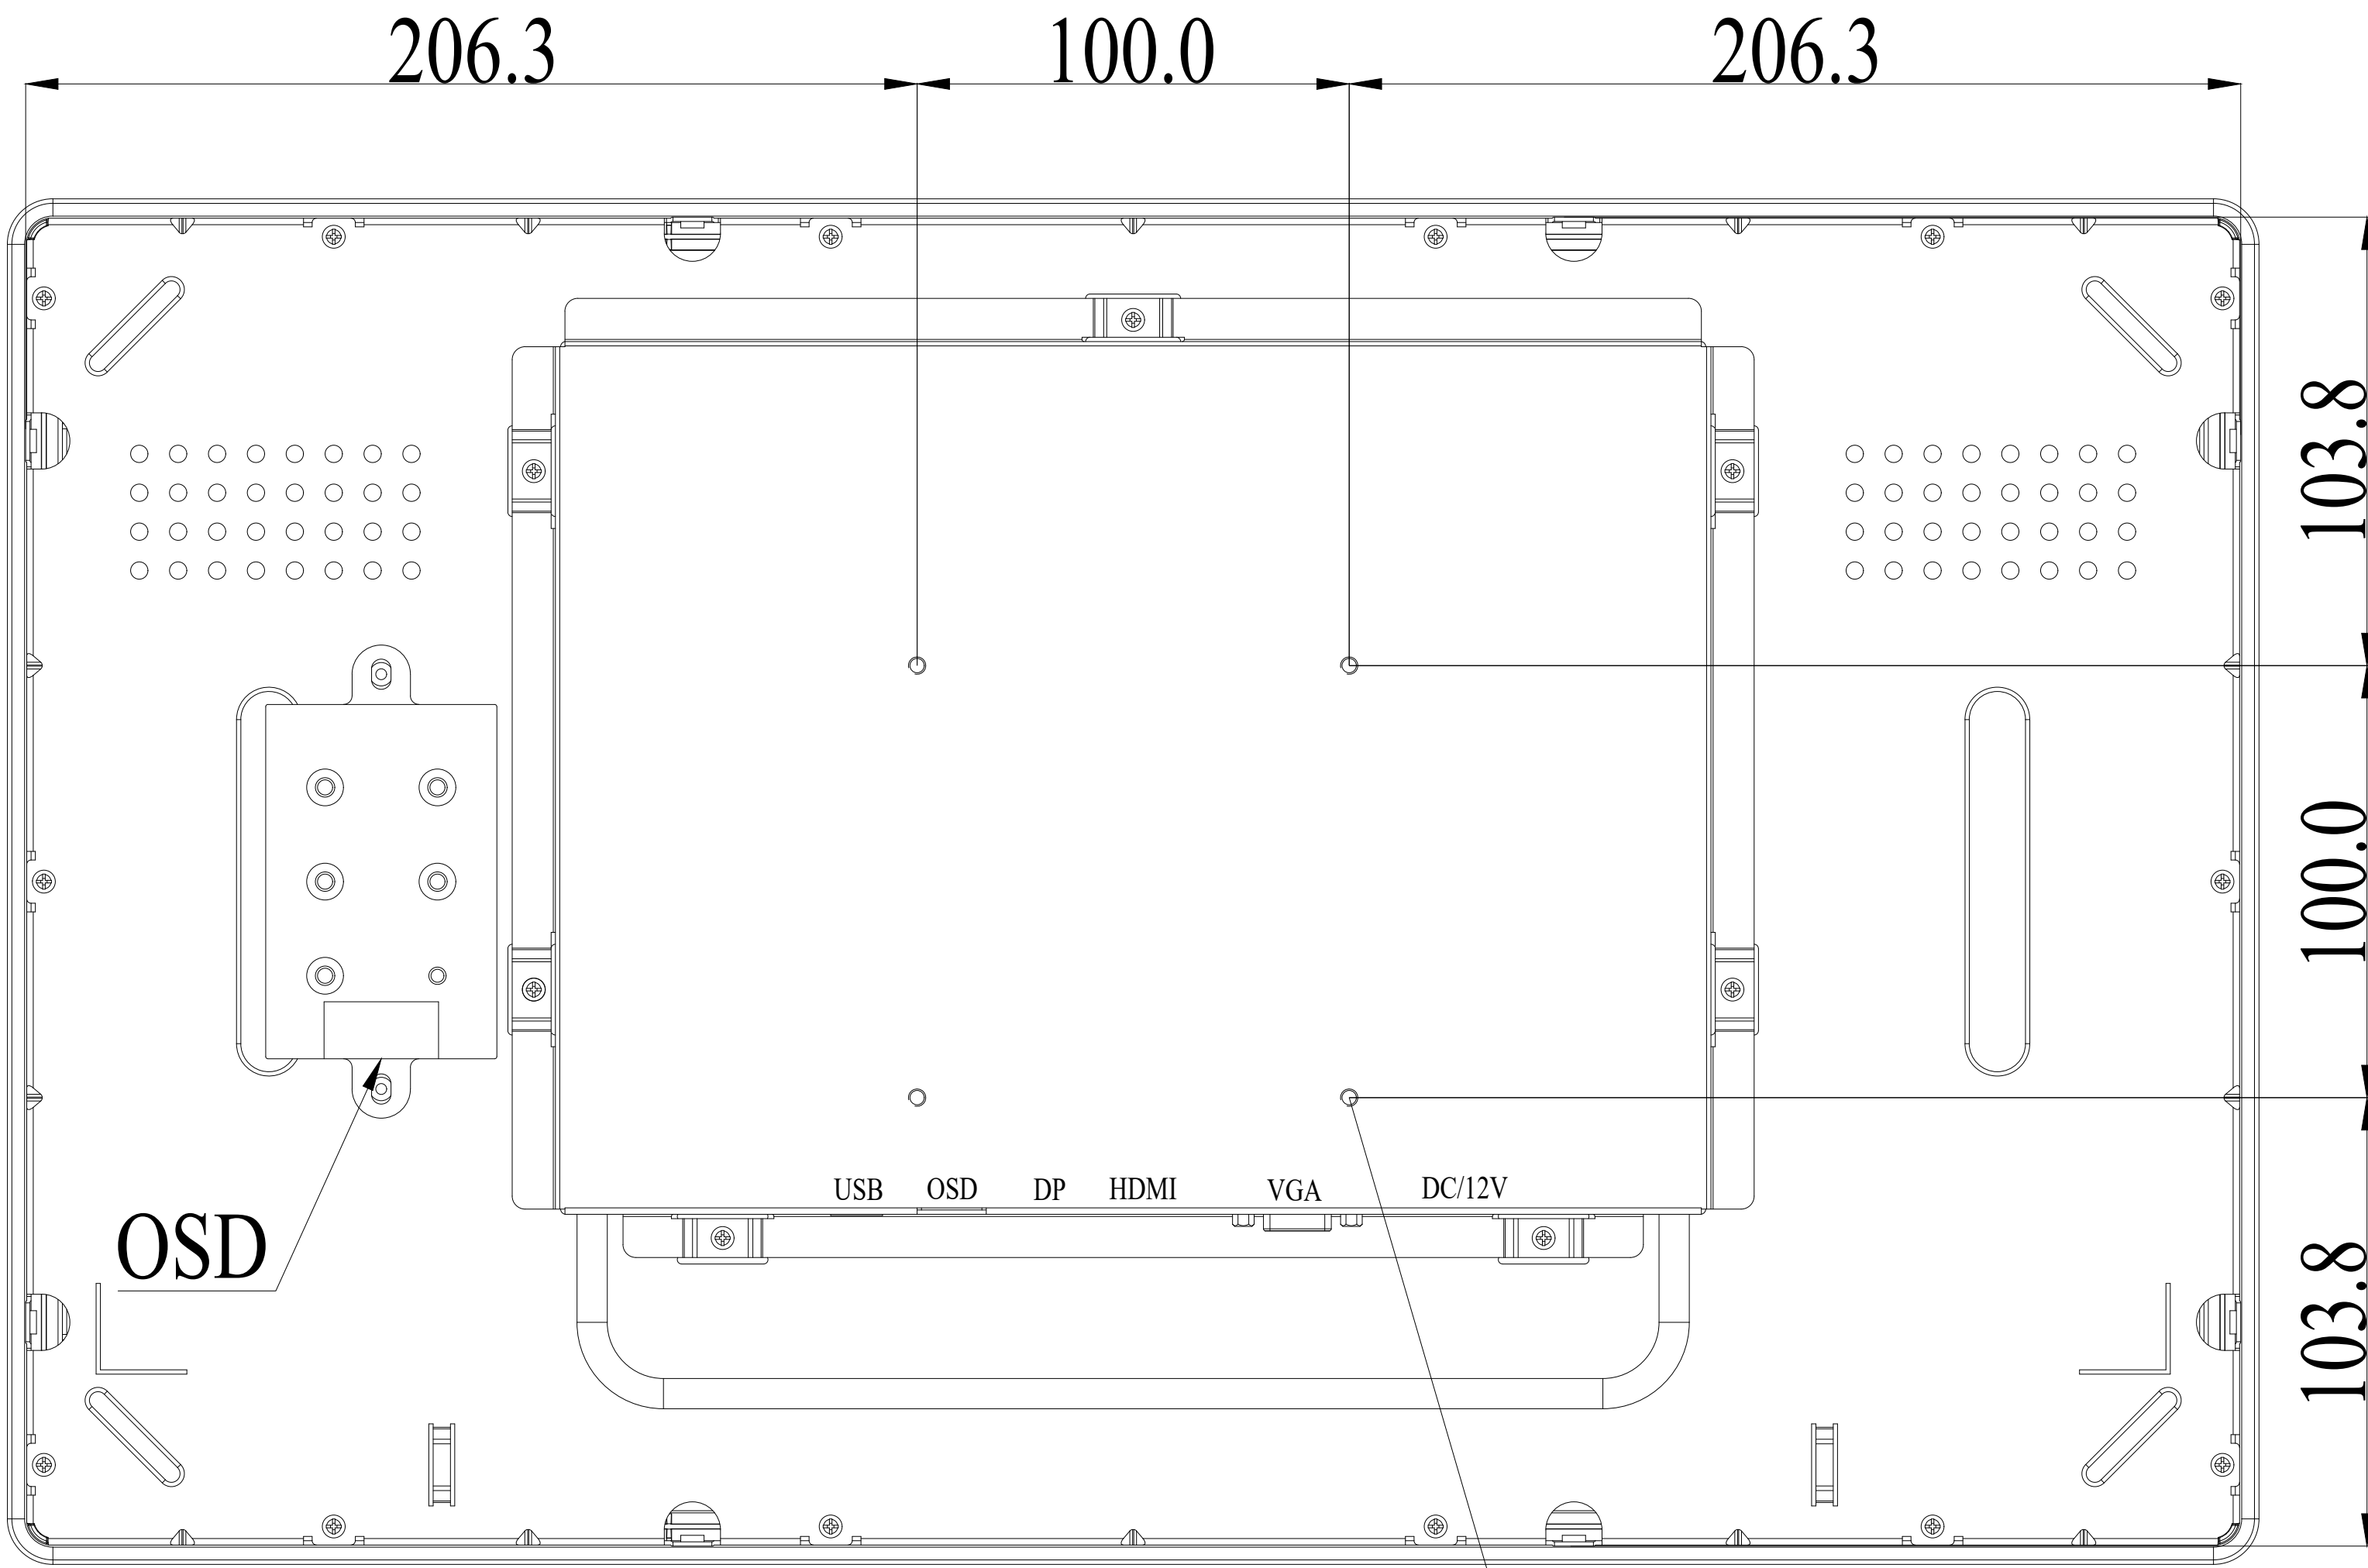
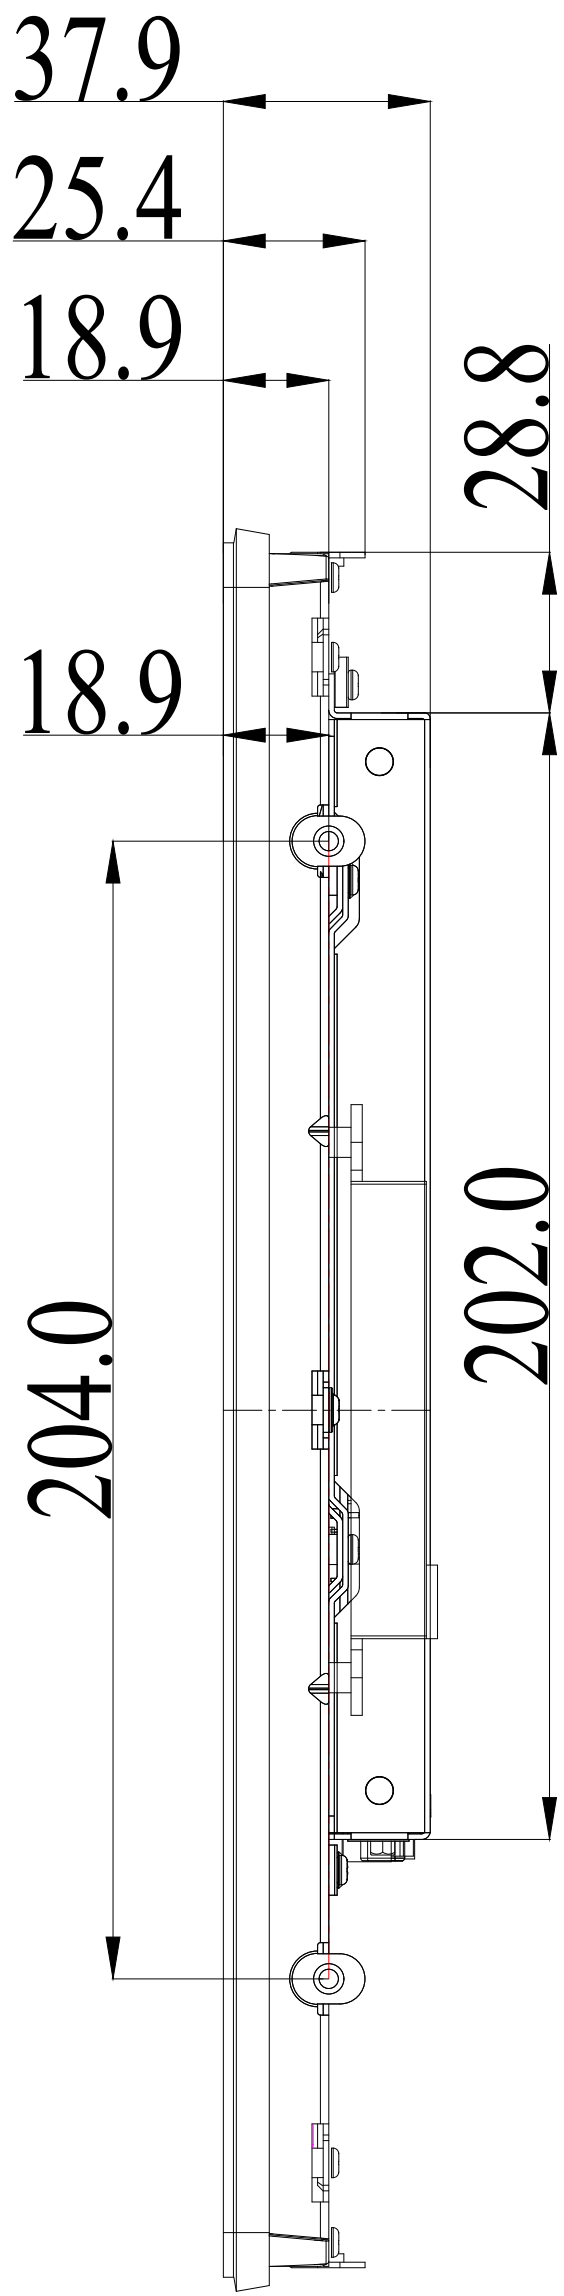
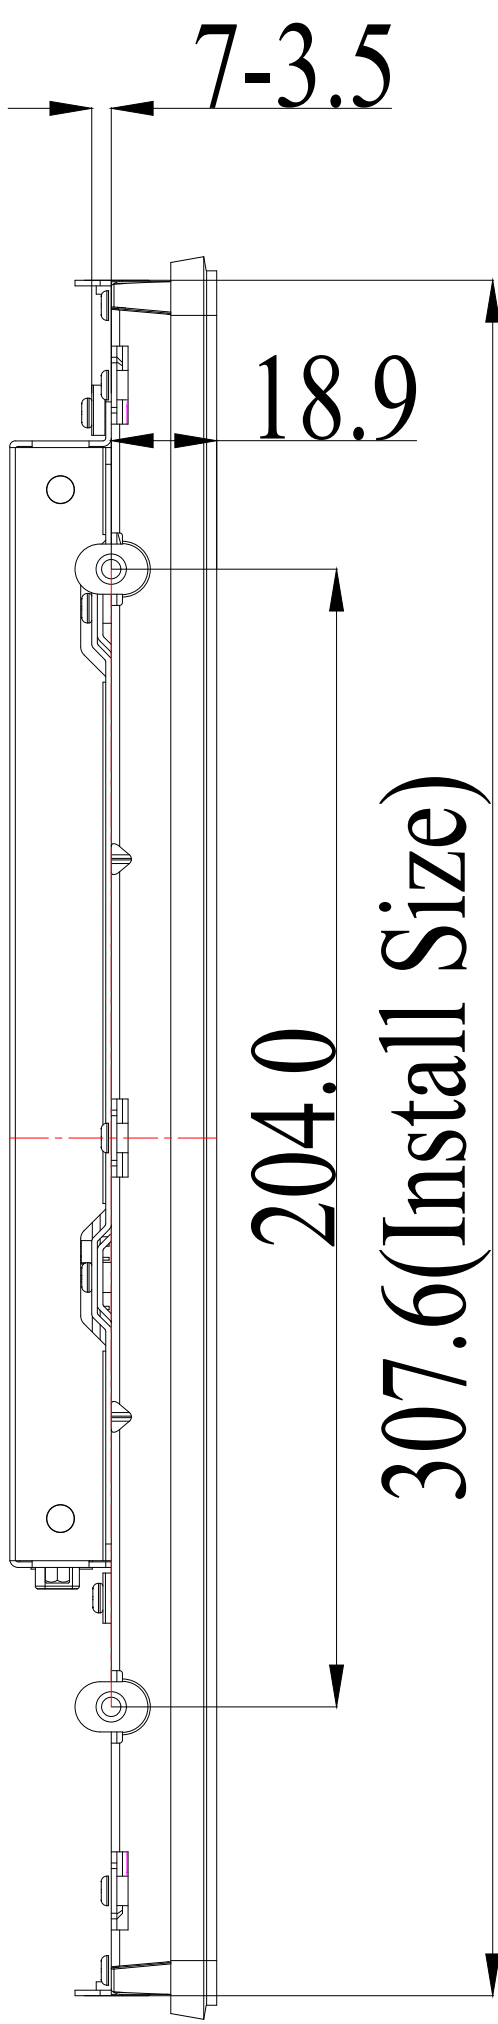
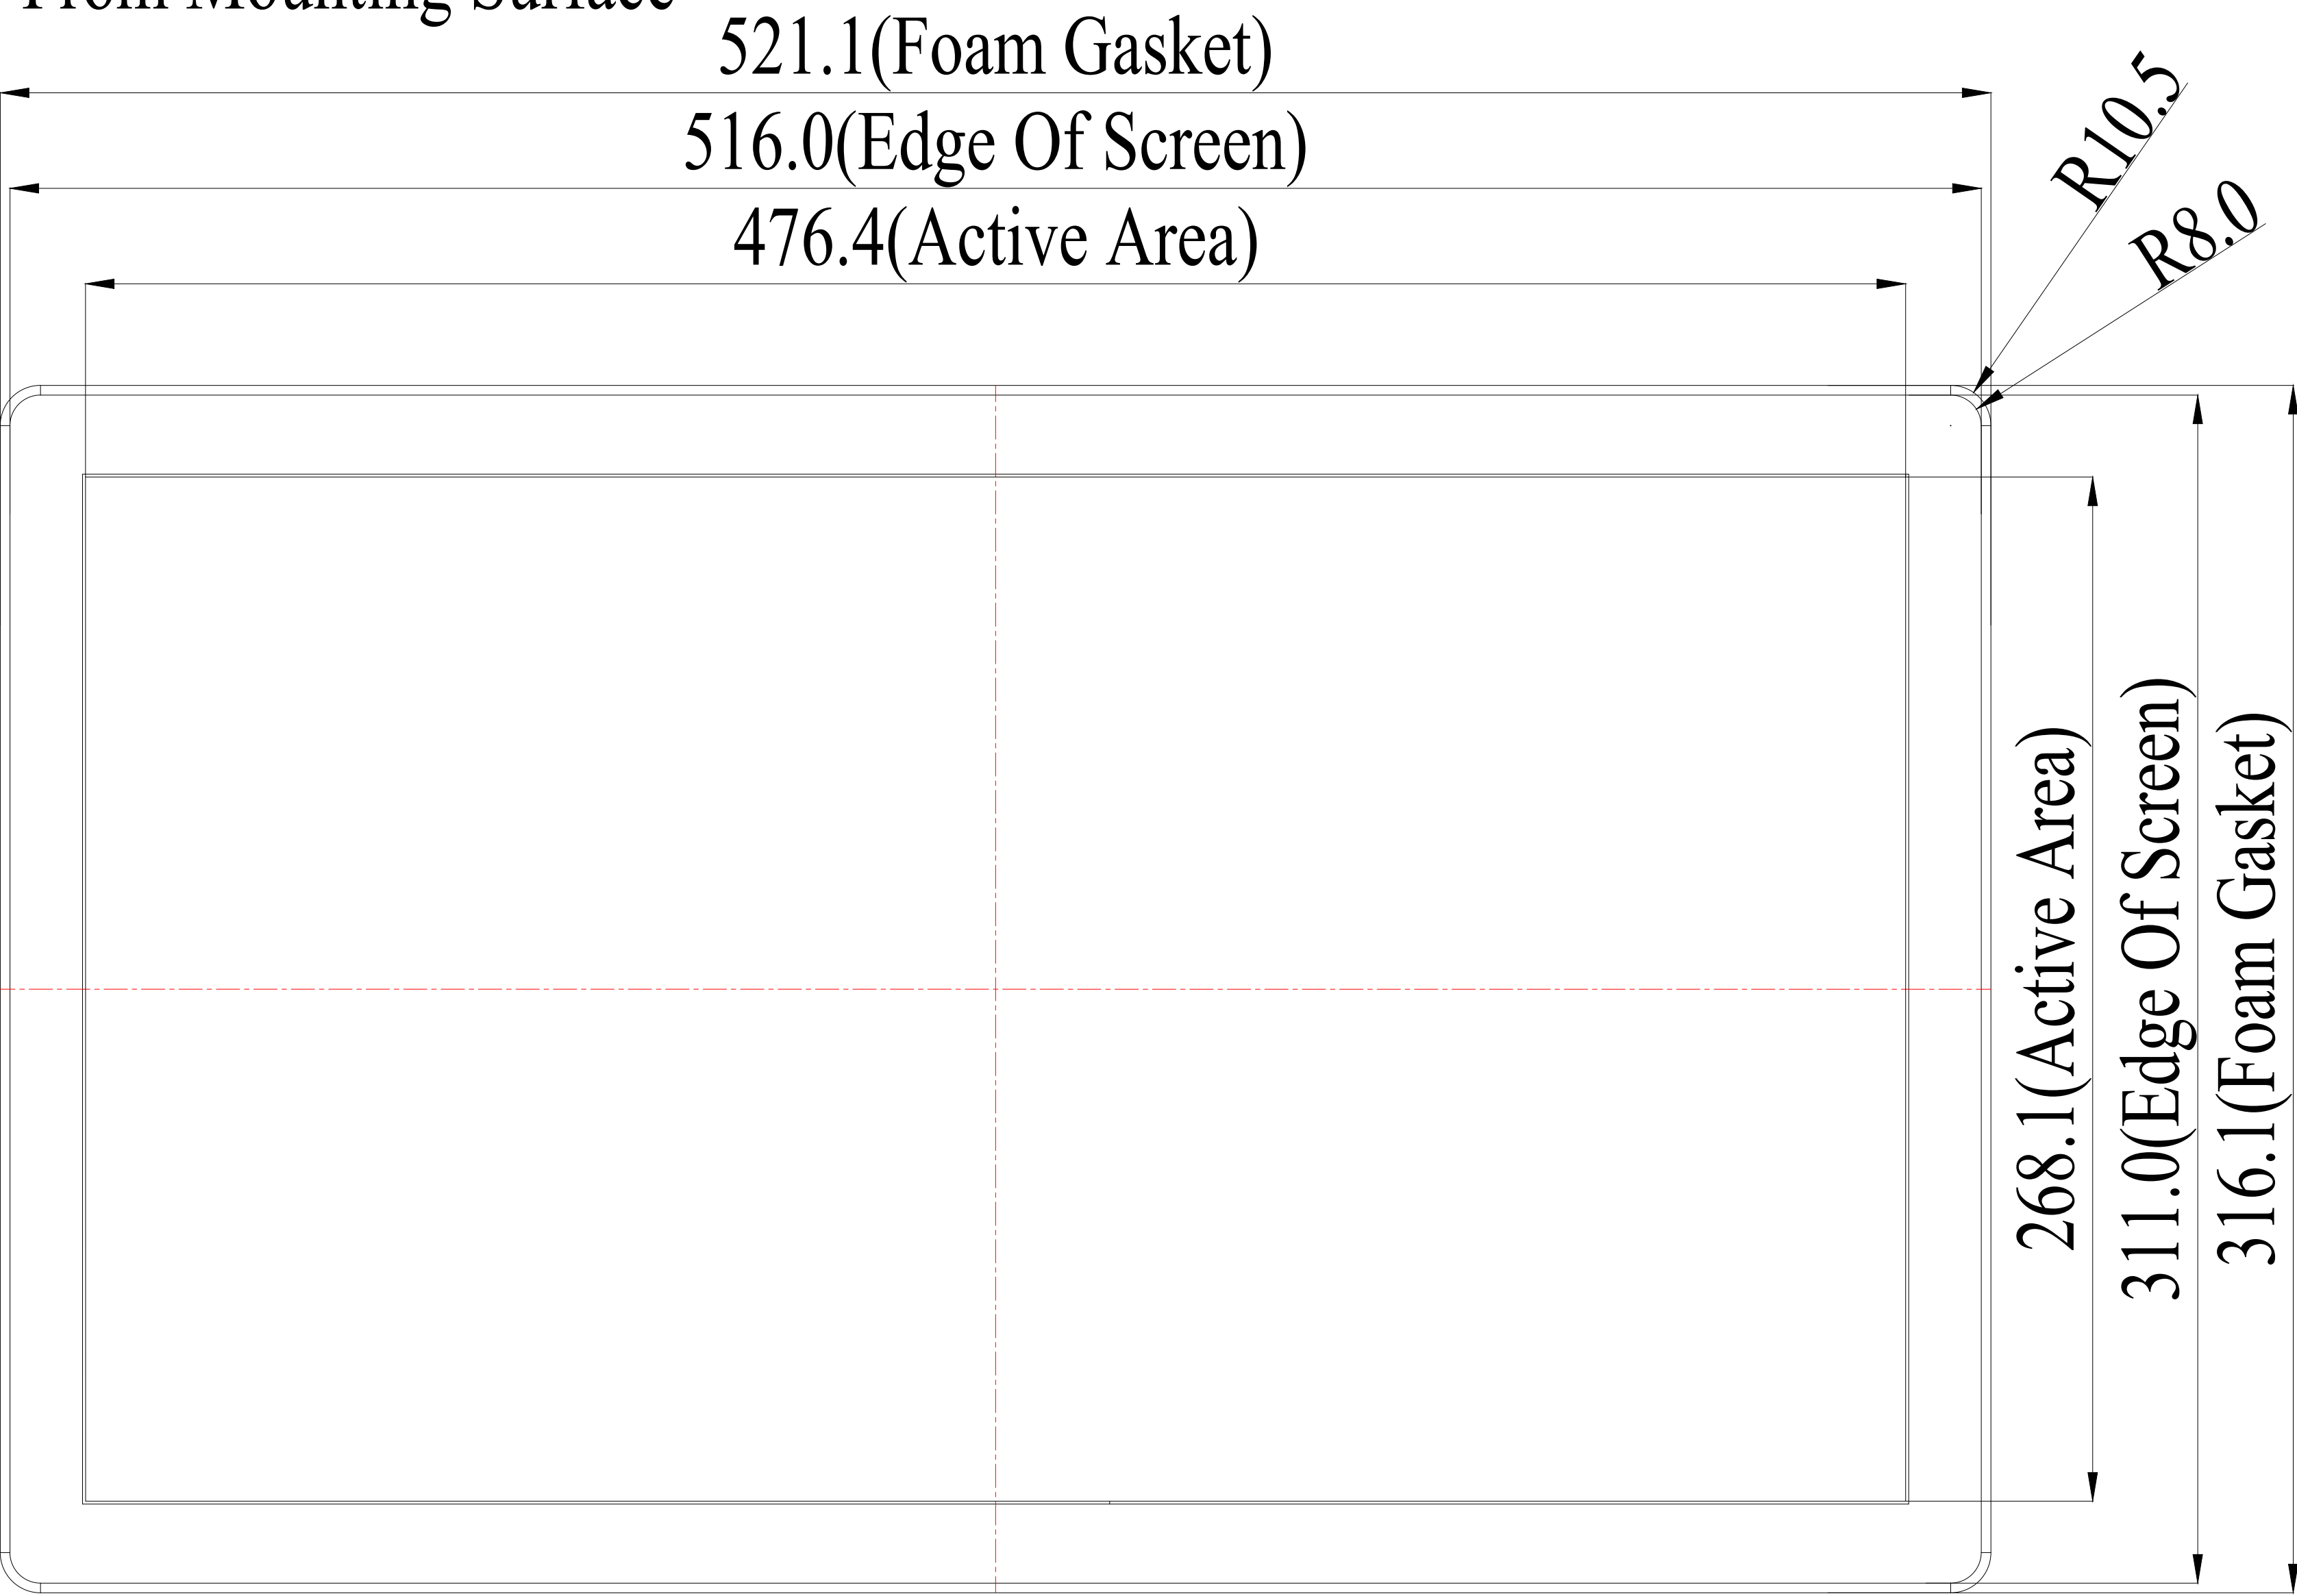


Title: RBL226-LC4000-UD2F00-1.0


Mark	Revised Contents	Signature

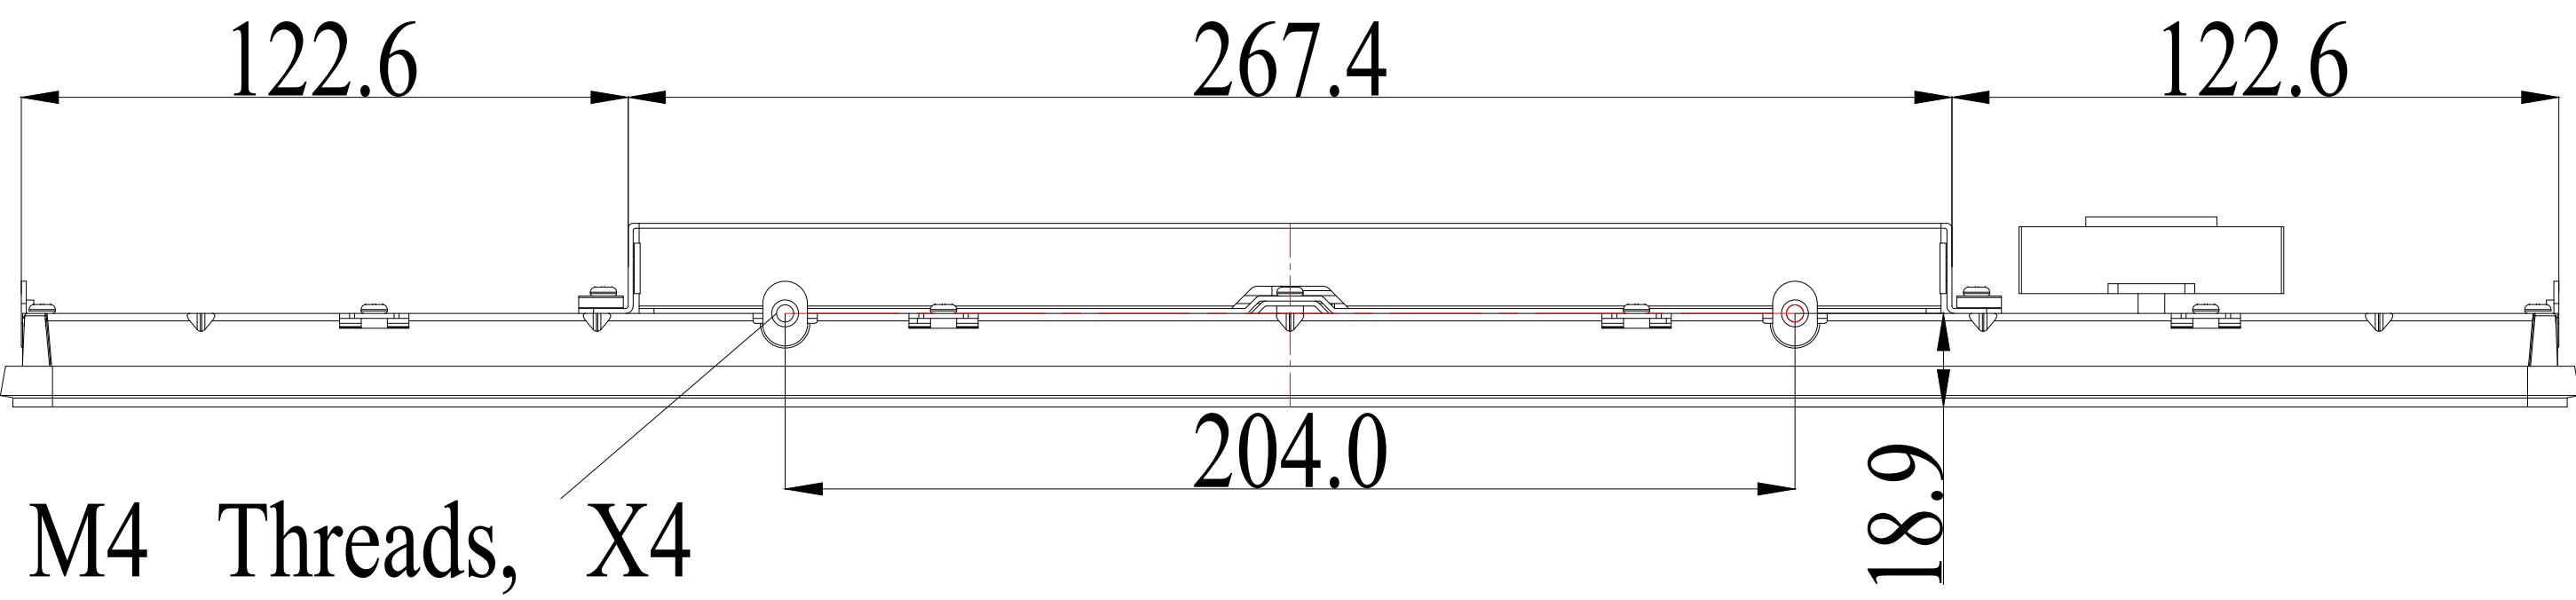

OSD (max thickness =15.5mm)

VESA:M4 Threads, X4
Max Screw Depth=6mm
From Mounting Surface


ALL DIMENSIONS ARE IN MILLIMETERS

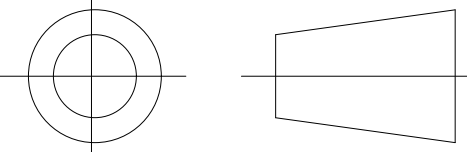GENERAL Touch		GeneralTouch Co.,Ltd.							
Specification		External Dimensions	521.1*316.1*37.1	Anti-Glare	Y ☐ N ☒	Designer:			
Unit	Date	Active Area	476.4*268.11	DustPro	Y ☐ N ☒				
mm	2020/11/19	Glass Thickness	2mm			ZhouRui			
Projection: 		Silk Print Color	Black			Checked:			
		Mounting	Vesa ☒	Bracket	☒				
Sheet 3 OF 1		Notes		WangZhengHua					
RVE: 0.1	Scale: 1:1	TOUCH TECHNOLOGY		P-CAP	☒	SAW	Appoved:		
Tolerance: +1.0mm				IR/PIT		RESISTIVE	ZhouBoLin		
				Non-Touch					



Title: RBL226-LC4000-UD2F00-1.0

Mark	Revised Contents	Signature


Mounting Bracket Adjustment
Range 12.5mm (X4 Places)

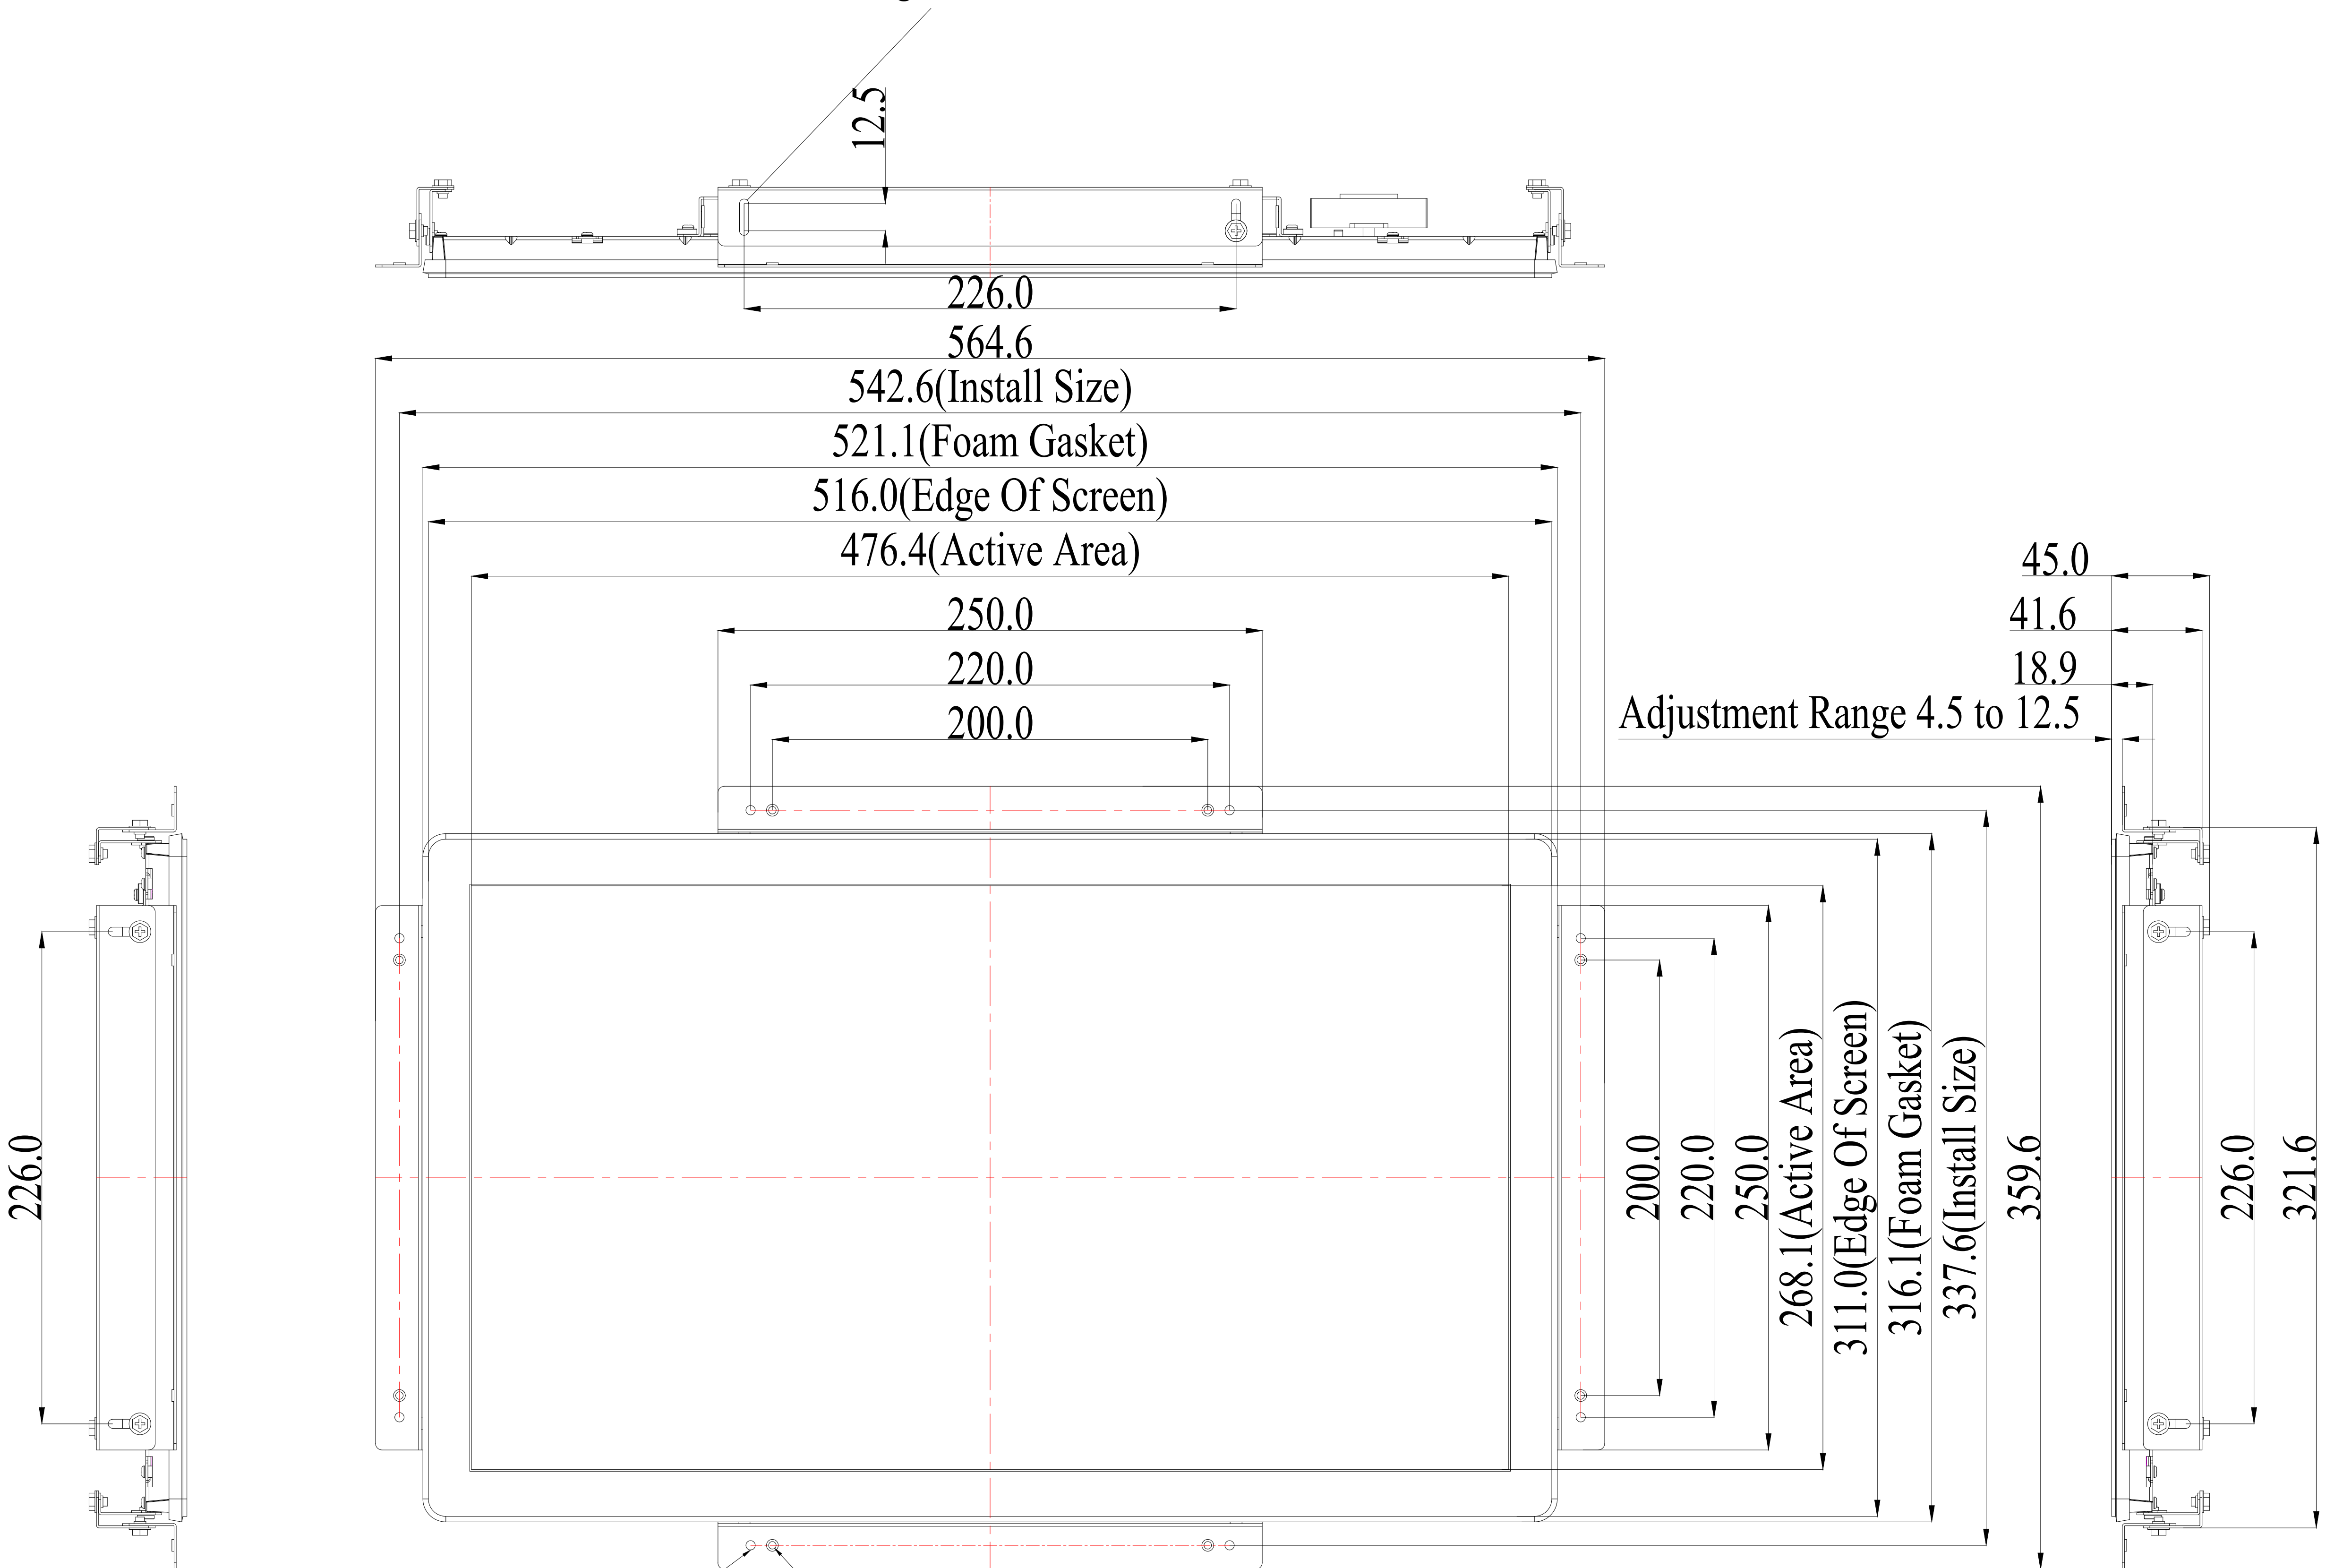


Ø4.3Hole X8 M4 THREAD X8

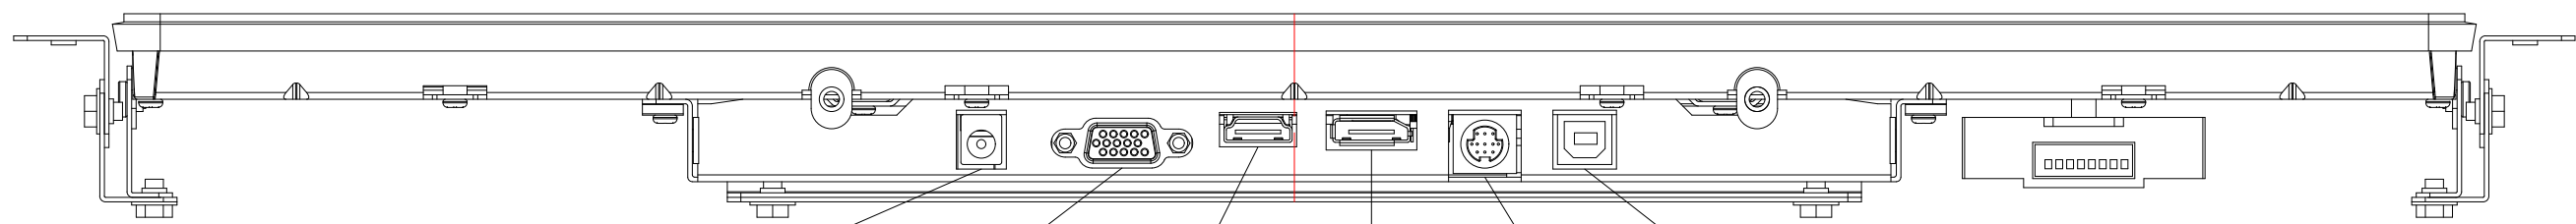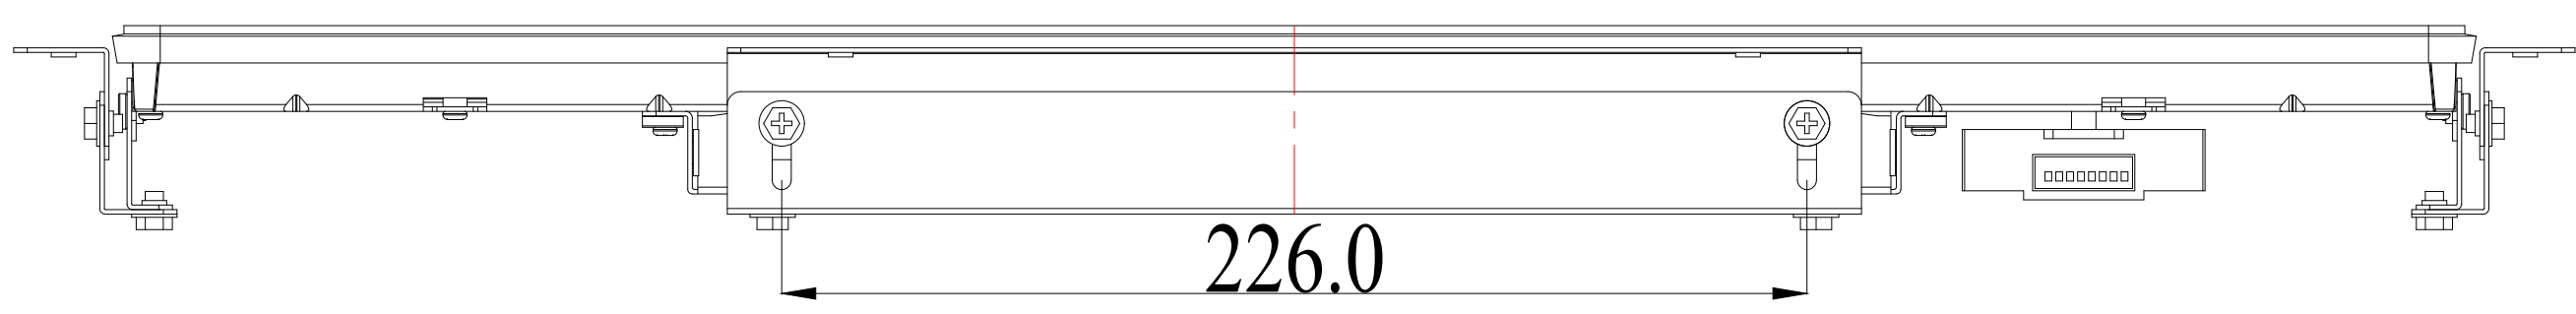

DC/12V POWER VGA HDMI DP OSD USB

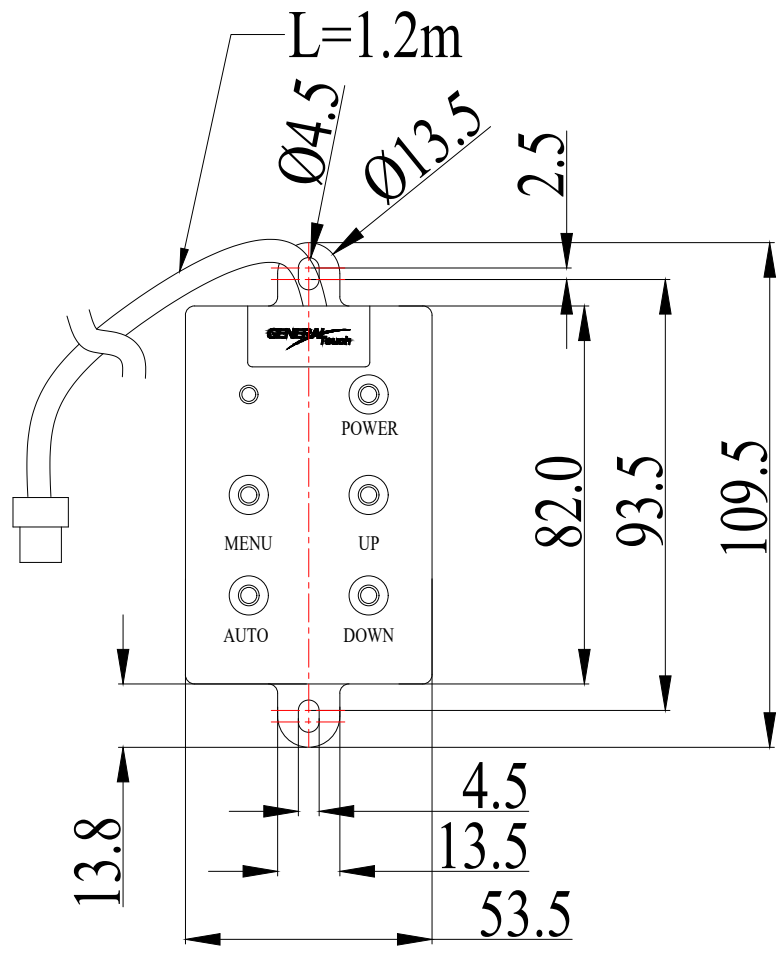


OSD (max thickness =15.5mm)






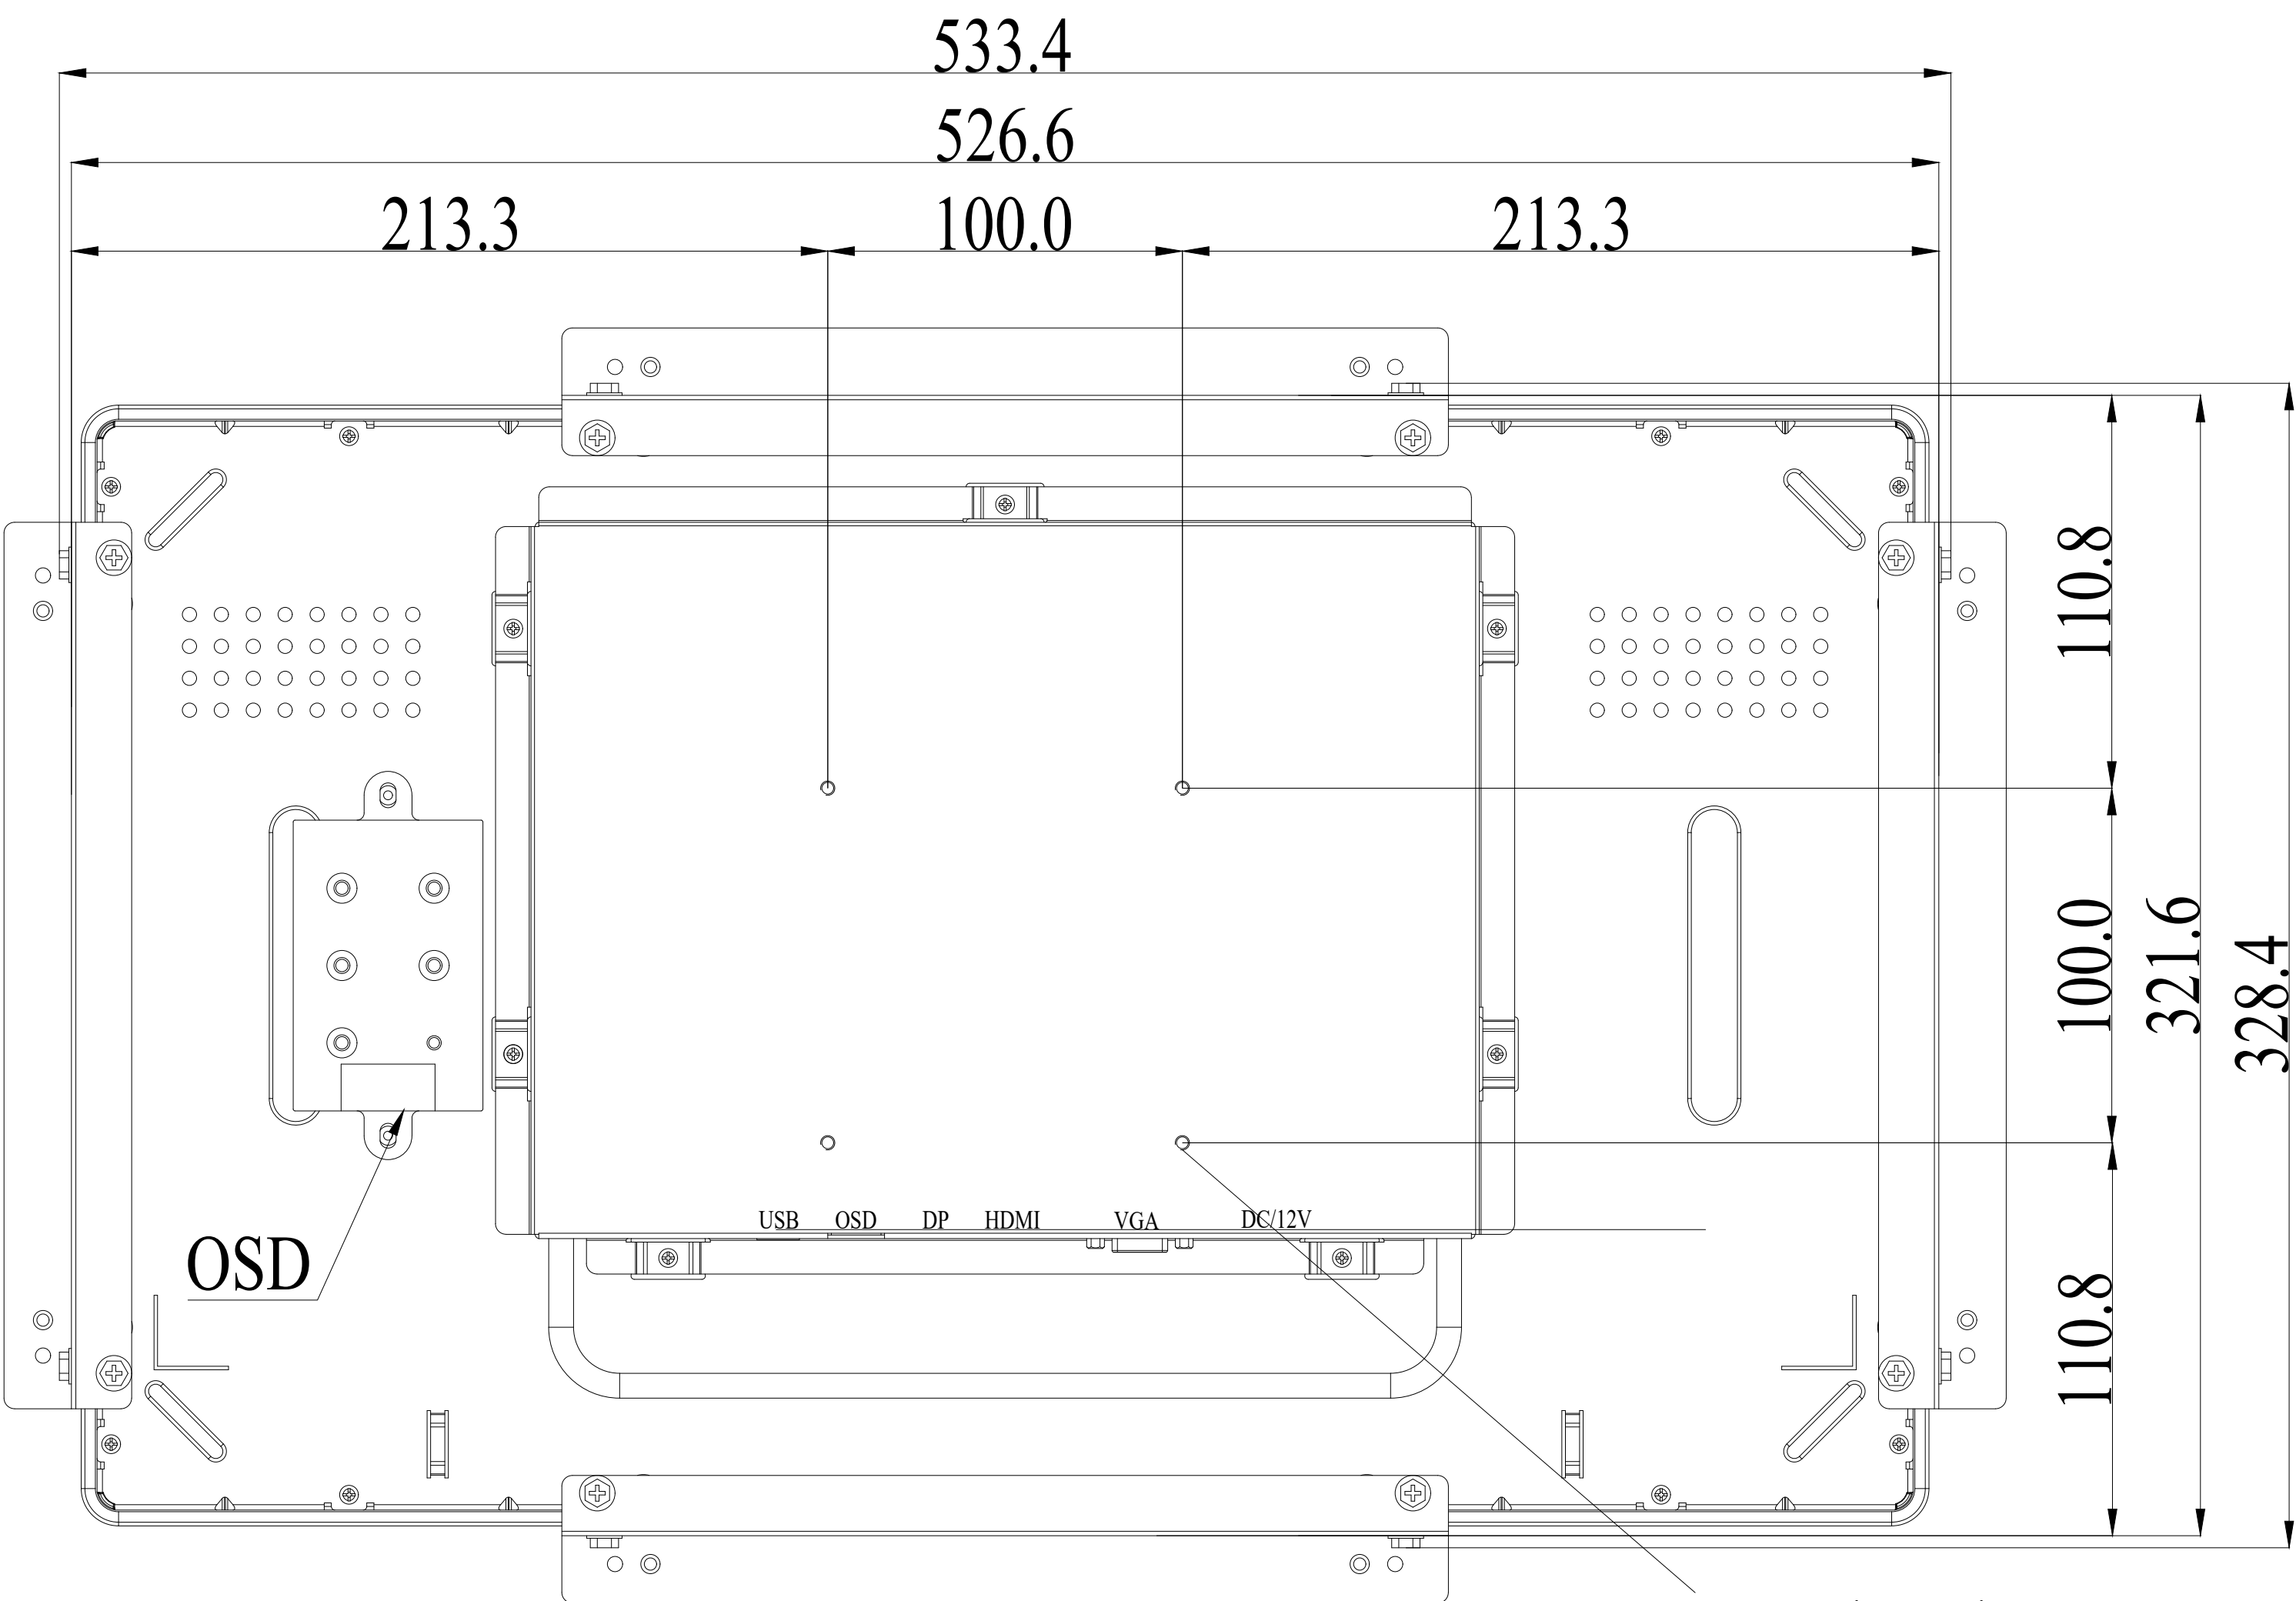


VESA:M4 Threads, X4
Max Screw Depth=6mm
From Mounting Surface

ALL DIMENSIONS ARE IN MILLIMETERS

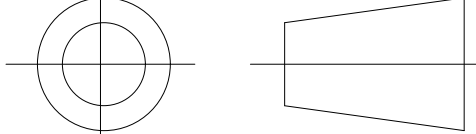
GENERAL Touch		GeneralTouch Co.,Ltd.						
Specification		External Dimensions	564.6*359.6*45		Anti-Glare	Y ☐ N ☒	Designer:	
Unit	Date	Active Area	476.4*268.11		DustPro	Y ☐ N ☒		
mm	2020/11/19	Glass Thickness	2mm				ZhouRui	
Projection: 		Silk Print Color	Black				Checked:	
		Mounting	Vesa ☒		Bracket ☒			
SHEET 3 OF 2		NOTES					WangZhengHua	
RVE: 0.1	SCALE: 1:1	TOUCH TECHNOLOGY		P-CAP	☒	SAW	Approved:	
Tolerance: +1.0mm				IR/PIT		RESISTIVE		ZhouBoLin
				Non-Touch				

Title: RBL226-LC4000-UD2F00-1.0		
Mark	Revised Contents	Signature
		

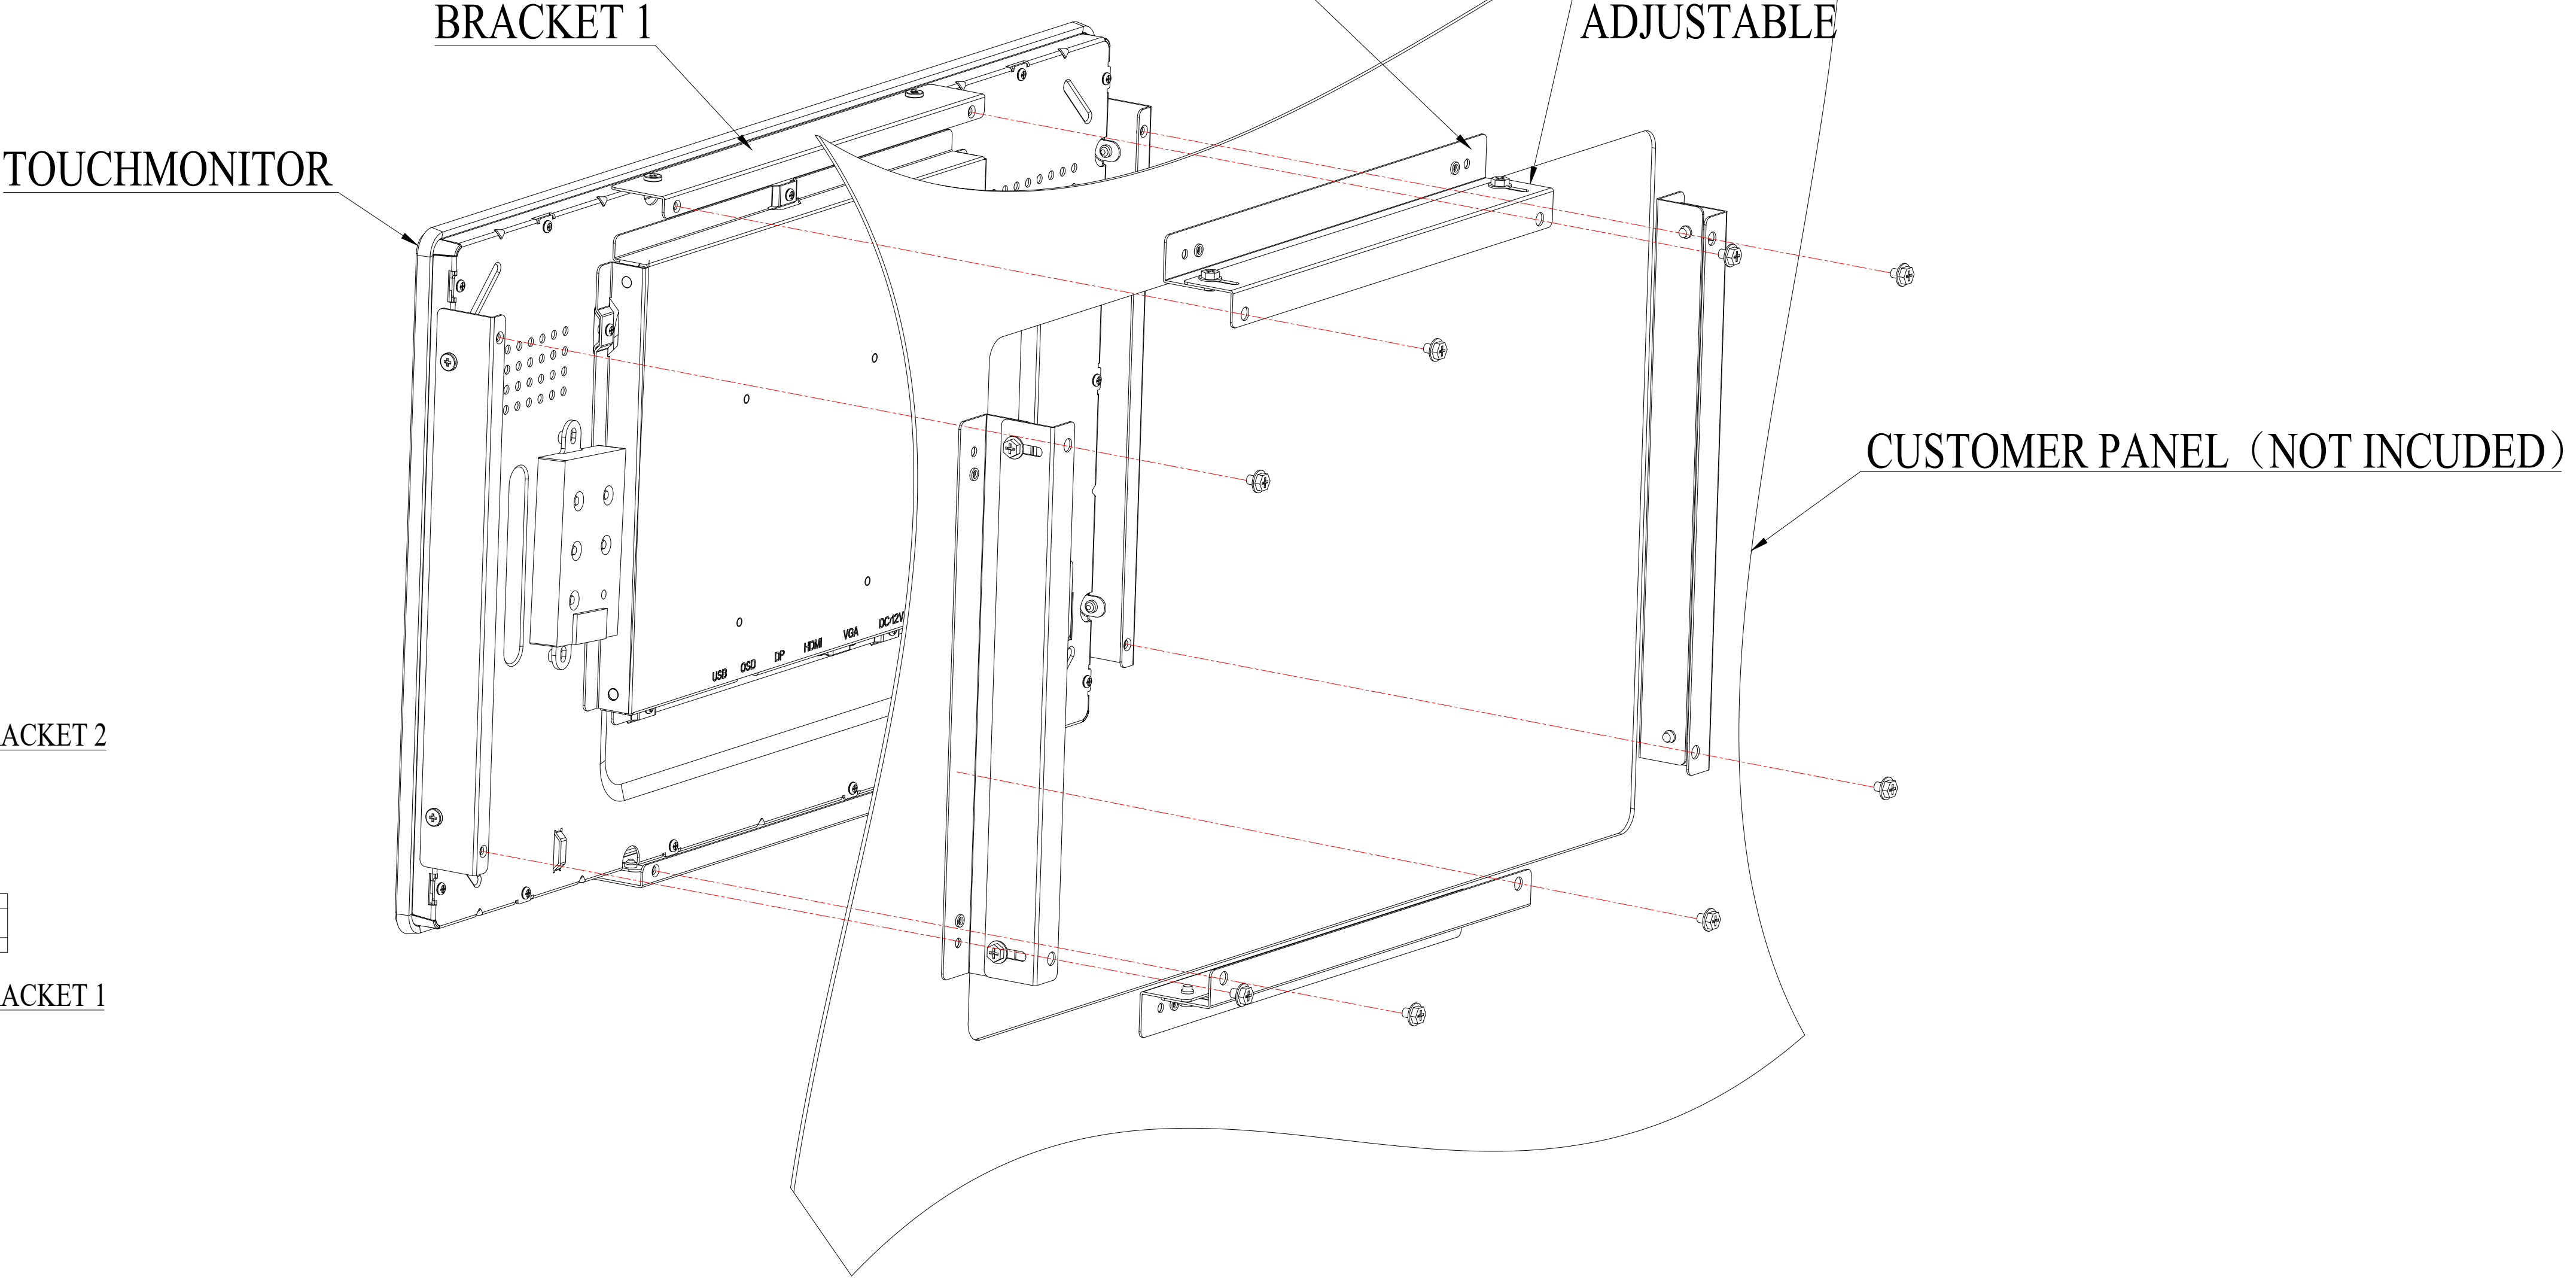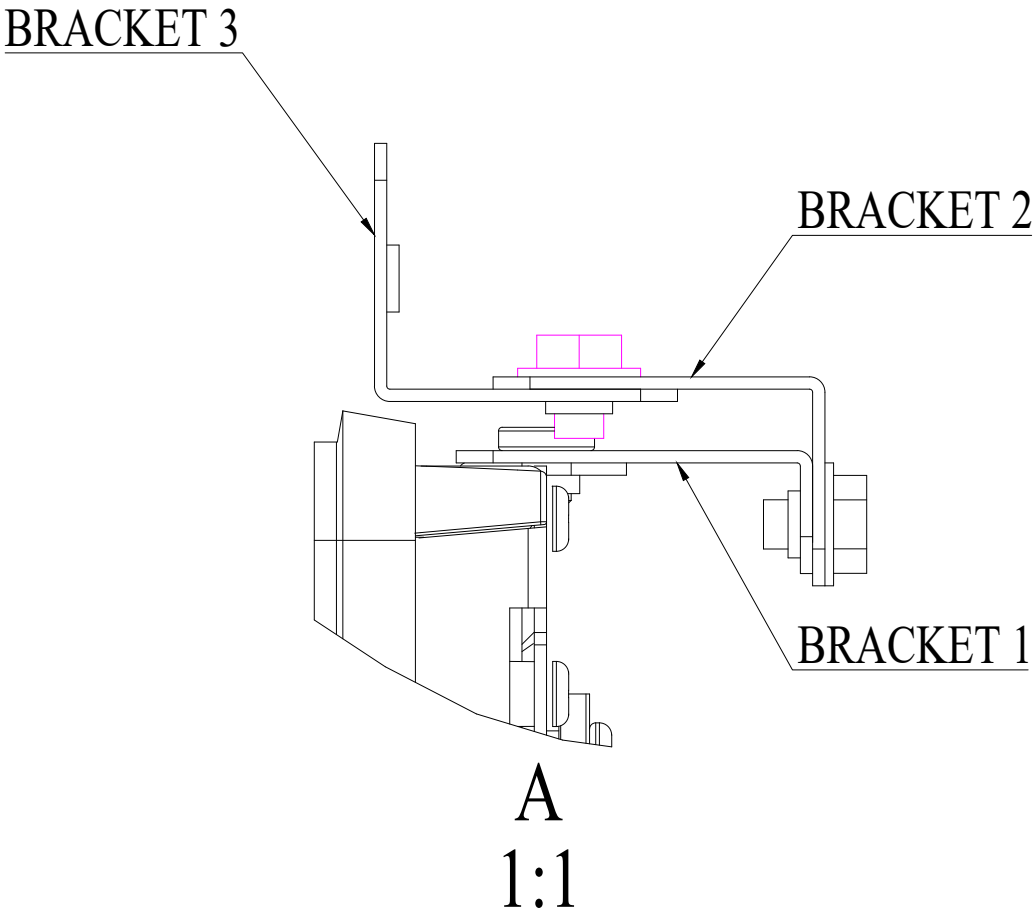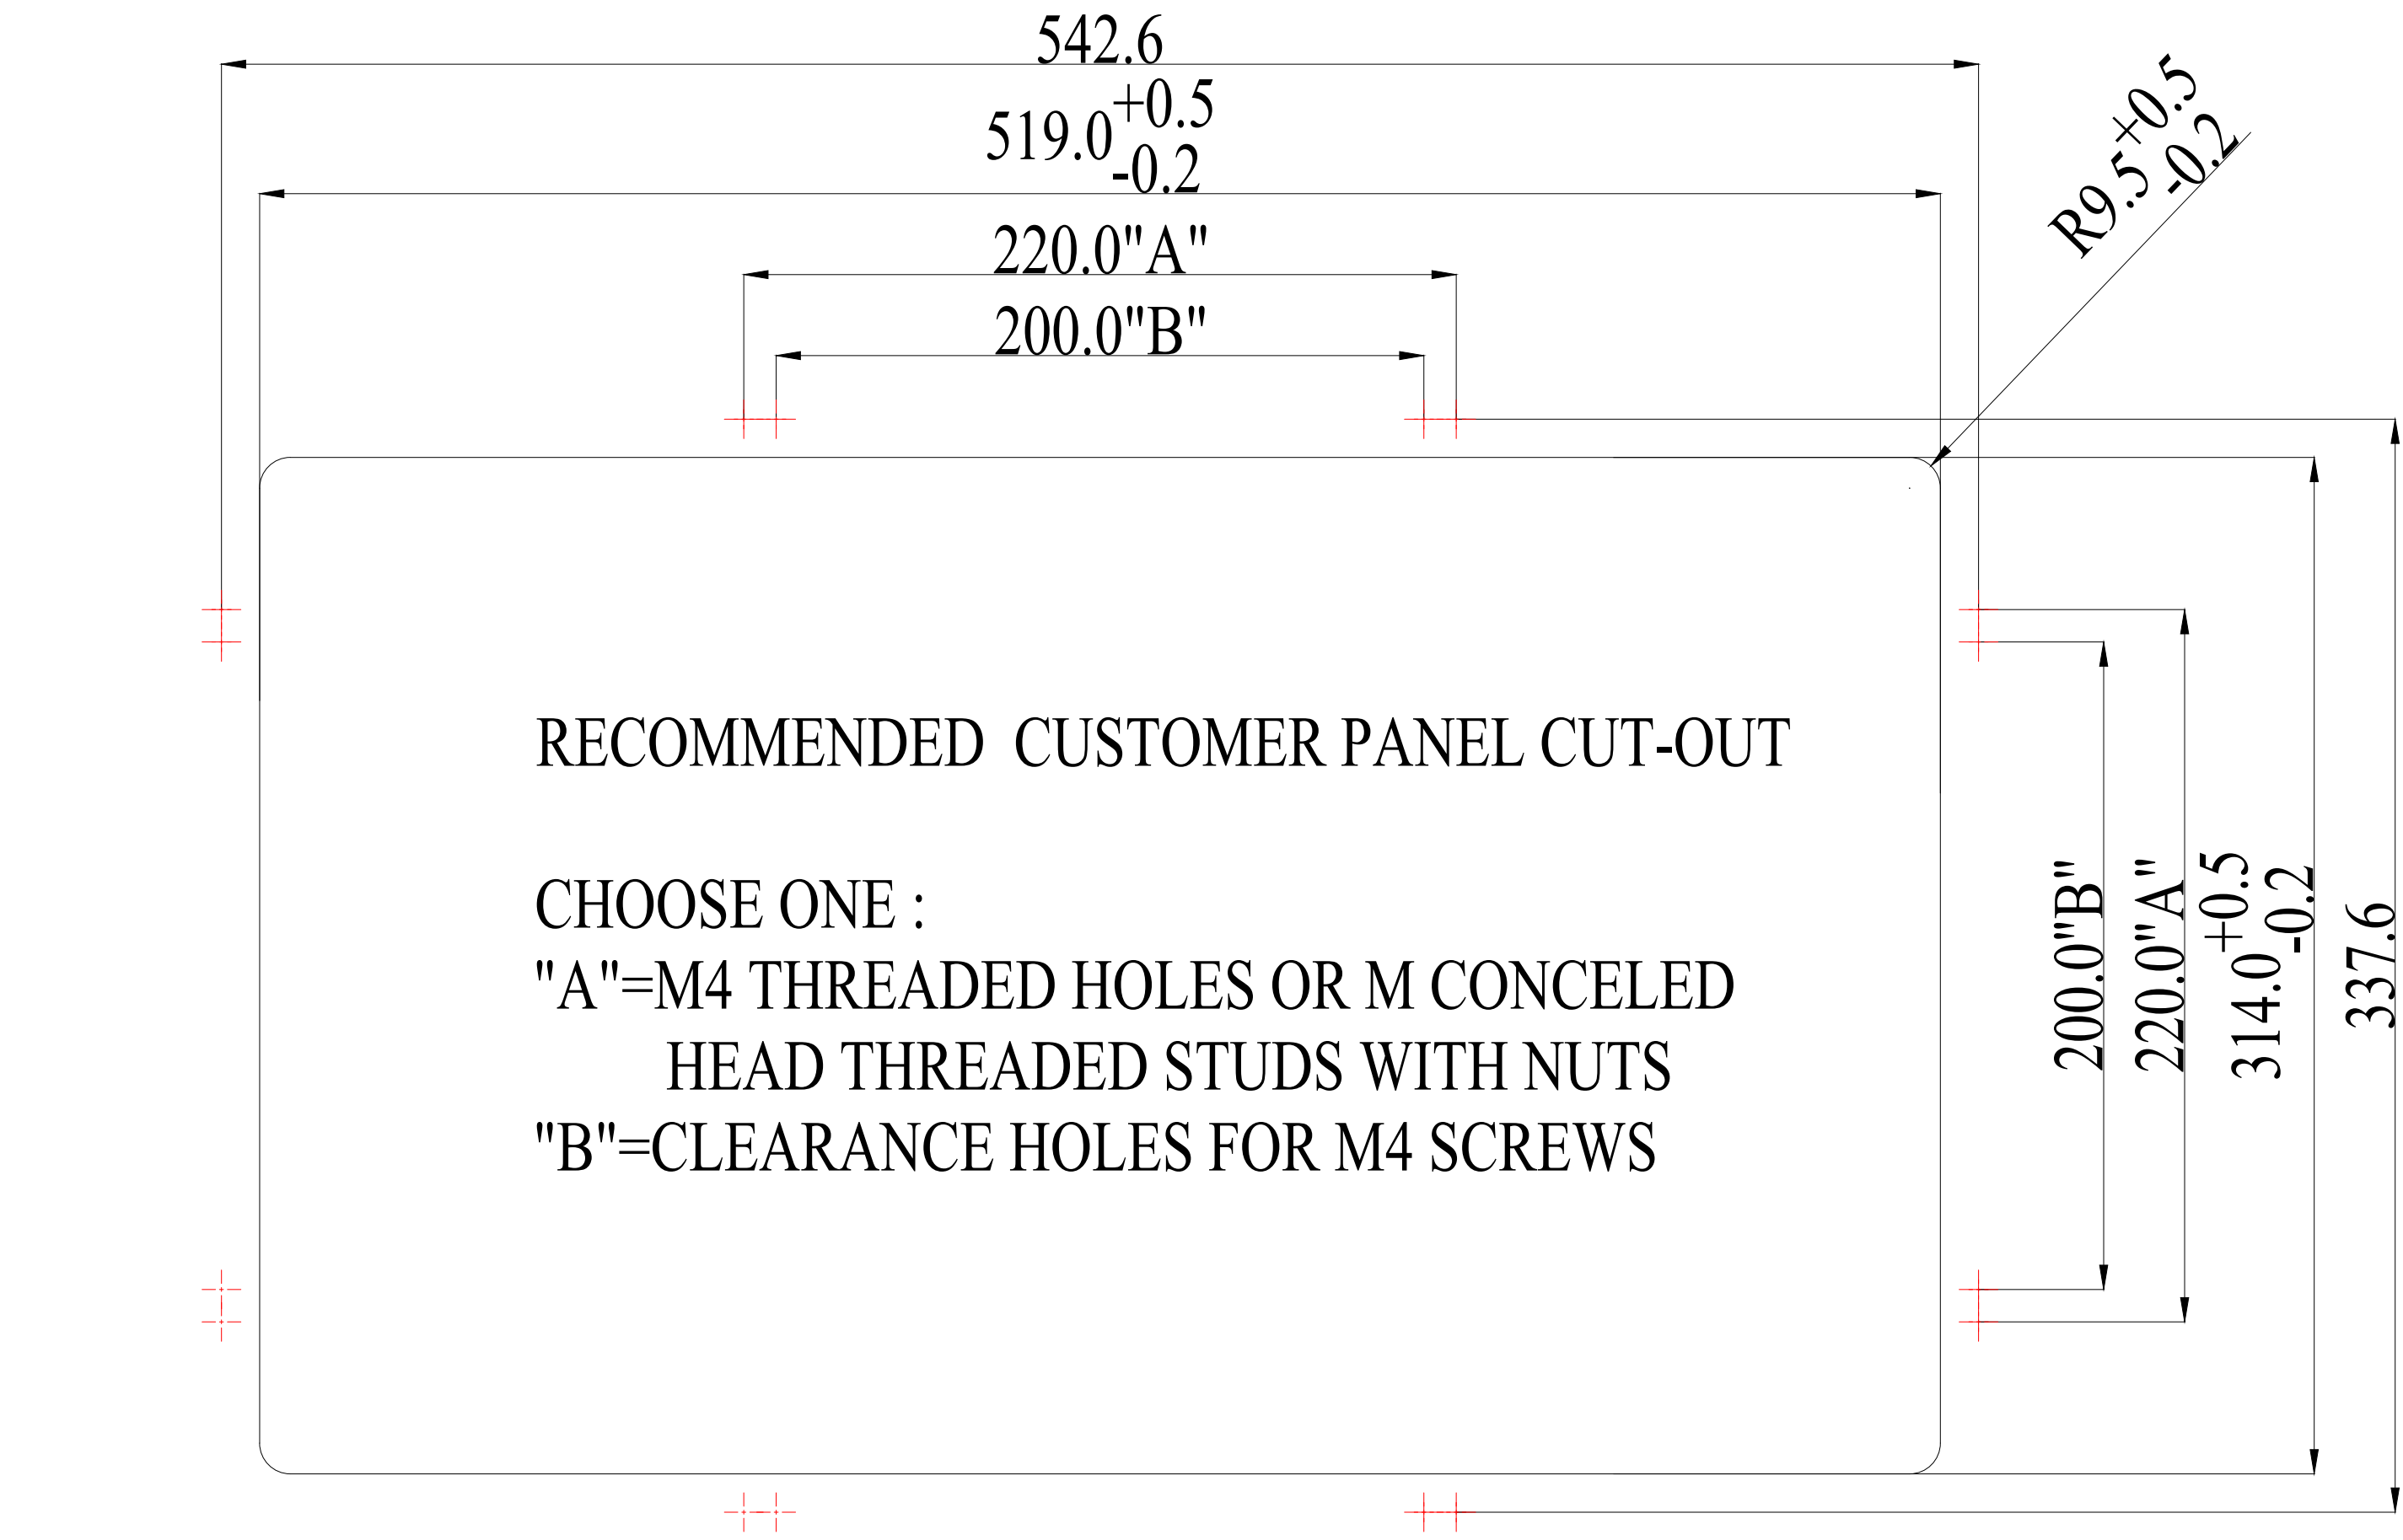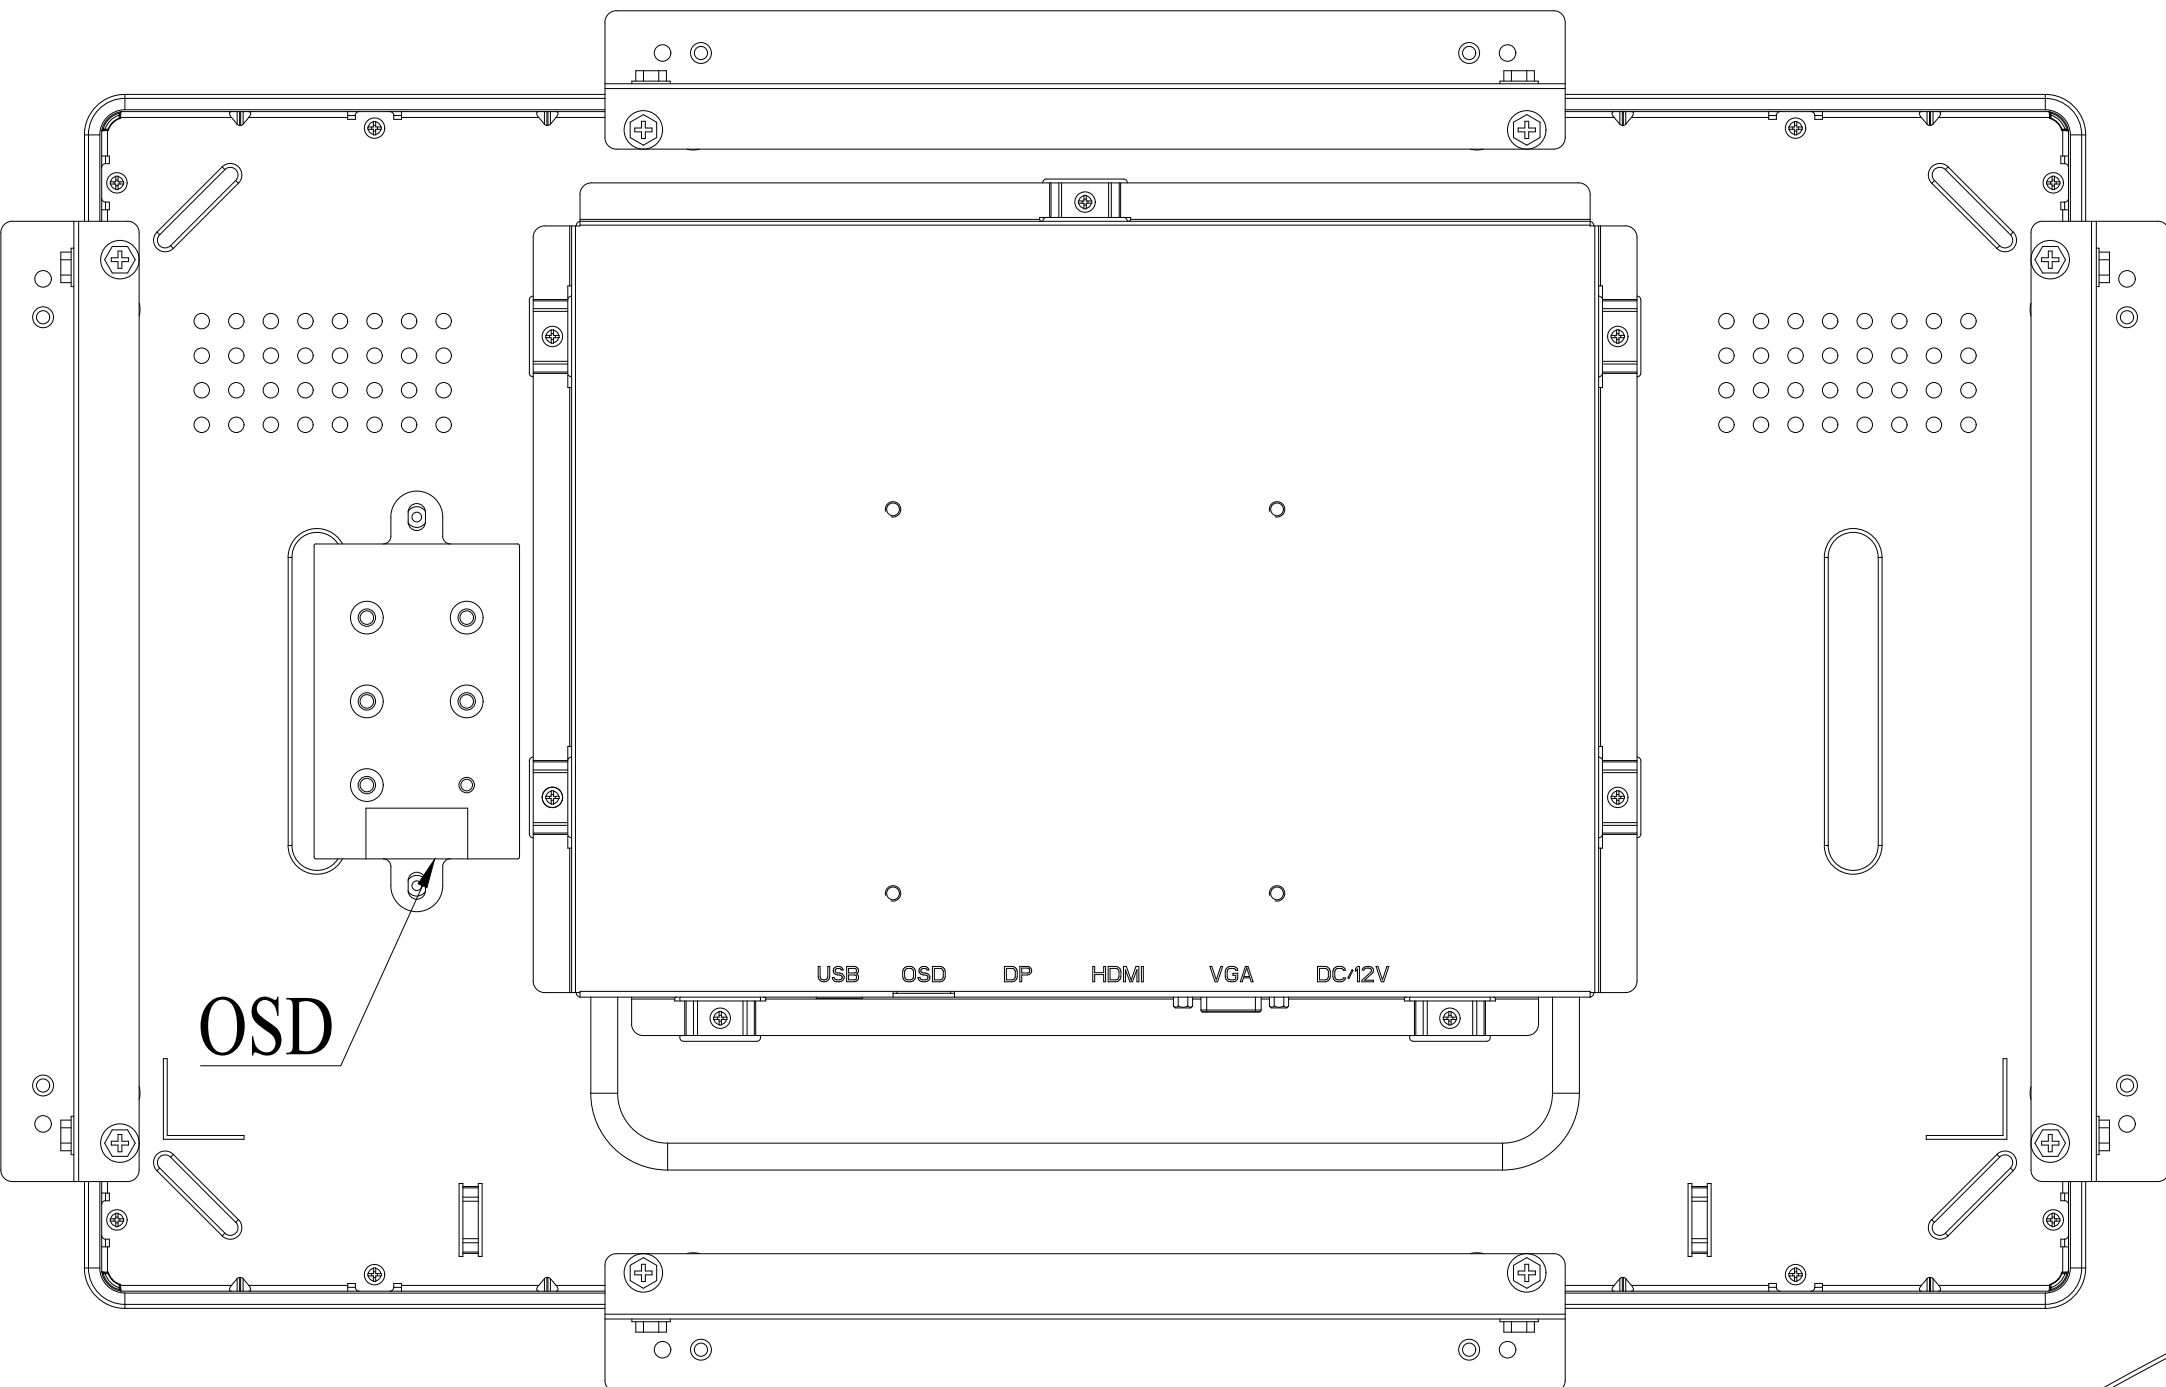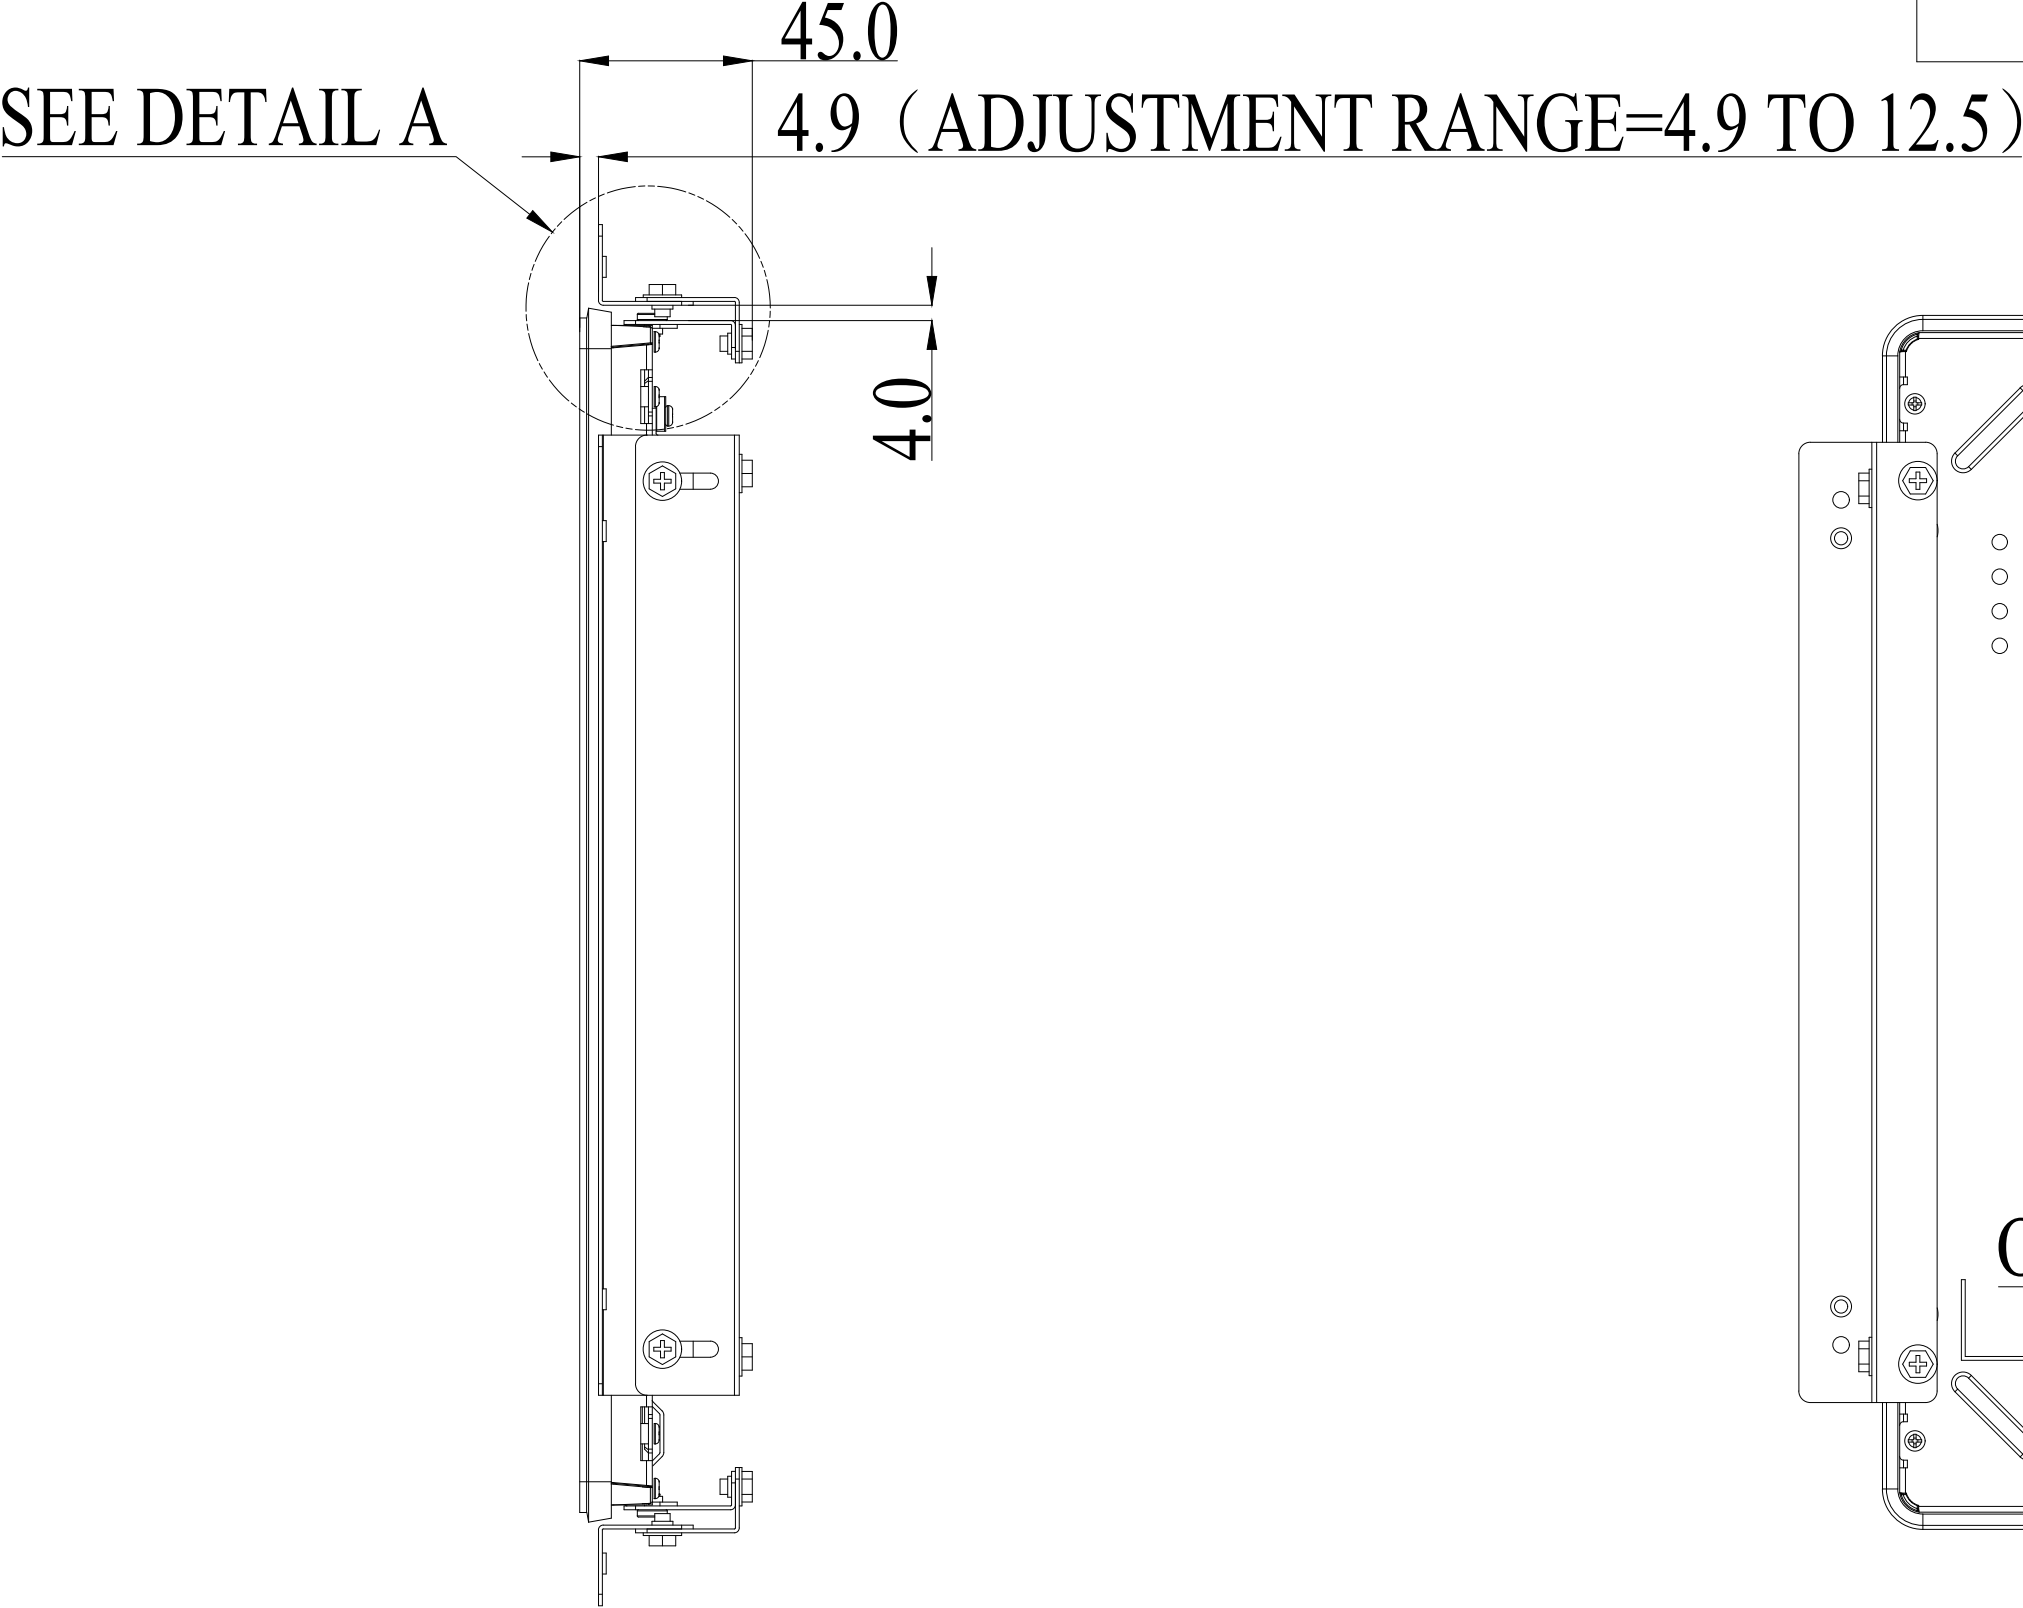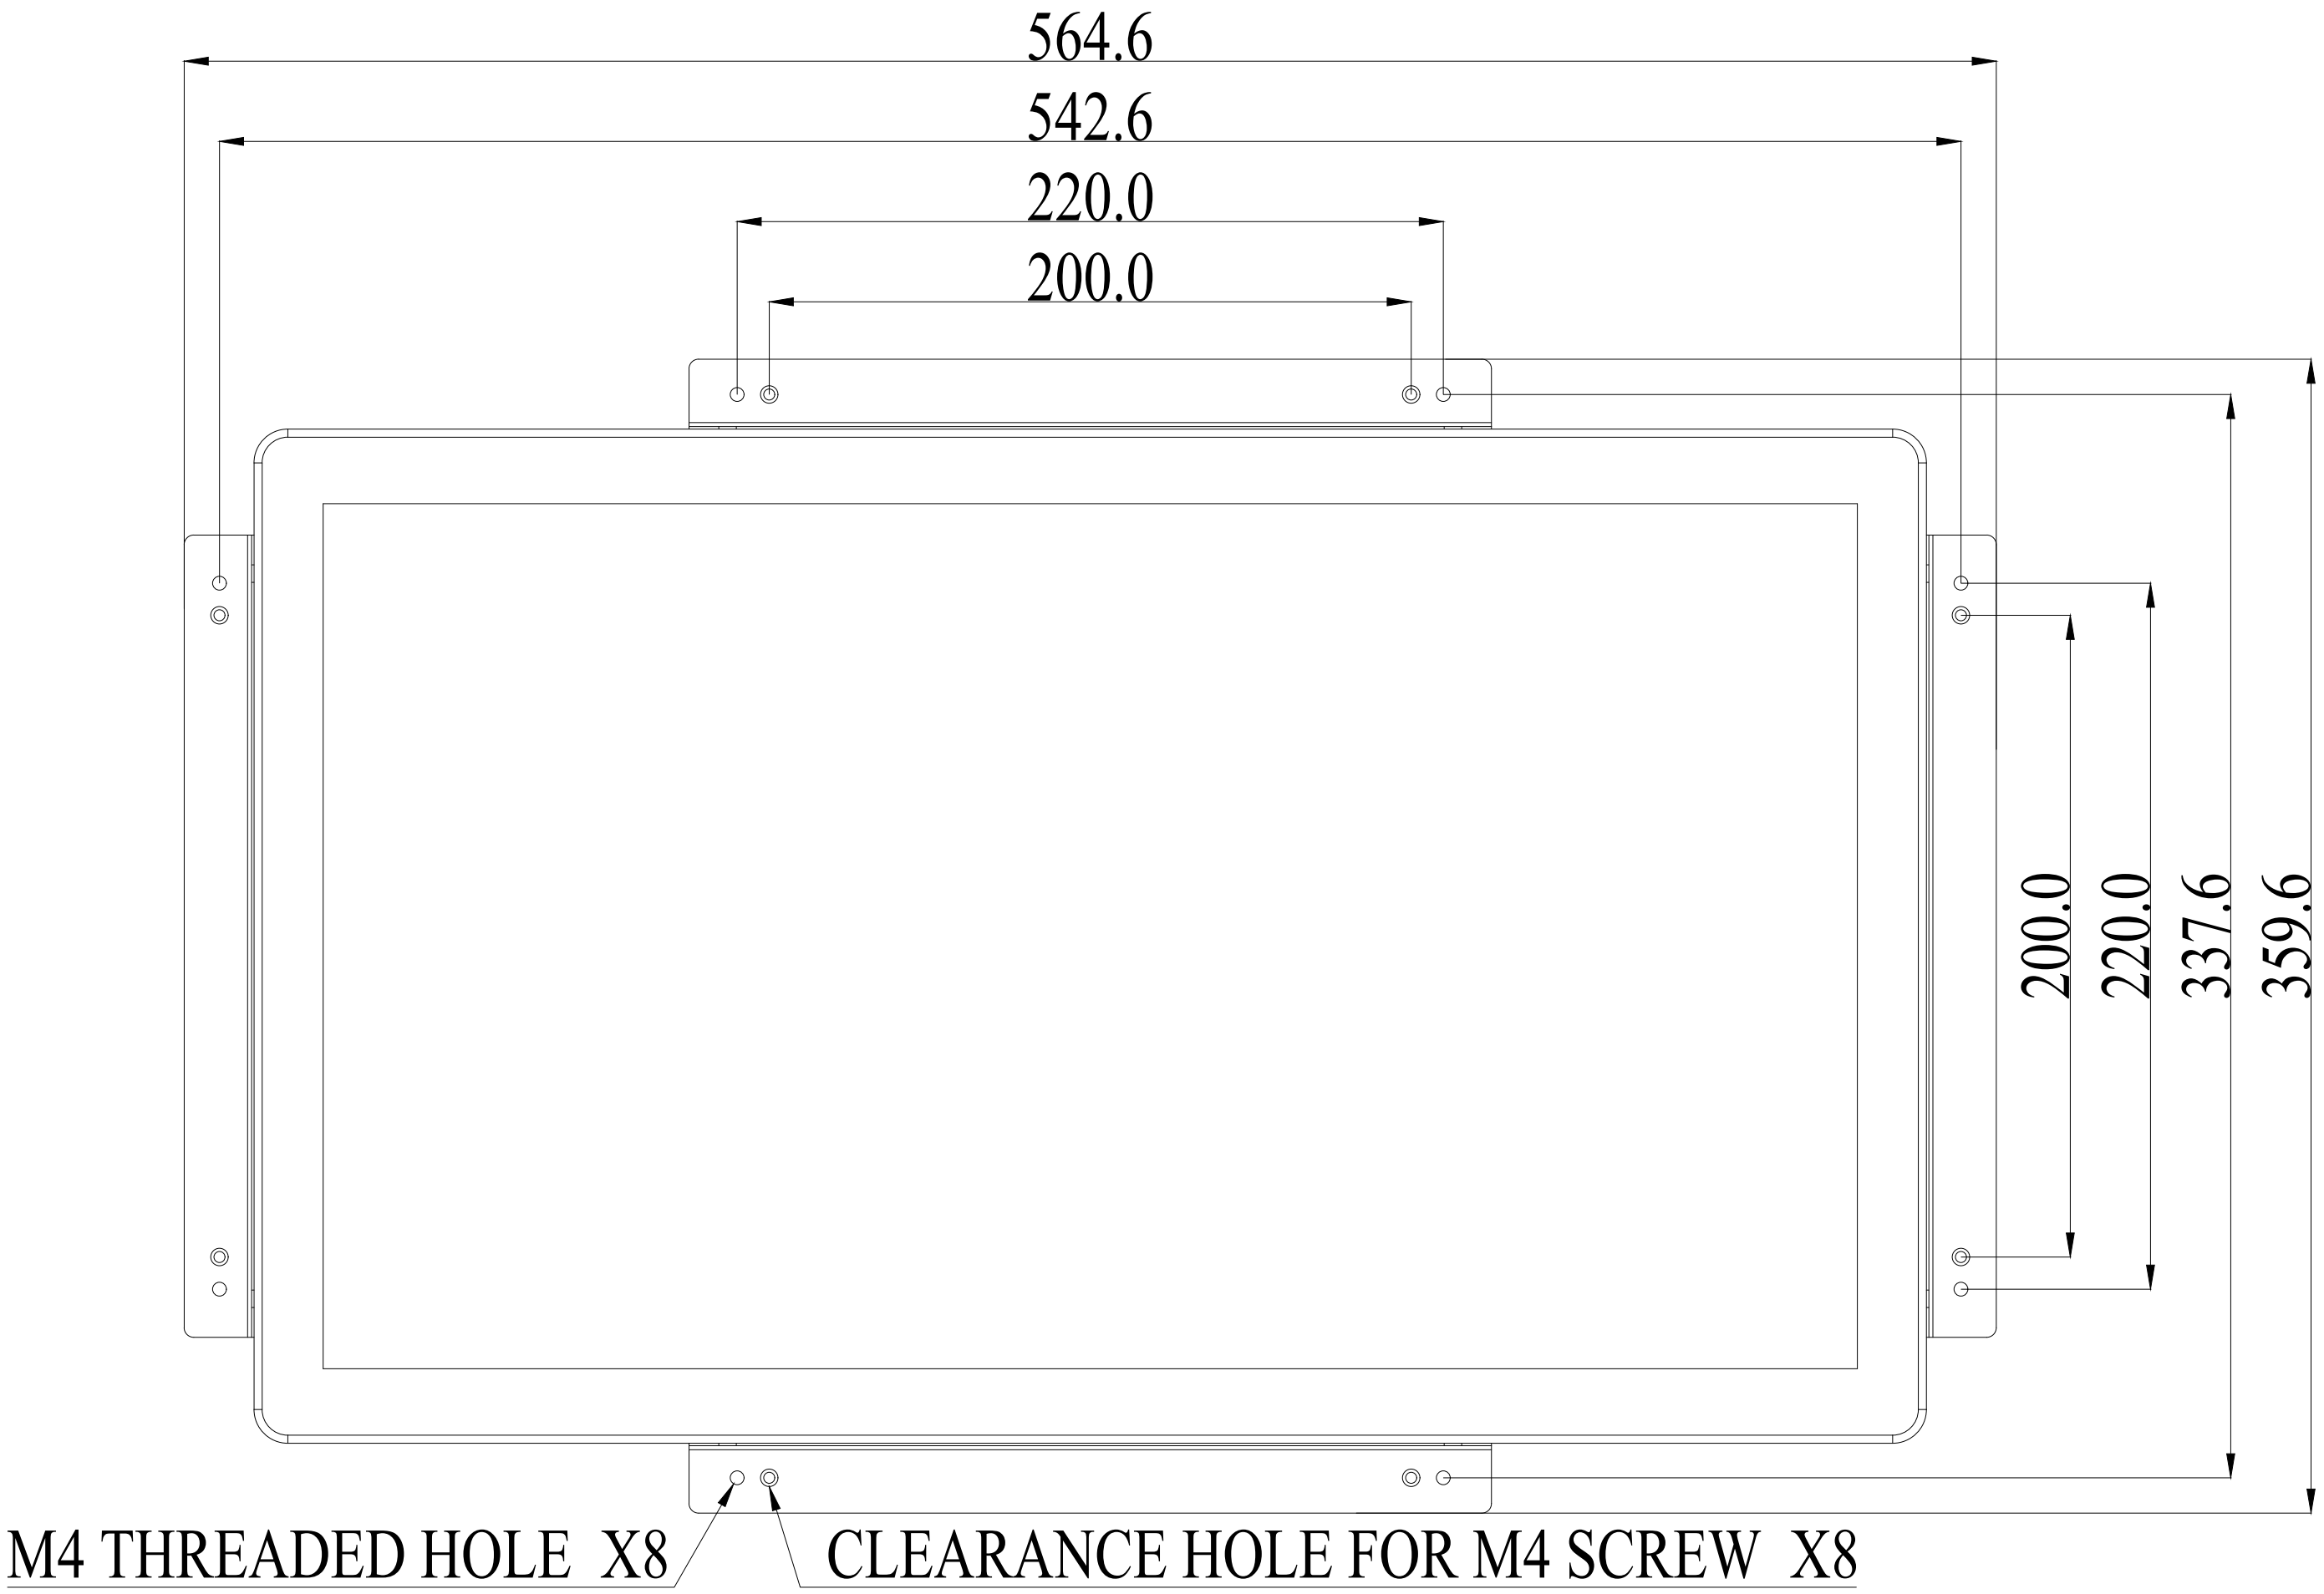

- INSTALLATION NOTES:
- 1.ATTACH BRACKET 1 TO TOUCHMONITOR(ALL FOUR SIDES) WITH LOW PROFILE SCREWS (INCLUDED)
 - 2.ATTACH BRACKET 3 TO CUSTOMER PANEL PRE CUT-OUT DRAWING (ALL FOR SIDES)
 - 3.ATTACH BRACKET 2 TO BRACKET 3 ON ALL FOUR SIDES WITH M HEX HEAD SCREWS (INCLUDED)
 - 4.ADJUST DEPTH OF BRACKET 2 SO MONITOR IS FLUSH WITH CUSTOMER PANEL
 - 5.PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING
 - 6.SECURE TOUCHMONITOR TO BRACKET 2 FROM BEHIND WITH M4 HEX HEAD SCEWS (INCLUDED)

ALL DIMENSIONS ARE IN MILLIMETERS

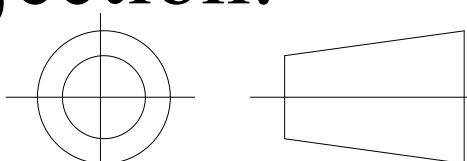GENERAL Touch		GeneralTouch Co.,Ltd.					
Specification		External Dimensions	564.6*359.6*45	Anti-Glare	Y ☐ N ☒	Designer:	
Unit	Date	Active Area	476.4*268.11	DustPro	Y ☐ N ☒		
mm	2020/11/19	Glass Thickness	2mm			ZhouRui	
Projection: 		Silk Print Color	Black			Checked:	
		Mounting	Vesa ☒	Bracket	☒		
Sheet 3 OF 3		Notes		WangZhengHua			
VER: 0.1	Scale: 1:1	TOUCH TECHNOLOGY		P-CAP	☒	SAW	Approved:
Tolerance: +1.0mm				IR/PIT		RESISTIVE	
				Non-Touch			