

GT RTL326 32" Rear Mount Touchmonitor




GT RTL326 Commercial-grade 32" rear mount touchmonitor delivers a better visual experience and more realistic and accurate touch experience.

With the unique design of widescreen and narrow border, RTL326 allows more content on the screen than standard with an even smaller and artistic outline. GT RTL326 features multiple interfaces and flexible mounting, ease of connection to various devices, and installation into the cabinet. It's an ideal touch solution for retail, gaming, kiosk, self-service, finance, transport, conference, education, and healthcare.

Features & Benefits

- Accurate PCAP 10-point multitouch technology
- Edge-to-edge true-flat design with low maintenance
- Flexible mounting, Support VESA and all four-side bracket
- HDMI,VGA,DP interface
- Anti-scratches
- Easy installation to the cabinet
- 3 Years Warranty

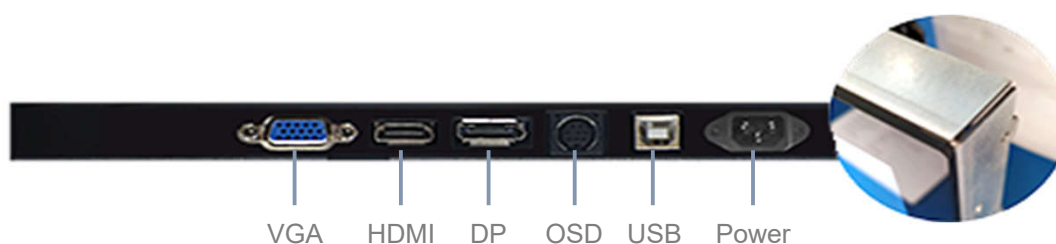

Applications

- | | | | | |
|----------|---------------|------------------|-----------|----------------|
| ■ Retail | ■ Corporation | ■ Medical | ■ Banking | ■ Self-service |
| ■ Gaming | ■ Kiosk | ■ Transportation | | |

SPECIFICATIONS

Name	32" Rear Mount Touchmonitor
Model	RTL326
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD with LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	698.4×392.86mm
Native Resolution	1920×1080@60Hz
Response Time (Typ.)	8ms
Display Colors	16.7million
Luminance (Typ.)	500nits; with PCAP 415nits
Contrast Ratio (Typ.)	3000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	Projected Capacitive (PCAP)
Surface Treatment	Chemically Strengthened
	Optional: Anti-glare
Active Area(W x H)	698.4×392.86±0.3mm
Thickness(Total)	4.3±0.3mm
Light Transmission	≥83%
Response Time	10ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Case/Bezel Color	Gray
Mounting Options	VESA: 400×200 mm; Rear Mounting; Side Mounting
Outline Dimensions (W×H×D)	746.6mm × 452.0mm× 57.70mm
Power Supply	Input Voltage Range: 100-240V AC, 50-60 Hz
On Screen Display (OSD)	Control (External): Power, Auto, Up, Down, Menu
Power Consumption	MAX: 60W
Speaker	NA
Webcam	NA

Operating Altitude	≤3000m
Temperature Range	Operating: 0°C to 50°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	VGA, HDMI, DP, USB (Type B), Mini Din(External OSD)
Accessories	Cables: VGA × 1, USB × 1, 1.5m Length; Bracket × 4; OSD Remote
Carton Box Dimensions	910mm (L) × 220mm (W) × 630mm (H)
Weight	Net: 14.5kg Gross: 21.5kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE , FCC,
Warranty	3 years

Ordering Information

Model	Part Number	Description
RTL326-RPCZ05-UHPDA	110302667R	32", 16:9, 500nits, P-Cap, USB, VGA & HDMI & DP, Gray

Contact sales for other options

Optional Accessories

Model	Part Number	Description
Power Cord	130300338R	UK
	130300339R	EU 1500mm
	130300340R	US
HDMI Cord	130300881R	1500mm
DP Cord	130300932R	1500mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>