

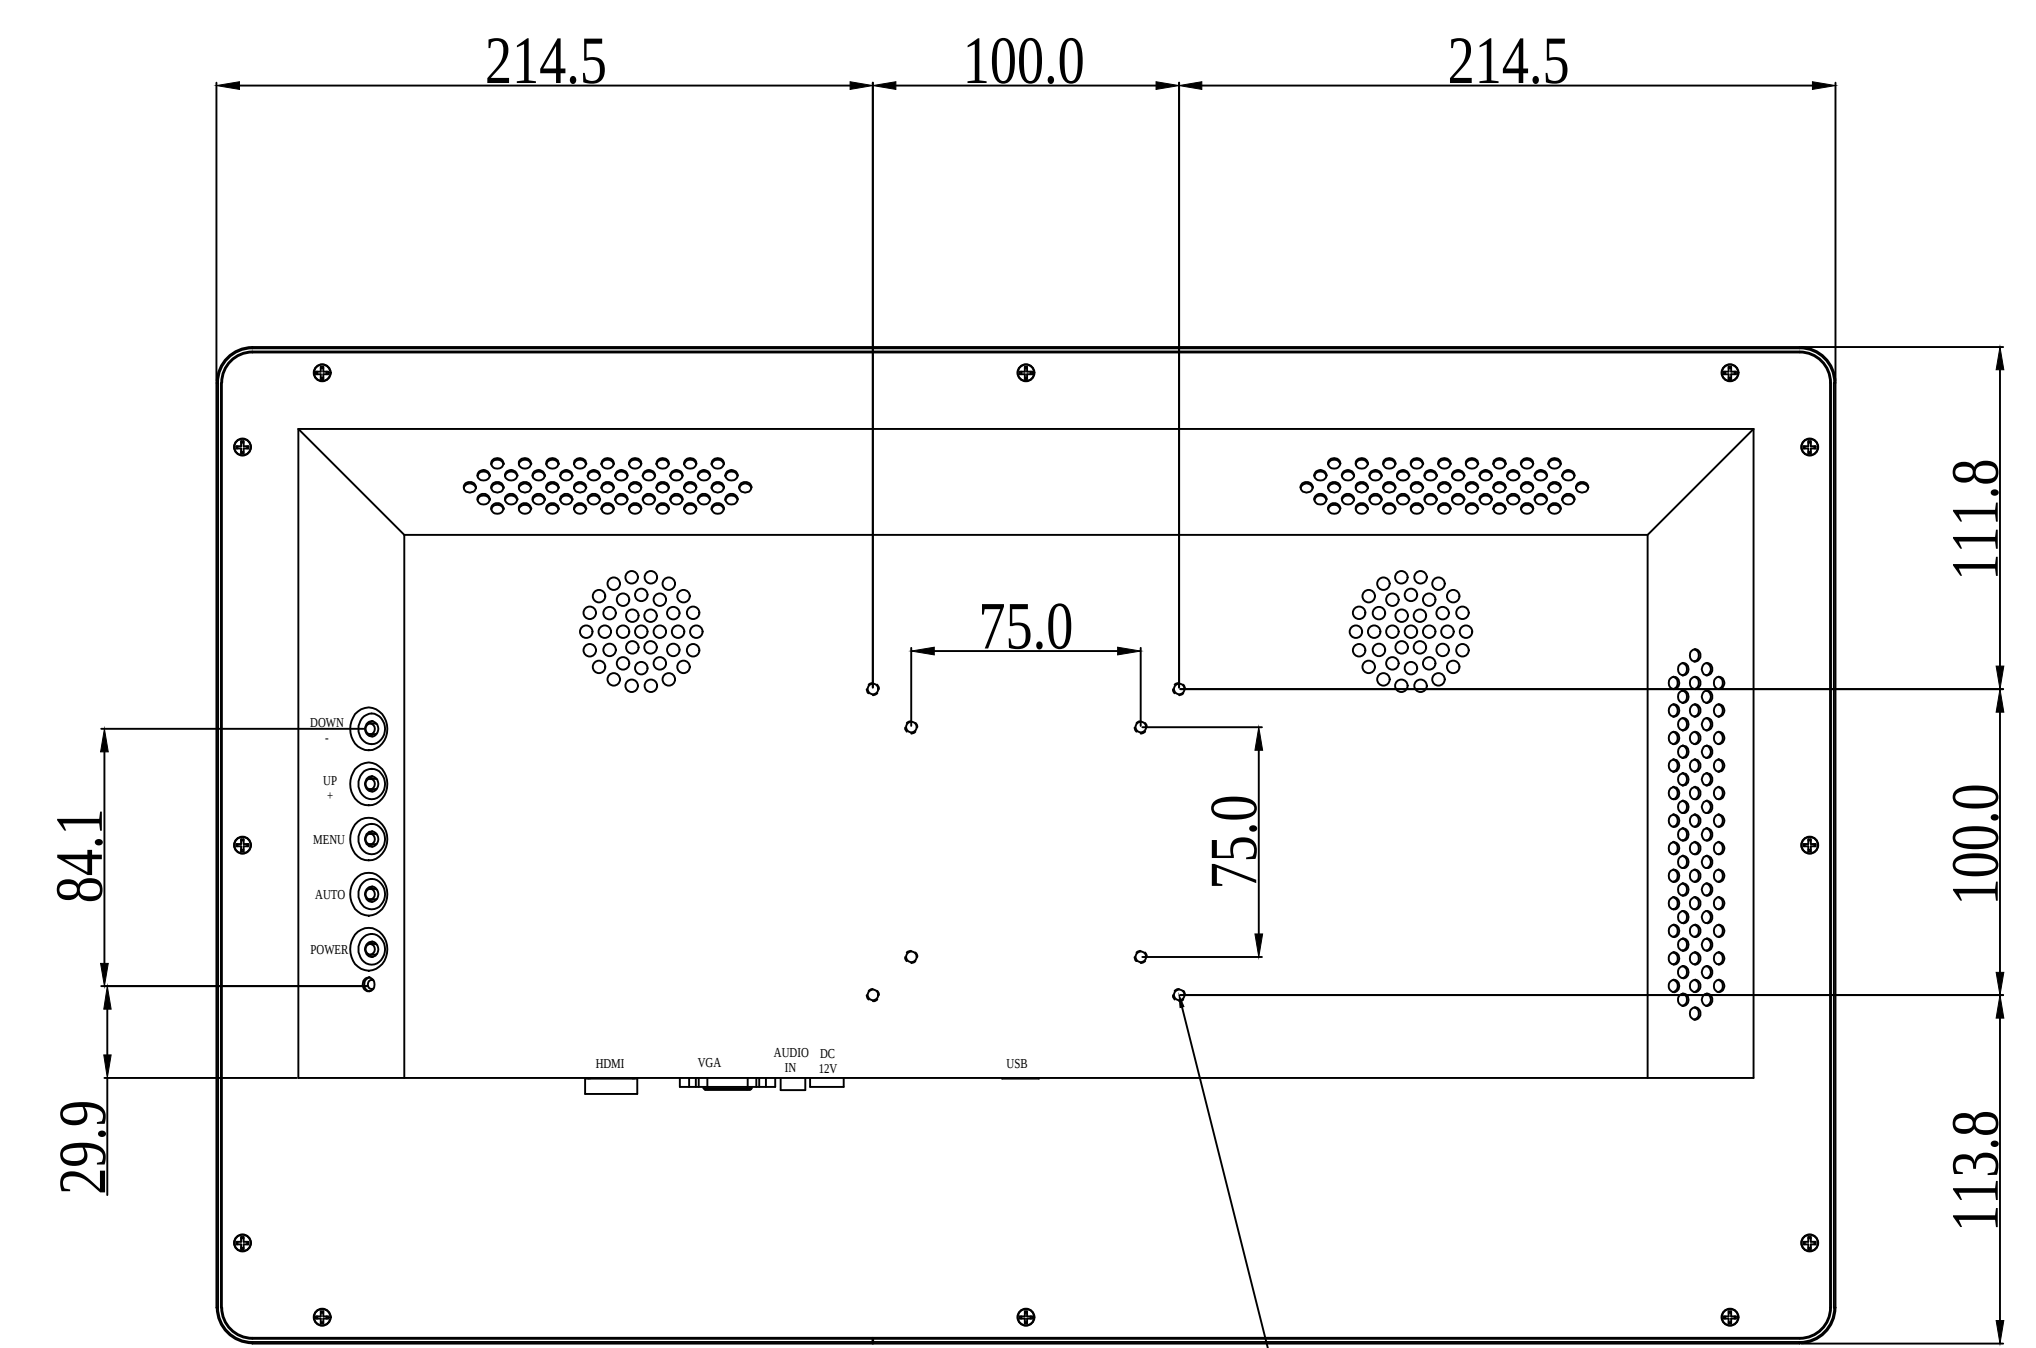
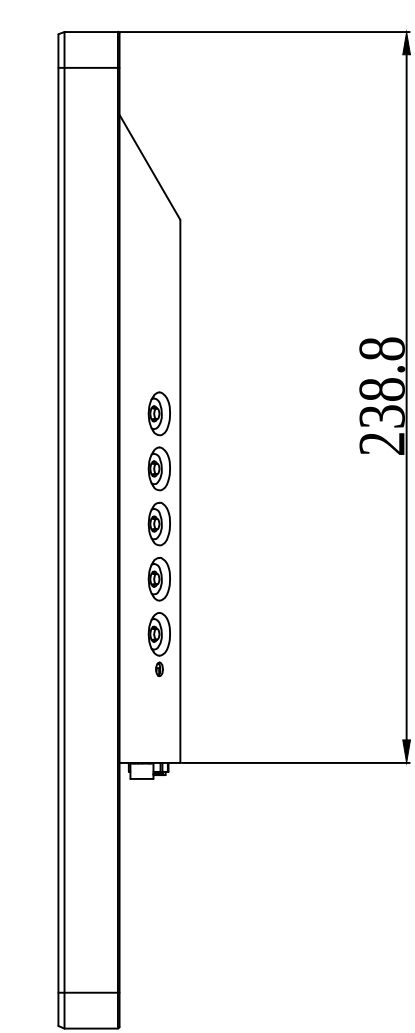
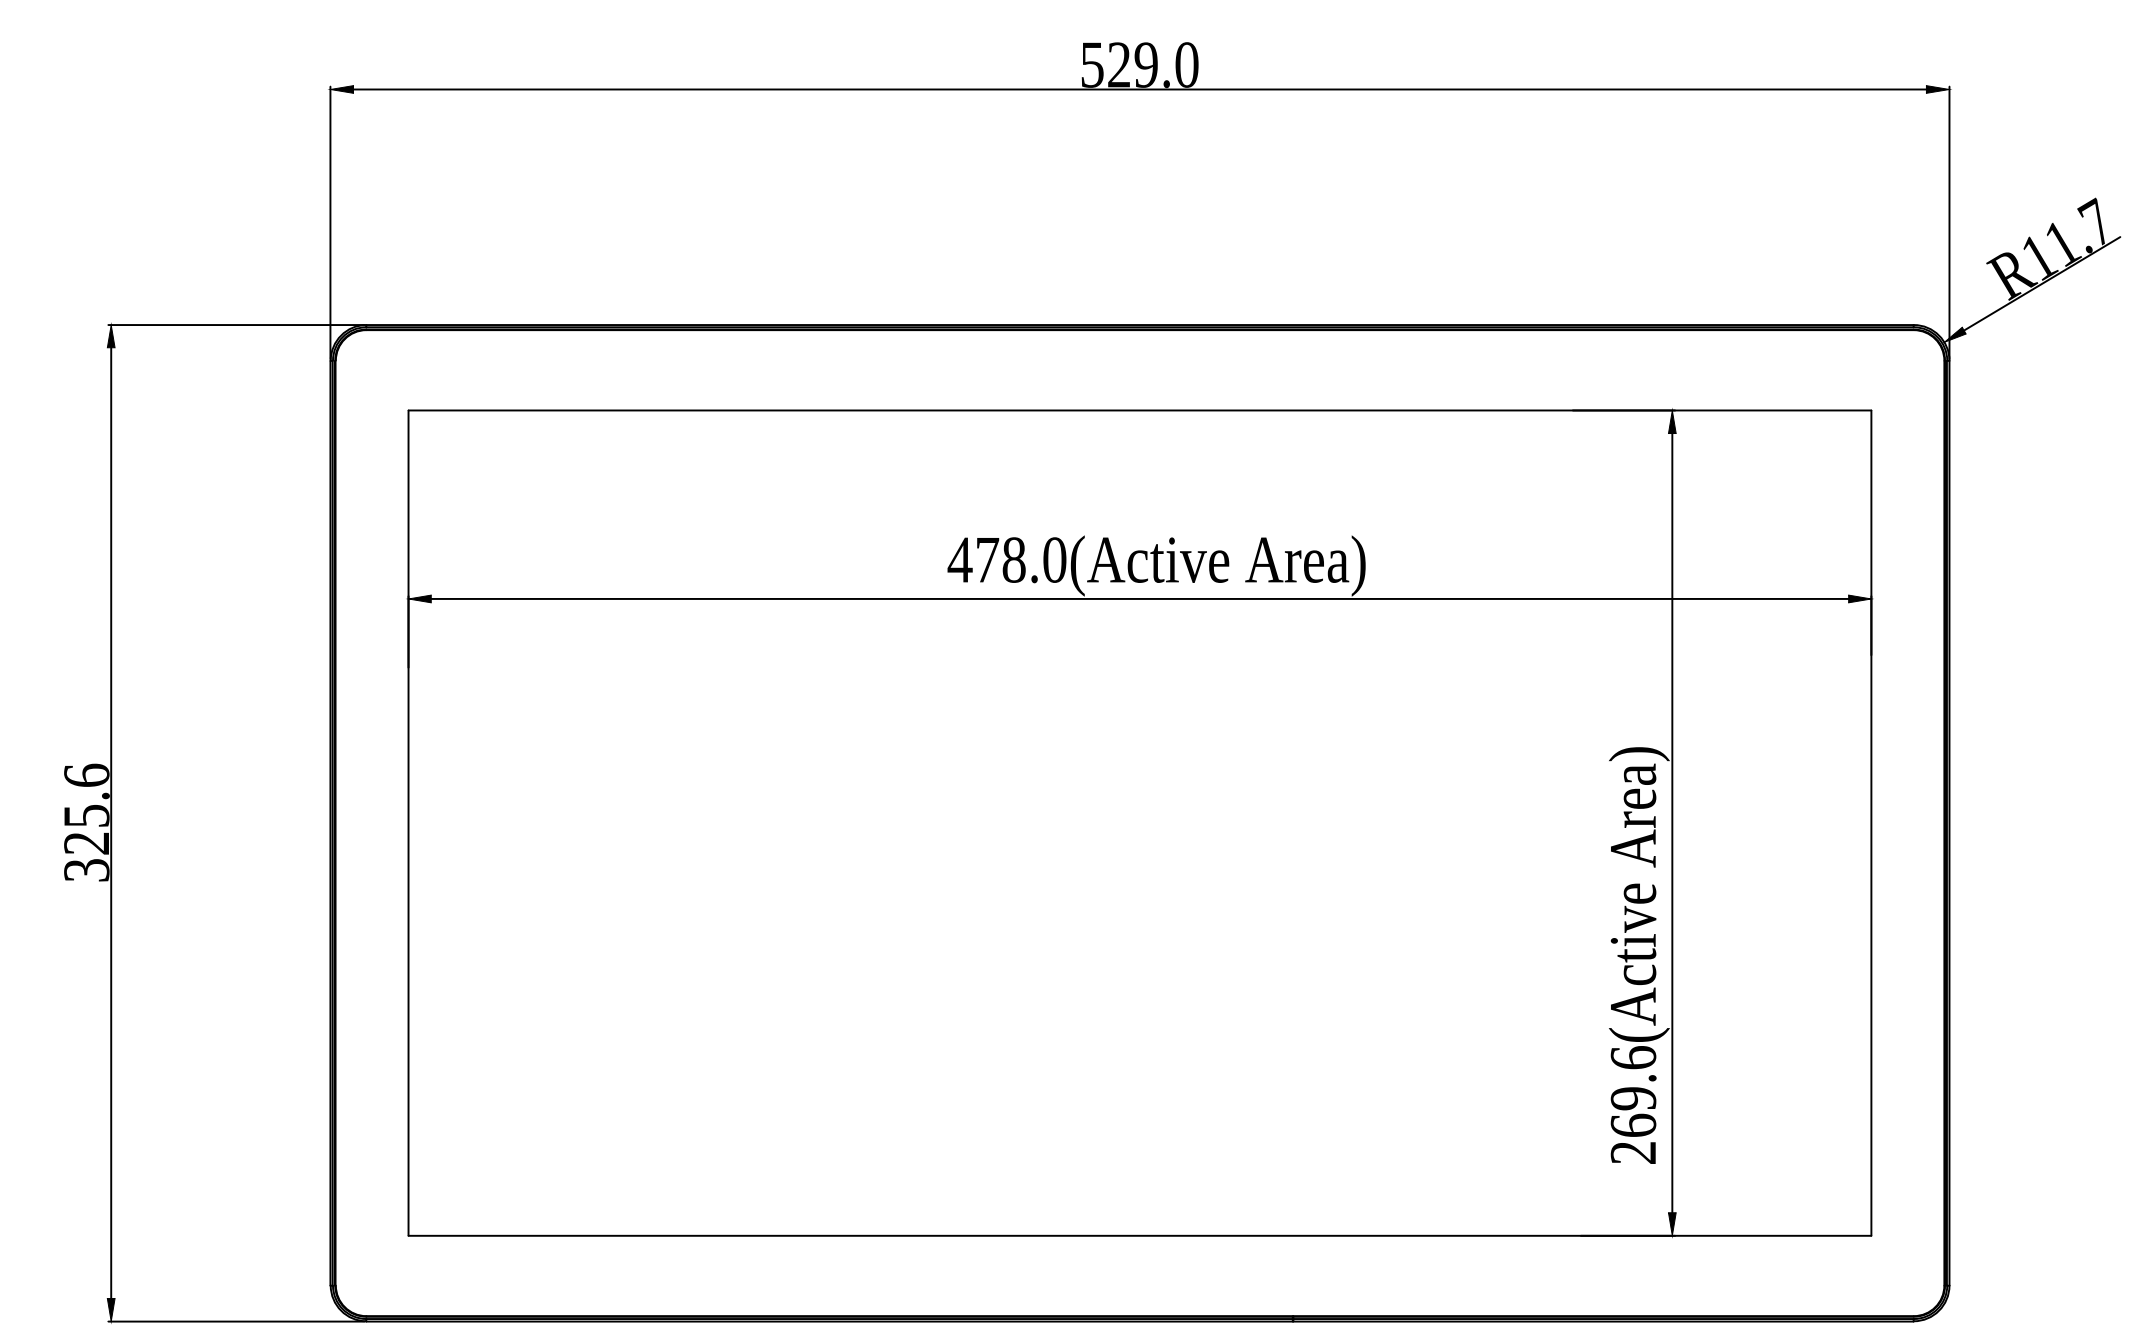
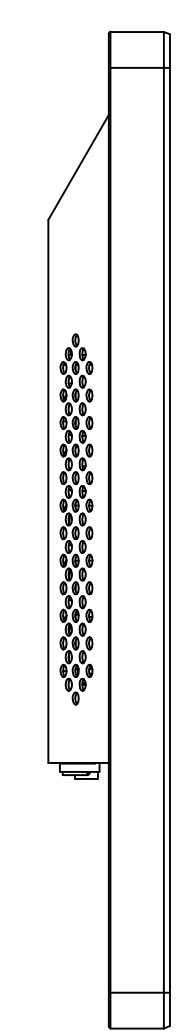


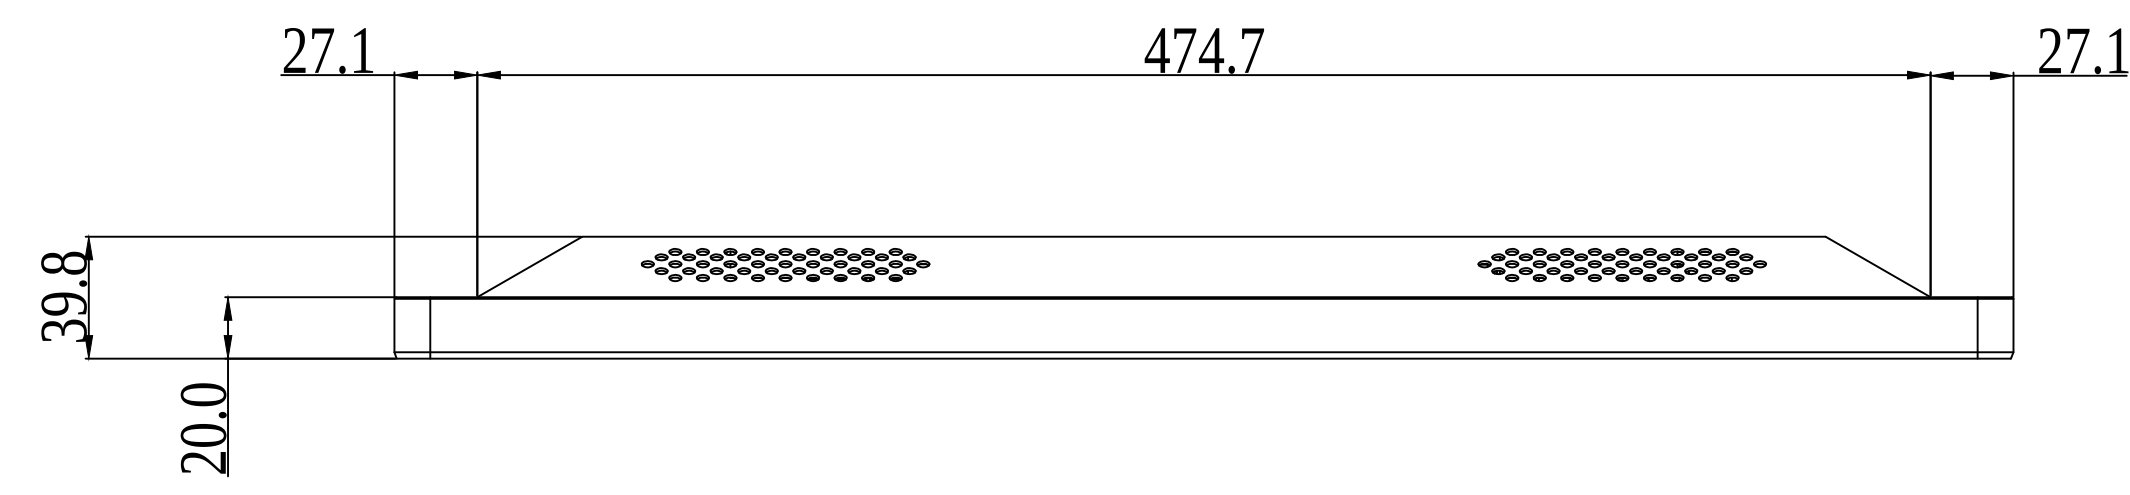


M4 Threads, X8
Max Screw Depth=6mm
From Mounting Surface

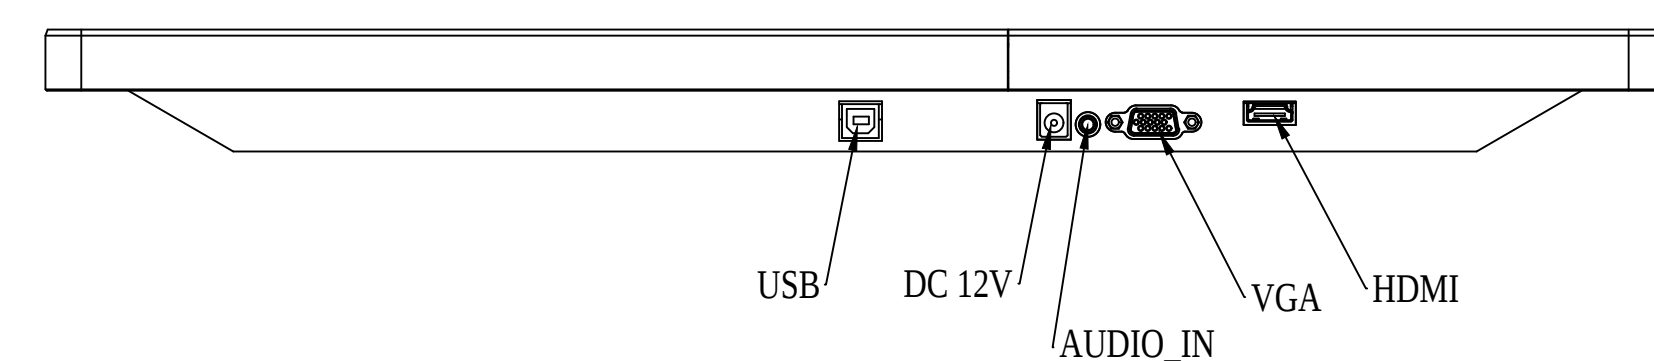

Title: OTL225-RC5A00-UH2200-1.0

Mark	Revised Contents	Signature
⚠		

ALL DIMENSIONS ARE IN MILLIMETERS

GENERAL Touch		GeneralTouch Co., Ltd.						
Specification		External Dimensions	529.0*325.6*39.8		Anti-Glare	Y ☐ N ☒		Designer: Zhou Bolin
Unit	Date	Active Area	478.0*269.6		DustProof	Y ☐ N ☒		
mm	2021/07/15	Glass Thickness	3 mm					
Projection: 		Silk Print Color						Checked By: Wang Zhenghua
		Mounting	VESA ☒		Bracket ☐			
Sheet 1 of 1		Notes						Approved By: Zhou Bolin
VER: 0.2	Scale: 1:1	Touch Technology	P-CAP		☒	SAW		
Tolerance: ±1.0mm			IR/PIT			Resistive		
			Non-Touch					