




GT CTL325 32" Touchcomputers (All In One)

GT 5 series commercial-grade touchcomputers (All-in-one) is available in 15.6", 21.5", 23.8", 27", and 32", elegant design with an accurate projected capacitive 10-point multitouch display. Its high-performance processor allows Windows OS to run fast and smoothly. It's an ideal touch solution for applications in industries such as retail, gaming, kiosk, self-service, finance, transit, conference, education, and healthcare.

Features & Benefits

- Window 7, 8, 10 with Intel Core i5 Processor
- Accurate PCAP Multi-touch Technology
- Full HD (1920 x 1080)
- 8GB RAM+128GB SSD
- VESA Mounting
- Edge-to-edge Design, Easy to Clean
- Anti-glare Optional
- WIFI Connector, Bluetooth optional
- USB, VGA, HDMI, LAN, Multiple interfaces

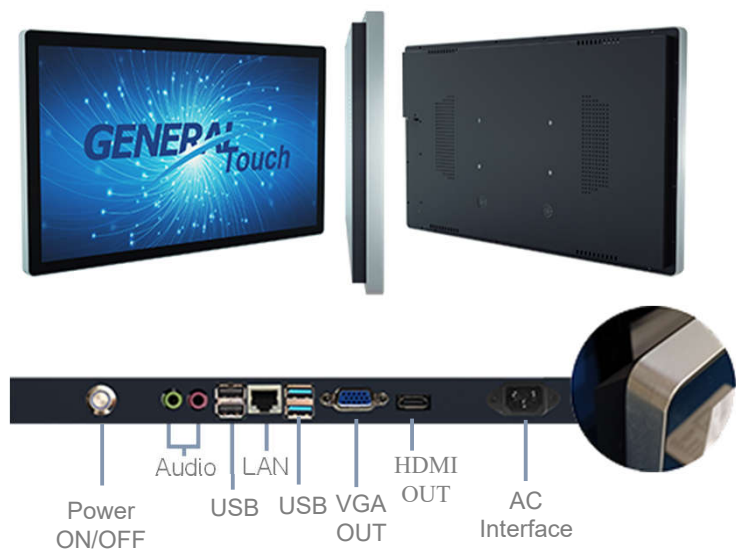

Applications

- | | | | | |
|----------|---------------|------------------|-----------|----------------|
| ■ Retail | ■ Corporation | ■ Medical | ■ Banking | ■ Self-service |
| ■ Gaming | ■ Kiosk | ■ Transportation | | |

SPECIFICATIONS

SPECIFICATIONS		
Name	32" Touchcomputers (All In One)	
Model	CTL325	
PC Parameters		
Processor	Intel Core i5 5200U/5257U/5300U or other CPU with comparable performance in the same series	
Memory	8GB	
Storage	128GB SSD	
Supported system	Windows 7/8/10 Linux	
Touch Technology	PCAP	
Touch Point	10	
LCD Panel Parameters		
Aspect Ratio	16:9	
Active Display Area (V x H)	698.4×392.85mm	
Native Resolution	1920×1080	
Response Time (Typ.)	8ms	
Display Colors	16.7M	
Luminance (Typ.)	400 cd/m²	
Contrast Ratio (Typ.)	1200:1	
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10	178° (89°/89°)
	Vertical (up/down) CR≥10	178° (89°/89°)
I/O Port		
LAN	1×RJ45	
WLAN	WIFI (Optional), Bluetooth (Optional)	
USB Port	2×USB2.0, 2×USB3.0	
VGA/HDMI/DP (Display) Port	1×VGA out, 1×HDMI out	
Audio	1×Line-out, 1×Mic in	
Power In	AC 110~240V	
Overall Parameters		
Case/Bezel Color	Black	
Mounting Options	VESA 100 ×200mm	
Outline Dimension (W×H×D)	752.7×447.3×49mm	

Power Supply	Input Voltage Range: 110~240VAC
Speaker(inside)	2*2W
Power Consumption (type)	80W
Operating Altitude	≤3000m
Temperature	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (non-condensing)	Operating: 20% to 80%, storage: 10% to 90%
Agency Approvals	FCC, CE
Warranty	2 years

Ordering Information

Model	Part Number	Description
CTL325-RCP-0B00-A0D-1.0	110303039R	32", I5-5200U/5257U/5300U, 8G+128G, 400nits, PCAP, Speaker

Optional Accessories

Model	Part Number	Description
AC cable		UK/EU/US 1500mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., LTD reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>