

### Easy to use, non-contacting flow meter for accurate flow measurement of "difficult" fluids from outside a pipe.

#### **Non-contacting flow measurement and control ultrasonic sensor mounts on any pipe.**

Micronics Doppler Flow Meters monitor the flow rate of dirty or aerated liquids including: wastewater, sewage, slurries, abrasives, and viscous liquids. Recommended for full pipes and any fluid that contains solids or bubbles.

The Micronics UF D5500 clamp-on sensor is mounted on the outside of any pipe 12.7mm / ½ inch diameter or larger. To measure velocity an acoustic signal is reflected back to the sensor from moving particles or gas bubbles suspended in the fluid. Flow is calculated based on configured pipe ID.

Installation is easy – without shutting down the flow system. No contact is made with the moving fluid and no pipe cutting or drilling is required. There is no fouling or scale build-up on the sensor.

The Micronics UF D5500 Doppler Flow Meter includes an ultrasonic sensor, an easy to use 5-key calibration system, a large digital flow rate display with totaliser, isolated 4–20mA output, 26 million point data logger, and two programmable control relays. The sensor is classified as non-incendive and an intrinsically safe sensor is optional.



[micronicsflowmeters.com](http://micronicsflowmeters.com)  
[sales@micronicsltd.co.uk](mailto:sales@micronicsltd.co.uk)  
(UK) +44 1628 243066

Micronics, British Rototherm Group,  
Kenfig Industrial Estate,  
Margam, Port Talbot,  
SA13 2PW



**ES France - Département Bio-tests & Industries**  
127 rue de Buzenval BP 26 - 92380 Garches



**Tél. 01 47 95 99 90**  
**Fax. 01 47 01 16 22**



**e-mail : [bio@es-france.com](mailto:bio@es-france.com)**  
**Site Web : [www.es-france.com](http://www.es-france.com)**



## Designed for "difficult" Liquids

The UF D5500 Doppler flow meter works best in applications that would defeat regular contacting flow meters. Because the sensor is mounted on the outside of the pipe, it is unaffected by abrasives or harsh fluids. There is no obstruction to flow and no pressure drop.

## Enhanced Signal Processing and Industrial Noise Immunity for Reliable Accuracy

The UF D5500 Doppler flow algorithm filters out background noise and interference. The high speed digital signal processor discriminates against weak and distorted signals for increased reliability and accuracy.

## Easy to Install

Each UF D5500 Doppler Flow Meter includes a clamp-on ultrasonic sensor, an adjustable stainless steel mounting clamp and sensor coupling compound.

The sensor fits on the outside of any pipe diameter 12.7 mm (½") or larger. It takes just a few minutes to install. There is no need to shut down flow.

## Simple, Single-Head Sensor Design

Ultrasonic signals are transmitted and received from a single-head sensor. The mounting clamp (included) ensures correct sensor alignment on horizontal or vertical pipes. The UF D5500 automatically self-tunes to the cable length up to 152 m (500 ft).

## Works on most Pipes

The UF D5500 Flow Meter measures flow in PVC, carbon steel, stainless steel, cast iron, HDPE ductile iron, and concrete lined ductile iron... any pipe material that conducts ultrasound.

Doppler signals cannot transmit through pipe walls which contain air pockets (e.g. concrete or wood), or loose pipe liners (with an air gap between the liner and pipe wall).

## Backlit Display with Easy to Use, 5-key Menu System

Configuration is easy with the new UF D5500 userfriendly menu system. Press the arrow keys to scroll through menus, change settings and enter calibration values. You can select English, French or Spanish menus, enable a password to protect settings and control brightness of the digital display.

## Reverse Flow Measurement


The UF D5500 measures flow in either direction and displays positive or negative values. You can control the Totaliser to subtract reverse flow, or to totalise forward flow only. The 4mA setting can also be adjusted to a negative flow setting.

## 26 Million Point Data Logger NEW Standard Feature

The UF D5500 Doppler Flow Meter comes standard with a built-in 26 million point data logger. It includes Windows software to display flow charts and tables, and to create dynamic flow reports. Just plug in a standard USB flash drive and log files are downloaded automatically.

## Principle of Operation

The UF D5500 Sensor transmits continuous high frequency sound through the pipe wall into the flowing liquid. Sound is reflected back to the Sensor from particles or gas bubbles in the liquid. If the liquid is flowing, the reflected sound returns at an altered frequency (the Doppler effect). The UF D5500 continuously measures this frequency shift to accurately measure velocity.

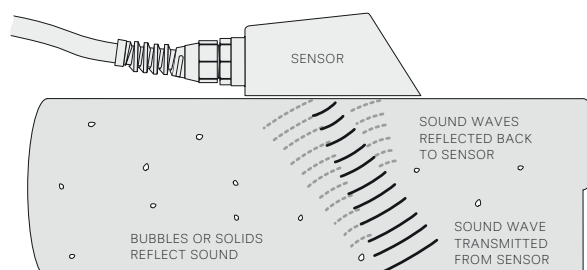

micronicsflowmeters.com  
sales@micronicsltd.co.uk  
(UK) +44 1628 243066

Micronics, British Rototherm Group,  
Kenfig Industrial Estate,  
Margam, Port Talbot,  
SA13 2PW



**ES France - Département Bio-tests & Industries**  
127 rue de Buzenval BP 26 - 92380 Garches



**Tél. 01 47 95 99 90**  
**Fax. 01 47 01 16 22**



**e-mail : bio@es-france.com**  
**Site Web : www.es-france.com**

# Micronics UF D5500 General Specifications

## SPECIFICATION:

**Flow Rate Range:**  $\pm 0.03$  to 12.2 m/sec ( $\pm 0.1$  to 40 ft/sec) in most applications

**Pipe Size:** Any pipe ID from 12.7 mm to 4.5 m ( $\frac{1}{2}$ " to 180")

**Accuracy:**  $\pm 2\%$  of reading or 0.03 m/sec (0.1 ft/sec) whichever is greater. Requires solids or bubbles minimum size of 100 microns, minimum concentration 75 ppm. Repeatability:  $\pm 0.1\%$ , Linearity  $\pm 0.5\%$

**Display:** White, backlit matrix – displays flow rate, relay states, 16-digit Totaliser, operating mode and calibration menu

**Configuration:** Built-in 5-button keypad with English, French or Spanish language selection

**Power Input:** 100–240VAC 50–60Hz, 10VA maximum. Optional: 9–32VDC, 10 WATTS maximum

**Outputs:** Isolated 4–20mA (1000 ohm load max.) or 0–5VDC (Field Selectable)

**Control Relays:** Qty 2, rated 5 amp SPDT, programmable flow alarm and/or proportional pulse

**Data Logger:** Built-in 26 million point logger with USB output and Windows™ software. NEW Standard Feature

**Enclosure:** Watertight, dust tight NEMA4X (IP 66) polyester with a clear polycarbonate face

**Electronics Operating Temperature:**  $-23^{\circ}$  to  $60^{\circ}\text{C}$  ( $-10^{\circ}$  to  $140^{\circ}\text{F}$ )

**Shipping Weight:** 6.3 kg (14 lbs)

**Approvals:** CE, CSA/UL/EN 61010-1

## SENSOR:

**Model SE4:** single-head ultrasonic with 7.6 m (25 ft) shielded cable and stainless steel mounting kit for pipes 12.7 mm ( $\frac{1}{2}$ " ID or larger. Designed to withstand accidental submersion to 10 psi

Certified non-incendive for Class I Division 2, Groups A, B, C, D hazardous locations

**Sensor Operating Temperature:**  $-40^{\circ}$  to  $150^{\circ}\text{C}$  ( $-40^{\circ}$  to  $300^{\circ}\text{F}$ )

**Exposed Materials:** 316 stainless steel

## OPTIONS:

**Sensors:** Intrinsic Safety Barriers for Sensor mounting in Class I, II, III, Div I, II, Groups C, D, E, F, G, hazardous locations – Contact Micronics

**NEW Industrial Automation Protocols:** Modbus® RTU via RS-485 or HART (field selectable)

**Sensor Cable:** 15 m (50 ft) or 30 m (100 ft) continuous shielded coaxial pair, or splice up to 152 m (500 ft) with Junction Box. Self tunes to extended cable

**Enclosure Heater:** For outdoor installation, thermostatically controlled to  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )

**Control Relays:** 4 additional (6 total) rated 5 amp SPDT


## APPLICATIONS:

**Recommended for:** Liquids containing suspended solids or bubbles minimum size of 100 microns, minimum concentration 75 ppm


**Pipe Materials:** Steel, stainless steel, cast iron, ductile iron, concrete lined ductile iron, PVC, HDPE, or any contiguous pipe material that conducts sound, including lined pipes with liner bonded to pipe wall. Avoid pipes with loose insertion liners and pipe walls which contain air



## DIMENSIONS



SE4 ULTRASONIC DOPPLER SENSOR

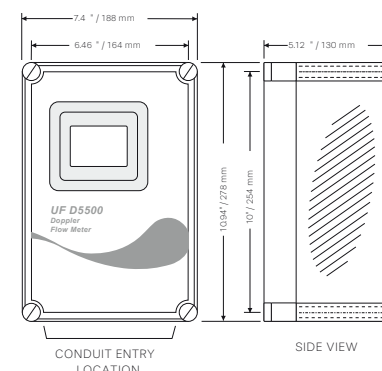

UF D5500 ENCLOSURE

micronicsflowmeters.com  
sales@micronicsltd.co.uk  
(UK) +44 1628 243066

Micronics, British Rototherm Group,  
Kenfig Industrial Estate,  
Margam, Port Talbot,  
SA13 2PW



ES France - Département Bio-tests & Industries  
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 90  
Fax. 01 47 01 16 22



e-mail : bio@es-france.com  
Site Web : www.es-france.com



# Non-contacting doppler flow meter.

## Measures, Displays, Totalises and Controls from Outside a Pipe

The Micronics UF D5500 flow sensor installs without cutting the pipe. It takes just a few minutes to mount on the outside of any pipe. Configuration is easy with the built-in, 5-button keypad. Select your choice of flow units and enter pipe diameter through the user-friendly calibration menu. Enable password protection to prevent tampering.

### Special Features:

- Digital processing system tracks flow signals accurately
- Noise suppression circuitry filters background noise and electrical interference from industrial environments
- Automatically converts between measurement units (e.g. litres or gallons)
- Calibration data and totaliser values are stored automatically during power interruptions
- Output "simulation" function simplifies calibration of remote devices (e.g. chart recorders or controllers)
- Self-tunes to sensor cable length

### Benefits of Non-Contacting Flow Measurement:

No Contact means no maintenance, no sensor fouling, no obstruction to flow, no pressure drop, no corrosion and no pipe cutting or drilling for installation.

### Designed for:

- Raw Sewage
- Viscous Liquids
- Sludge and Slurries
- Solvents
- Pulp Stock
- Food Products
- Lubricating Oils
- Crude Oil

Ideal for full pipes and any liquid containing gas bubbles or solids larger than 100 microns and in concentrations greater than 75 ppm.



[micronicsflowmeters.com](http://micronicsflowmeters.com)  
[sales@micronicsltd.co.uk](mailto:sales@micronicsltd.co.uk)  
(UK) +44 1628 243066

Micronics, British Rototherm Group,  
Kenfig Industrial Estate,  
Margam, Port Talbot,  
SA13 2PW



**ES France - Département Bio-tests & Industries**  
127 rue de Buzenval BP 26 - 92380 Garches



**Tél. 01 47 95 99 90**  
**Fax. 01 47 01 16 22**



**e-mail : [bio@es-france.com](mailto:bio@es-france.com)**  
**Site Web : [www.es-france.com](http://www.es-france.com)**