



## SSF1515-E / SSH1515-E V2

**15.9" Resizing LCD, 1000 nits LED backlight, 1280x512 ultra wide aspect ratio 16:6.4**

The SSF/SSH1515-E V2 is a 15.9 inch color TFT-LCD display with special aspect ratio 16:6.4 and wide resolution 1280 x 512. It is Litemax's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

### Key Features

- Resizing LCD
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 70,000 hours



### Specifications

| Model Name               | SSF1515-E / SSH1515-E V2                              |
|--------------------------|-------------------------------------------------------|
| Description              | 15.9" Resizing LCD, 1000 nits LED backlight, 1280x512 |
| Screen Size              | 15.9"                                                 |
| Display Area (mm)        | 376.3(H) x 150.5(V)                                   |
| Brightness               | 1000 cd/m <sup>2</sup>                                |
| Resolution               | 1280 x 512                                            |
| Aspect Ratio             | 16 : 6.4                                              |
| Contrast Ratio           | 1000 : 1                                              |
| Pixel Pitch (mm)         | 0.294(H) x 0.294(V)                                   |
| Pixel Per Inch (PPI)     | 86                                                    |
| Viewing Angle            | 170°(H), 160°(V)                                      |
| Color Saturation (NTSC)  | 79%                                                   |
| Display Colors           | 16.7M                                                 |
| Response Time (Typical)  | 5ms                                                   |
| Panel Interface          | LVDS                                                  |
| AD Board Input Interface | VGA, DVI-D                                            |
| AD Board Input Power     | DC12V                                                 |
| Power Consumption        | 12W, (15W with AD Board)                              |
| OSD Key                  | 4 Keys (Power Switch, Menu, +, -)                     |
| OSD Control              | Brightness, Color, Contrast, H/V Position...etc       |
| Dimensions (mm)          | 396.0 x 173.6 x 12.1                                  |
| Bezel Size(U/B/L/R)      | 9.6/9.6/7.9/7.9 mm                                    |
| Weight (Net)             | 1 kg                                                  |
| Operating Temperature    | 0 °C ~ 50 °C                                          |
| Storage Temperature      | -20 °C ~ 60 °C                                        |

SSF= Panel+ LED Driving Board

SSH= Panel+ LED Driving Board + Control Board


Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.



## Outline Dimensions

Unit: mm

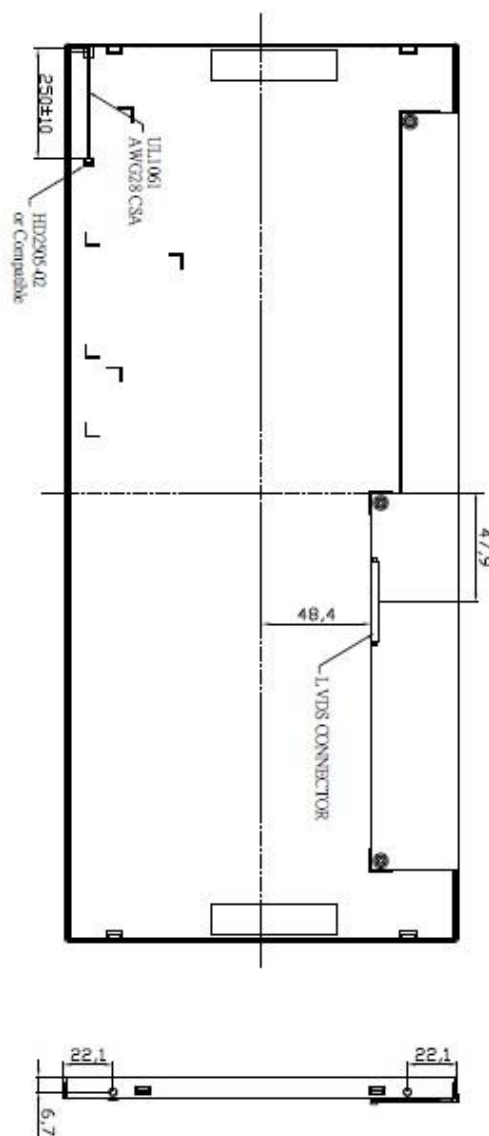



### Ordering Information

| Part Number            | Description                                           |
|------------------------|-------------------------------------------------------|
| <b>SSF1515-ENN-A11</b> | 15.9",1000nits,1280*512,LID15,5in1,V02                |
| <b>SSH1515-ENN-G11</b> | 15.9",1000nits,1280*512,LID15,AD2662GD,DC12V,5in1,V02 |
|                        |                                                       |

### Optional Accessories

| Part Number                    | Description                                                                              |
|--------------------------------|------------------------------------------------------------------------------------------|
| <b>980000460010</b>            | SET.OTHER,ADAPTER REWORK.60W PAA060F WITH.POWER DIN 4pin lock,P                          |
| <b>810618301010 (Optional)</b> | CABLE.POWER.AC.1830mm.(US Type).3PIN PLUG TO SOCKET.SVT(SPT-2 )18AWG 3C BLACK,P.         |
| <b>810618301090 (Optional)</b> | CABLE,POWER,AC,1830mm.(EU Type) 3PIN PLUG TO.SOCKET,H05VV-F 3G.0.75MMSQ BLACK,P          |
| <b>810618301050 (Optional)</b> | CABLE,POWER,AC,1830mm.UK(FUSE) 3PIN PLUG TO.SOCKET,H05VV-F 3C(3G) 0.75MMSQ BLACK,P       |
| <b>810618301170 (Optional)</b> | CABLE.POWER,AC,1830mm. (AU Type) 3PIN PLUG TO 2P SOCKET.LTSA 0.75MMSQ BLACK,P            |
| <b>810618301030 (Optional)</b> | CABLE.POWER.AC.1830mm.(JP Type).2PIN PLUG Y TERMINAL TO. SOCKET.VCTF 3C 0.75MMSQ BLACK,P |

### By Customer Request

|              |                                 |
|--------------|---------------------------------|
| <b>Glass</b> | Tempered glass, AR coating..... |
|--------------|---------------------------------|