

Wireless Sensor Endpoint

Sensor Connectivity Solution

WSE-1340



Connectivity

- Cellular Cat M1/NB-IoT
- Bluetooth® 5
- NFC
- 802.15.4

Features

- Cortex M4F 32-bit application processor with 1MB flash memory / 256K RAM
- 4MB external flash memory
- GPS receiver included in cellular radio
- LED indicator
- Lithium-Ion Polymer battery pack

Sensors

- Relative Humidity and Temperature
- 9-axis Inertial Measurement Unit
- Microphone





Wireless Sensor Endpoint

Sensor Connectivity Solution

The PCTEL® Wireless Sensor Endpoint (WSE) family are versatile Industrial IoT products that offer multiple radio connectivity options including cellular, Bluetooth® 5, NFC as well as 802.15.4 support.

In addition to several radios, the PCTEL WSE family includes several sensors to monitor a variety of physical conditions. These sensors can detect temperature, relative humidity, acceleration, angular rate of change, magnetic field, and sound.

The PCTEL WSE is powered by a high capacity Lithium-Ion Polymer battery pack. The enclosure also has two mounting tabs for easy installation.




Wireless Sensor Endpoint

Sensor Connectivity Solution

Features and Benefits

Feature	Benefit
ARM Mbed Enabled	Faster time to market leveraging ARM Mbed OS to accelerate application software development.
Internal Radio Antennas	No external connections with each radio having an individual antenna.
Rechargeable Battery Pack	Easily recharge the battery via USB Micro-B connector.
Mounting Tabs	Enclosure with two integrated tabs for easy installation.
Integrated Debug Interface	Ease of software development using the Wireless Sensor Development System.
Nano-Sim Card Holder	Easy installation of preferred cellular provider SIM card.
Power Switch	WSE can be turned on and off as needed.
Push Button	User defined operation.

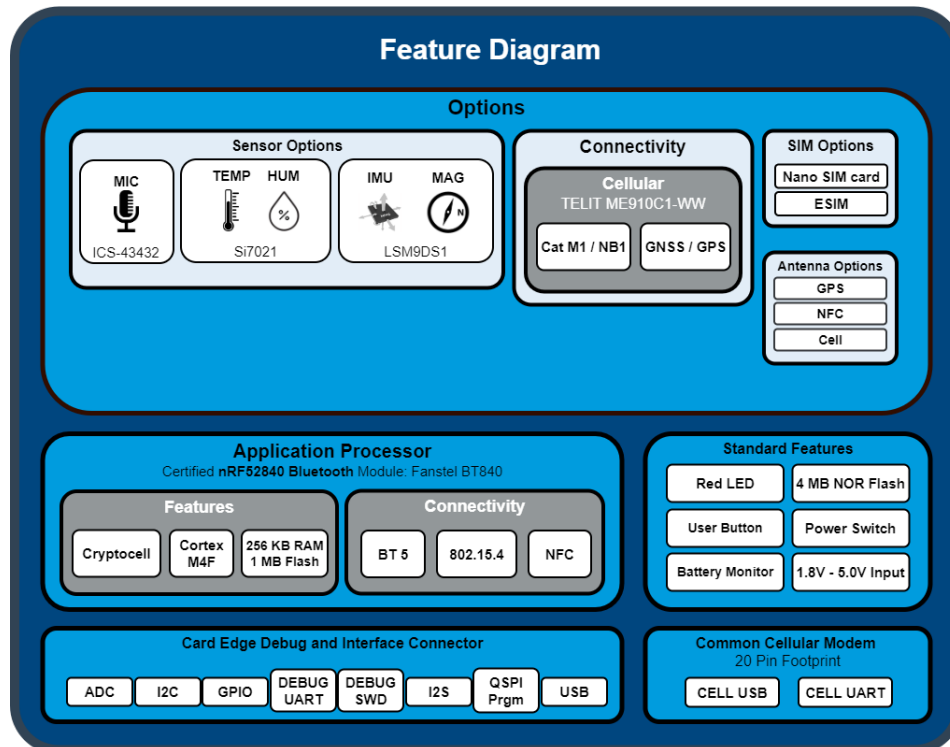

Wireless Sensor Endpoint

Sensor Connectivity Solution

General Specifications

Parameter	Specification
Operating Temperature	-20°C to +60°C
Charging Temperature	0°C to +45°C
Storage Temperature	-20°C to +45°C (1-month) -20°C to +35°C (6-months)
Battery Pack	Li-Ion Polymer, 3.7V @ 4400mAh
Dimensions	60mm x 103mm x 43mm

Sensor Specifications

Device	Specification
Relative Humidity / Temperature	±3% RH (max) 0-80% RH / ±0.4°C (max) -10°C to +85°C
9-Axis Inertial Measurement Unit	3-axis Accelerometer: ±2/±4/±8/±16 g (linear) 3-axis Angular rate: ±245/±500/±2000 dps 3-axis Magnetic position: ±4/±8/±12/±16 gauss
Microphone	Frequency response: 50 Hz to 20 kHz SNR: 65 dBA, Sensitivity -26 dB FS




Wireless Sensor Endpoint

Sensor Connectivity Solution

Component Identification Diagram


Top

Component	Function	COLOR
Telit ME910C1-WW	Cat-M1 / NB-IoT / GNSS	Red
		Orange
BT840	MCU - BT5 - 802.15.4 - NFC	Green
		White
SI7021	Temp - Humidity	Cyan
		Blue
ST LSM9DS1	Accel - Gyro - Mag	Dark Blue
TDK ICS-43432	Microphone	Purple
Winbond	4MB QSPI NOR Flash	Magenta
RED LED	Indicator	Red

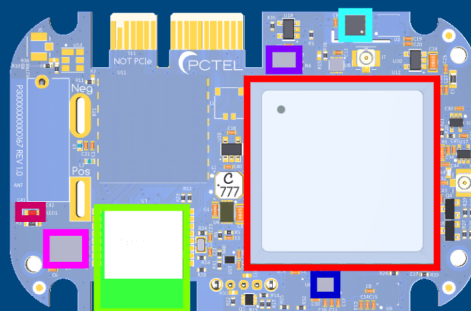

Bottom

Component	Function	COLOR
Nano-SIM Holder	Size 4FF	Red
eSIM	Embedded SIM IC	Orange
Push Button	User button	Green
Power Switch	Slide Switch	White
Battery Connector	JST	Blue
Modem Connector	Common Footprint for Cellular	Cyan

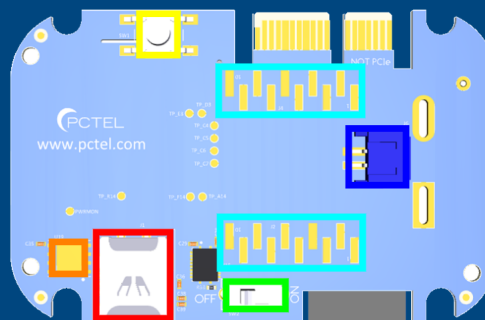

CONTACT US

For more information about
this product contact your
sales representative or visit
> pctel.com/industrial-iot-devices

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology solutions, including purpose-built Industrial IoT devices, antenna systems, and test and measurement products. Trusted by our customers for over 25 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.

Product Usage

THE PRODUCTS ARE NOT DESIGNED, MANUFACTURED, OR INTENDED FOR USE, ALONE OR WITH OTHER PRODUCTS, IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE OF THE PRODUCTS AND/OR IN WHICH A MALFUNCTION OR A FAILURE OF THE PRODUCTS COULD LEAD TO DEATH, PERSONAL INJURY, OR SERIOUS PHYSICAL OR ENVIRONMENTAL DAMAGE, INCLUDING BUT NOT LIMITED TO (A) SURGICALLY IMPLANTED DEVICES, LIFE SUPPORT MACHINES, LIFE PRESERVING MEDICAL DEVICES OR SYSTEMS, OTHER MEDICAL AND SURGICAL APPLICATIONS, OR ANY DEVICES, MACHINES, SYSTEMS, PRODUCTS, OR PROCESSES REQUIRING APPROVAL, TESTING OR CERTIFICATION BY THE U.S. FOOD AND DRUG ADMINISTRATION OR A SIMILAR GOVERNMENTAL ENTITY; (B) AIR TRAFFIC CONTROL OR AIRCRAFT SYSTEMS; (C) CONTROL EQUIPMENT FOR NUCLEAR OR OTHER POWER GENERATION FACILITIES; OR (D) MISSILE, NUCLEAR, BIOLOGICAL, OR CHEMICAL WEAPONS, OR OTHER MILITARY APPLICATIONS (EACH A **"PROHIBITED USE"**).

ANY AND ALL PROHIBITED USE OF THE PRODUCTS IS STRICTLY PROHIBITED, AS IS ANY SALE OR RESALE OF THE PRODUCTS FOR A PROHIBITED USE. PCTEL SHALL HAVE NO LIABILITY FOR ANY USE OF THE PRODUCTS IN ANY MANNER FOR, OR IN CONNECTION WITH, A PROHIBITED USE. ANY SUCH USE SHALL VOID ANY WARRANTIES AND INDEMNITIES PROVIDED BY PCTEL, AS WELL AS ALL OTHER OBLIGATIONS OF PCTEL, INCLUDING, WITHOUT LIMITATION, WITH RESPECT TO SUPPORT. PCTEL SHALL NOT BE DEEMED TO HAVE CONSENTED TO OR APPROVED ANY PROHIBITED USE BY PROVIDING WARRANTY, SUPPORT, OR ANY OTHER SERVICE. ANY PARTY USING THE PRODUCTS IN A PROHIBITED USE SHALL INDEMNIFY AND HOLD HARMLESS PCTEL FROM ANY CLAIMS, LIABILITIES, AND EXPENSES ARISING IN CONNECTION WITH SUCH PROHIBITED USE.



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com

Wireless Sensor Endpoint

Sensor Connectivity Solution

WSE-1330



Connectivity

- Cellular Cat M1/NB-IoT
- Bluetooth® 5
- NFC
- 802.15.4

Features

- Cortex M4F 32-bit application processor with 1MB flash memory / 256K RAM
- 4MB external flash memory
- GPS receiver included in cellular radio
- LED indicator
- Lithium-Ion Polymer battery pack

Sensors

- 9-axis Inertial Measurement Unit
- Gas, Air Quality, Pressure, Temperature and Humidity
- Microphone





Wireless Sensor Endpoint

Sensor Connectivity Solution

The PCTEL® Wireless Sensor Endpoint (WSE) family are versatile Industrial IoT products that offer multiple radio connectivity options including cellular, Bluetooth® 5, NFC as well as 802.15.4 support.

In addition to several radios, the PCTEL WSE family includes several sensors to monitor a variety of physical conditions. These sensors can detect air quality, acceleration, angular rate of change, magnetic field, and sound.

The PCTEL WSE is powered by a high capacity Lithium-Ion Polymer battery pack. The enclosure also has two mounting tabs for easy installation.




Wireless Sensor Endpoint

Sensor Connectivity Solution

Features and Benefits

Feature	Benefit
ARM Mbed Enabled	Faster time to market leveraging ARM Mbed OS to accelerate application software development.
Internal Radio Antennas	No external connections with each radio having an individual antenna.
Rechargeable Battery Pack	Easily recharge the battery via USB Micro-B connector.
Mounting Tabs	Enclosure with two integrated tabs for easy installation.
Integrated Debug Interface	Ease of software development using the Wireless Sensor Development System.
Nano-Sim Card Holder	Easy installation of preferred cellular provider SIM card.
Power Switch	WSE can be turned on and off as needed.
Push Button	User defined operation.

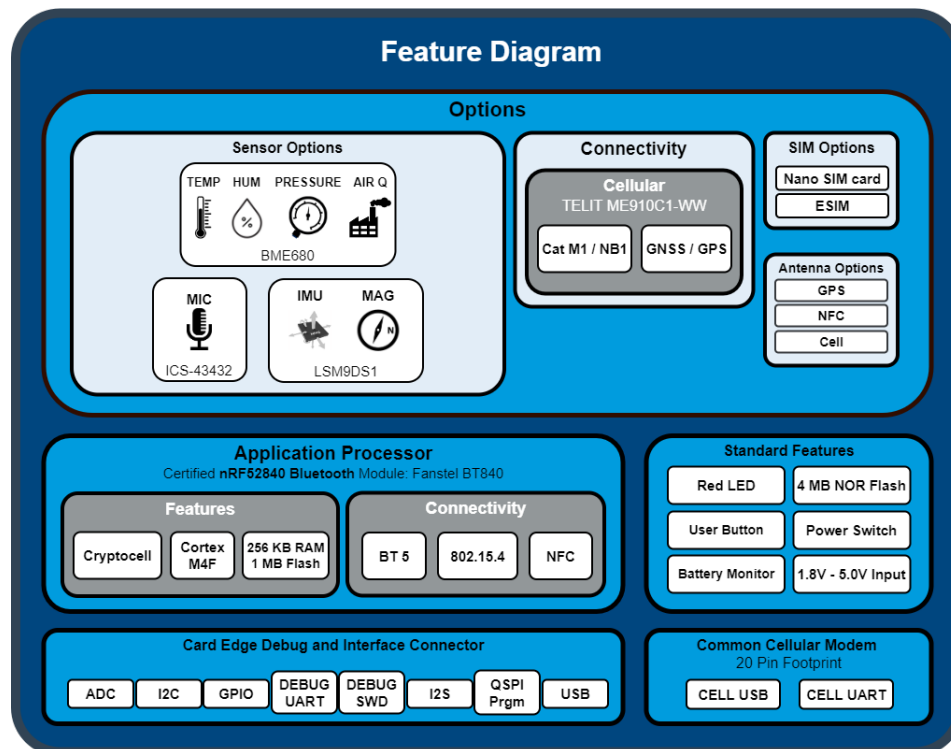

Wireless Sensor Endpoint

Sensor Connectivity Solution

General Specifications

Parameter	Specification
Operating Temperature	-20°C to +60°C
Charging Temperature	0°C to +45°C
Storage Temperature	-20°C to +45°C (1-month) -20°C to +35°C (6-months)
Battery Pack	Li-Ion Polymer, 3.7V @ 4400mAh
Dimensions	60mm x 103mm x 43mm

Sensor Specifications

Device	Specification
9-Axis Inertial Measurement Unit	3-axis Accelerometer: $\pm 2/\pm 4/\pm 8/\pm 16$ g (linear) 3-axis Angular rate: $\pm 245/\pm 500/\pm 2000$ dps 3-axis Magnetic position: $\pm 4/\pm 8/\pm 12/\pm 16$ gauss
Microphone	Frequency response: 50 Hz to 20 kHz SNR: 65 dBA, Sensitivity -26 dB FS
Environmental Gas / Air Quality	Gas (VOC): 20% tolerance; 5% accuracy
	Pressure: 300 to 1100 hPa (± 0.6 hPa)
	Humidity: 10% to 90% RH ($\pm 3\%$) at 0°C to +65°C
	Temperature: -40°C to +85°C ($\pm 1^\circ\text{C}$), 25°C ($\pm 0.5^\circ\text{C}$)
	Air Quality Score: 0 to 500 ($\pm 15\%$)




Wireless Sensor Endpoint

Sensor Connectivity Solution

Component Identification Diagram


Top

Component	Function	COLOR
Telit ME910C1-WW	Cat-M1 / NB-IoT / GNSS	Red
		Yellow
BT840	MCU - BT5 - 802.15.4 - NFC	Green
BOSCH BME680	Temp - Hum - Pres - Air Q	White
		Cyan
ST LSM9DS1	Accel - Gyro - Mag	Blue
TDK ICS-43432	Microphone	Purple
Winbond	4MB QSPI NOR Flash	Magenta
RED LED	Indicator	Red

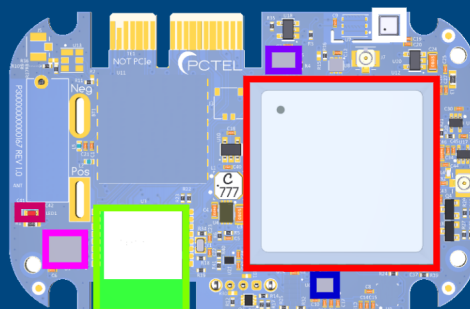

Bottom

Component	Function	COLOR
Nano-SIM Holder	Size 4FF	Red
eSIM	Embedded SIM IC	Orange
Push Button	User button	Yellow
Power Switch	Slide Switch	Green
Battery Connector	JST	Blue
Modem Connector	Common Footprint for Cellular	Cyan

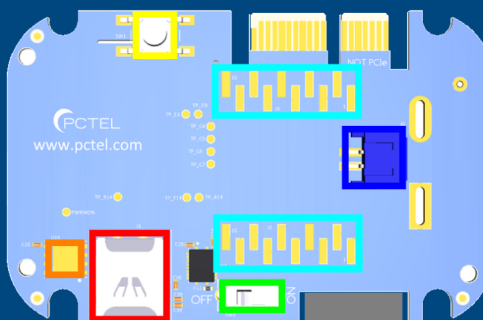

CONTACT US

For more information about
this product contact your
sales representative or visit
> pctel.com/industrial-iot-devices

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology solutions, including purpose-built Industrial IoT devices, antenna systems, and test and measurement products. Trusted by our customers for over 25 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.

Product Usage

THE PRODUCTS ARE NOT DESIGNED, MANUFACTURED, OR INTENDED FOR USE, ALONE OR WITH OTHER PRODUCTS, IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE OF THE PRODUCTS AND/OR IN WHICH A MALFUNCTION OR A FAILURE OF THE PRODUCTS COULD LEAD TO DEATH, PERSONAL INJURY, OR SERIOUS PHYSICAL OR ENVIRONMENTAL DAMAGE, INCLUDING BUT NOT LIMITED TO (A) SURGICALLY IMPLANTED DEVICES, LIFE SUPPORT MACHINES, LIFE PRESERVING MEDICAL DEVICES OR SYSTEMS, OTHER MEDICAL AND SURGICAL APPLICATIONS, OR ANY DEVICES, MACHINES, SYSTEMS, PRODUCTS, OR PROCESSES REQUIRING APPROVAL, TESTING OR CERTIFICATION BY THE U.S. FOOD AND DRUG ADMINISTRATION OR A SIMILAR GOVERNMENTAL ENTITY; (B) AIR TRAFFIC CONTROL OR AIRCRAFT SYSTEMS; (C) CONTROL EQUIPMENT FOR NUCLEAR OR OTHER POWER GENERATION FACILITIES; OR (D) MISSILE, NUCLEAR, BIOLOGICAL, OR CHEMICAL WEAPONS, OR OTHER MILITARY APPLICATIONS (EACH A **"PROHIBITED USE"**).

ANY AND ALL PROHIBITED USE OF THE PRODUCTS IS STRICTLY PROHIBITED, AS IS ANY SALE OR RESALE OF THE PRODUCTS FOR A PROHIBITED USE. PCTEL SHALL HAVE NO LIABILITY FOR ANY USE OF THE PRODUCTS IN ANY MANNER FOR, OR IN CONNECTION WITH, A PROHIBITED USE. ANY SUCH USE SHALL VOID ANY WARRANTIES AND INDEMNITIES PROVIDED BY PCTEL, AS WELL AS ALL OTHER OBLIGATIONS OF PCTEL, INCLUDING, WITHOUT LIMITATION, WITH RESPECT TO SUPPORT. PCTEL SHALL NOT BE DEEMED TO HAVE CONSENTED TO OR APPROVED ANY PROHIBITED USE BY PROVIDING WARRANTY, SUPPORT, OR ANY OTHER SERVICE. ANY PARTY USING THE PRODUCTS IN A PROHIBITED USE SHALL INDEMNIFY AND HOLD HARMLESS PCTEL FROM ANY CLAIMS, LIABILITIES, AND EXPENSES ARISING IN CONNECTION WITH SUCH PROHIBITED USE.



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com

Wireless Sensor Endpoint

Sensor Connectivity Solution

WSE-1320



Connectivity

- Cellular Cat M1/NB-IoT
- Bluetooth® 5
- NFC
- 802.15.4

Features

- Cortex M4F 32-bit application processor with 1MB flash memory / 256K RAM
- 4MB external flash memory
- GPS receiver included in cellular radio
- LED indicator
- Lithium-Ion Polymer battery pack

Sensors

- Relative Humidity and Temperature
- 6-axis Inertial Measurement Unit
- Microphone





Wireless Sensor Endpoint

Sensor Connectivity Solution

The PCTEL® Wireless Sensor Endpoint (WSE) family are versatile Industrial IoT products that offer multiple radio connectivity options including cellular, Bluetooth® 5, NFC as well as 802.15.4 support.

In addition to several radios, the PCTEL WSE family includes several sensors to monitor a variety of physical conditions. These sensors can detect temperature, relative humidity, acceleration, angular rate of change, and sound.

The PCTEL WSE is powered by a high capacity Lithium-Ion Polymer battery pack. The enclosure also has two mounting tabs for easy installation.




Wireless Sensor Endpoint

Sensor Connectivity Solution

Features and Benefits

Feature	Benefit
ARM Mbed Enabled	Faster time to market leveraging ARM Mbed OS to accelerate application software development.
Internal Radio Antennas	No external connections with each radio having an individual antenna.
Rechargeable Battery Pack	Easily recharge the battery via USB Micro-B connector.
Mounting Tabs	Enclosure with two integrated tabs for easy installation.
Integrated Debug Interface	Ease of software development using the Wireless Sensor Development System.
Nano-Sim Card Holder	Easy installation of preferred cellular provider SIM card.
Power Switch	WSE can be turned on and off as needed.
Push Button	User defined operation.

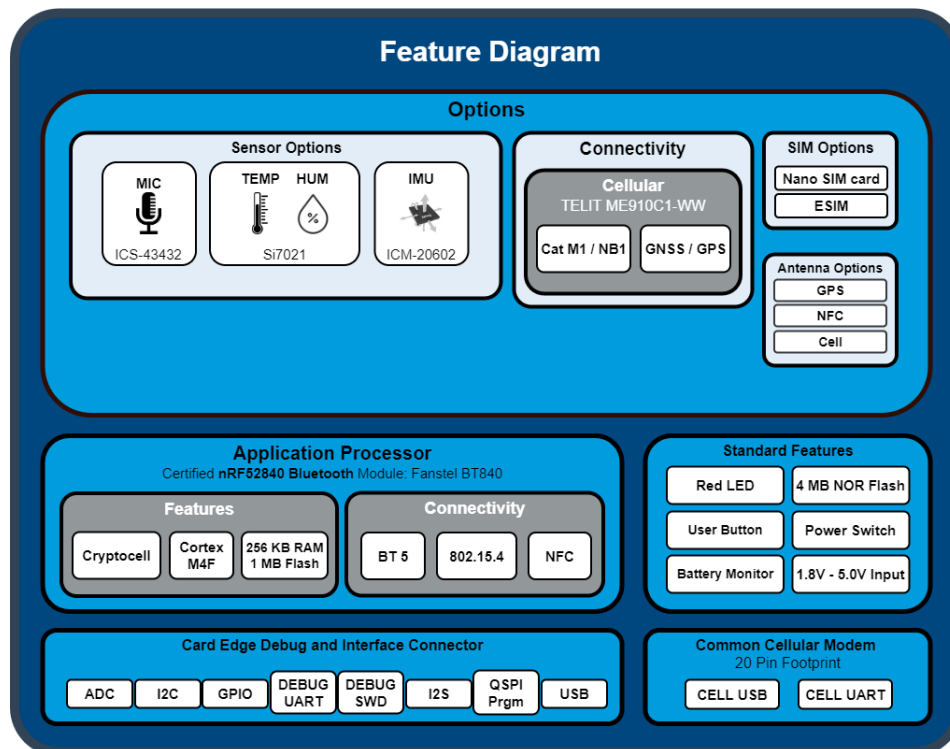

Wireless Sensor Endpoint

Sensor Connectivity Solution

General Specifications

Parameter	Specification
Operating Temperature	-20°C to +60°C
Charging Temperature	0°C to +45°C
Storage Temperature	-20°C to +45°C (1-month) -20°C to +35°C (6-months)
Battery Pack	Li-Ion Polymer, 3.7V @ 4400mAh
Dimensions	60mm x 103mm x 43mm

Sensor Specifications

Device	Specification
Relative Humidity / Temperature	±3% RH (max) 0-80% RH / ±0.4°C (max) -10°C to +85°C
6-Axis IMU Motion Tracking Device	3-axis Accelerometer: ±2/±4/±8/±16 g linear 3-axis Gyroscope: ±250/±500/±1000/±2000 dps
Microphone	Frequency response: 50 Hz to 20 kHz SNR: 65 dBA, Sensitivity -26 dB FS




Wireless Sensor Endpoint

Sensor Connectivity Solution

Component Identification Diagram


Top

Component	Function	COLOR
Telit ME910C1-WW	Cat-M1 / NB-IoT / GNSS	Red
TDK ICM-20602	Accelerometer - Gyro	Yellow
BT840	MCU - BT5 - 802.15.4 - NFC	Green
SI7021	Temp - Humidity	Cyan
TDK ICS-43432	Microphone	Blue
Winbond	4MB QSPI NOR Flash	Magenta
RED LED	Indicator	Pink

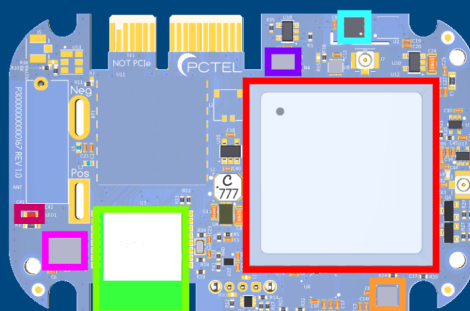

Bottom

Component	Function	COLOR
Nano-SIM Holder	Size 4FF	Red
eSIM	Embedded SIM IC	Orange
Push Button	User button	Yellow
Power Switch	Slide Switch	Green
Battery Connector	JST	Blue
Modem Connector	Common Footprint for Cellular	Cyan

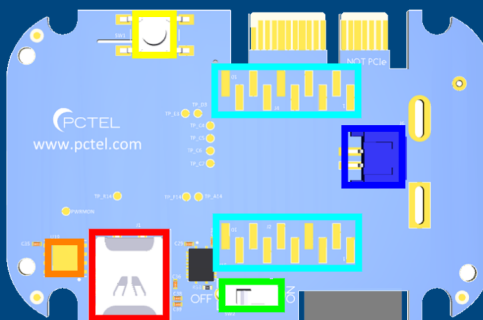

CONTACT US

For more information about
this product contact your
sales representative or visit
> pctel.com/industrial-iot-devices

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology solutions, including purpose-built Industrial IoT devices, antenna systems, and test and measurement products. Trusted by our customers for over 25 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.

Product Usage

THE PRODUCTS ARE NOT DESIGNED, MANUFACTURED, OR INTENDED FOR USE, ALONE OR WITH OTHER PRODUCTS, IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE OF THE PRODUCTS AND/OR IN WHICH A MALFUNCTION OR A FAILURE OF THE PRODUCTS COULD LEAD TO DEATH, PERSONAL INJURY, OR SERIOUS PHYSICAL OR ENVIRONMENTAL DAMAGE, INCLUDING BUT NOT LIMITED TO (A) SURGICALLY IMPLANTED DEVICES, LIFE SUPPORT MACHINES, LIFE PRESERVING MEDICAL DEVICES OR SYSTEMS, OTHER MEDICAL AND SURGICAL APPLICATIONS, OR ANY DEVICES, MACHINES, SYSTEMS, PRODUCTS, OR PROCESSES REQUIRING APPROVAL, TESTING OR CERTIFICATION BY THE U.S. FOOD AND DRUG ADMINISTRATION OR A SIMILAR GOVERNMENTAL ENTITY; (B) AIR TRAFFIC CONTROL OR AIRCRAFT SYSTEMS; (C) CONTROL EQUIPMENT FOR NUCLEAR OR OTHER POWER GENERATION FACILITIES; OR (D) MISSILE, NUCLEAR, BIOLOGICAL, OR CHEMICAL WEAPONS, OR OTHER MILITARY APPLICATIONS (EACH A **"PROHIBITED USE"**).

ANY AND ALL PROHIBITED USE OF THE PRODUCTS IS STRICTLY PROHIBITED, AS IS ANY SALE OR RESALE OF THE PRODUCTS FOR A PROHIBITED USE. PCTEL SHALL HAVE NO LIABILITY FOR ANY USE OF THE PRODUCTS IN ANY MANNER FOR, OR IN CONNECTION WITH, A PROHIBITED USE. ANY SUCH USE SHALL VOID ANY WARRANTIES AND INDEMNITIES PROVIDED BY PCTEL, AS WELL AS ALL OTHER OBLIGATIONS OF PCTEL, INCLUDING, WITHOUT LIMITATION, WITH RESPECT TO SUPPORT. PCTEL SHALL NOT BE DEEMED TO HAVE CONSENTED TO OR APPROVED ANY PROHIBITED USE BY PROVIDING WARRANTY, SUPPORT, OR ANY OTHER SERVICE. ANY PARTY USING THE PRODUCTS IN A PROHIBITED USE SHALL INDEMNIFY AND HOLD HARMLESS PCTEL FROM ANY CLAIMS, LIABILITIES, AND EXPENSES ARISING IN CONNECTION WITH SUCH PROHIBITED USE.



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com

Wireless Sensor Endpoint

Sensor Connectivity Solution

WSE-1310



Connectivity

- Cellular Cat M1/NB-IoT
- Bluetooth® 5
- NFC
- 802.15.4

Features

- Cortex M4F 32-bit application processor with 1MB flash memory / 256K RAM
- 4MB external flash memory
- GPS receiver included in cellular radio
- LED indicator
- Lithium-Ion Polymer battery pack

Sensors

- 6-axis Inertial Measurement Unit
- Gas, Air Quality, Pressure, Temperature and Humidity
- Microphone





Wireless Sensor Endpoint

Sensor Connectivity Solution

The PCTEL® Wireless Sensor Endpoint (WSE) family are versatile Industrial IoT products that offer multiple radio connectivity options including cellular, Bluetooth® 5, NFC as well as 802.15.4 support.

In addition to several radios, the PCTEL WSE family includes several sensors to monitor a variety of physical conditions. These sensors can detect air quality, acceleration, angular rate of change, and sound.

The PCTEL WSE is powered by a high capacity Lithium-Ion Polymer battery pack. The enclosure also has two mounting tabs for easy installation.




Wireless Sensor Endpoint

Sensor Connectivity Solution

Features and Benefits

Feature	Benefit
ARM Mbed Enabled	Faster time to market leveraging ARM Mbed OS to accelerate application software development.
Internal Radio Antennas	No external connections with each radio having an individual antenna.
Rechargeable Battery Pack	Easily recharge the battery via USB Micro-B connector.
Mounting Tabs	Enclosure with two integrated tabs for easy installation.
Integrated Debug Interface	Ease of software development using the Wireless Sensor Development System.
Nano-Sim Card Holder	Easy installation of preferred cellular provider SIM card.
Power Switch	WSE can be turned on and off as needed.
Push Button	User defined operation.

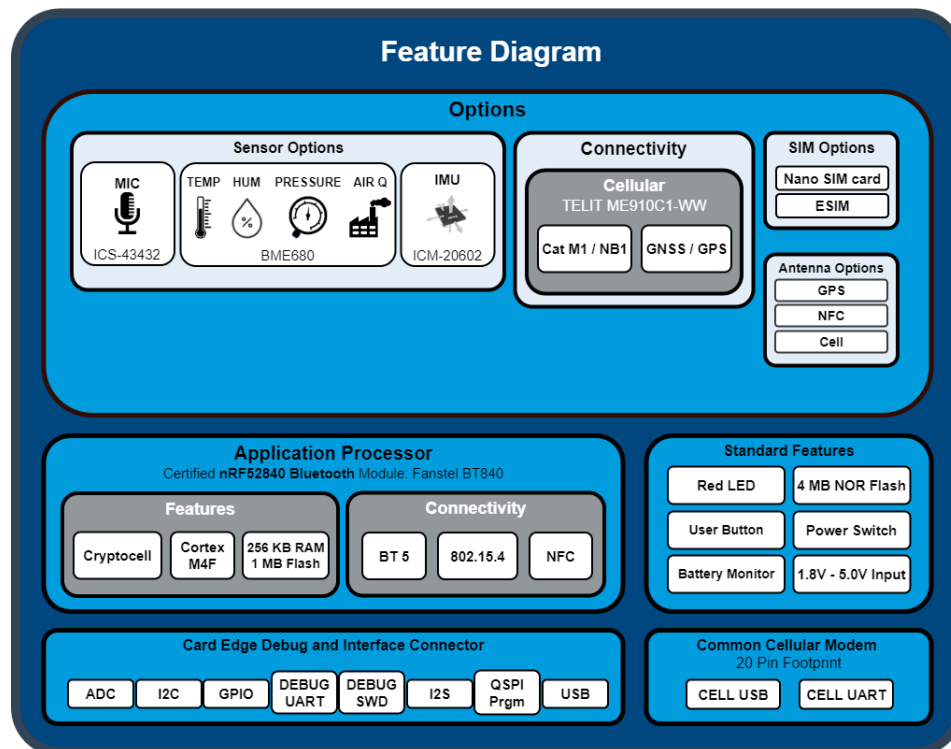

Wireless Sensor Endpoint

Sensor Connectivity Solution

General Specifications

Parameter	Specification
Operating Temperature	-20°C to +60°C
Charging Temperature	0°C to +45°C
Storage Temperature	-20°C to +45°C (1-month) -20°C to +35°C (6-months)
Battery Pack	Li-Ion Polymer, 3.7V @ 4400mAh
Dimensions	60mm x 103mm x 43mm

Sensor Specifications

Device	Specification
6-Axis IMU Motion Tracking Device	3-axis Accelerometer: $\pm 2/\pm 4/\pm 8/\pm 16$ g linear 3-axis Gyroscope: $\pm 250/\pm 500/\pm 1000/\pm 2000$ dps
Microphone	Frequency response: 50 Hz to 20 kHz SNR: 65 dBA, Sensitivity -26 dB FS
Environmental Gas / Air Quality	Gas (VOC): 20% tolerance; 5% accuracy
	Pressure: 300 to 1100 hPa (± 0.6 hPa)
	Humidity: 10% to 90% RH ($\pm 3\%$) at 0°C to +65°C
	Temperature: -40°C to +85°C ($\pm 1^\circ\text{C}$), 25°C ($\pm 0.5^\circ\text{C}$)
	Air Quality Score: 0 to 500 ($\pm 15\%$)




Wireless Sensor Endpoint

Sensor Connectivity Solution

Component Identification Diagram


Top

Component	Function	COLOR
Telit ME910C1-WW	Cat-M1 / NB-IoT / GNSS	Red
TDK ICM-20602	Accelerometer - Gyro	Orange
BT840	MCU - BT5 - 802.15.4 - NFC	Yellow
BOSCH BME680	Temp - Hum - Pres - Air Q	Green
		Cyan
		Blue
TDK ICS-43432	Microphone	Purple
Winbond	4MB QSPI NOR Flash	Magenta
RED LED	Indicator	Red

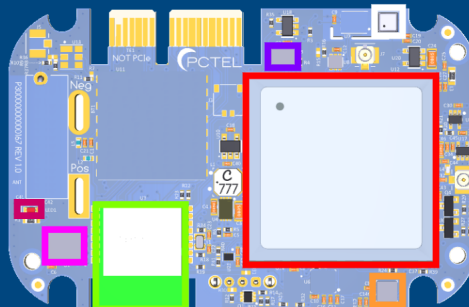

Bottom

Component	Function	COLOR
Nano-SIM Holder	Size 4FF	Red
eSIM	Embedded SIM IC	Orange
Push Button	User button	Yellow
Power Switch	Slide Switch	Green
Battery Connector	JST	Blue
Modem Connector	Common Footprint for Cellular	Cyan

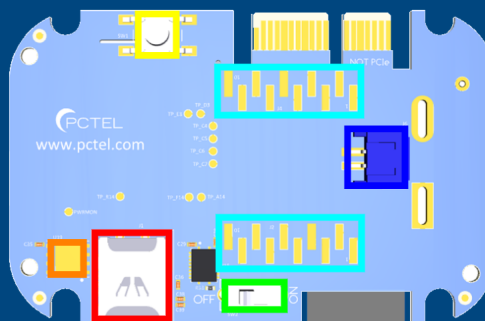

CONTACT US

For more information about
this product contact your
sales representative or visit
> pctel.com/industrial-iot-devices

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology solutions, including purpose-built Industrial IoT devices, antenna systems, and test and measurement products. Trusted by our customers for over 25 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.

Product Usage

THE PRODUCTS ARE NOT DESIGNED, MANUFACTURED, OR INTENDED FOR USE, ALONE OR WITH OTHER PRODUCTS, IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE OF THE PRODUCTS AND/OR IN WHICH A MALFUNCTION OR A FAILURE OF THE PRODUCTS COULD LEAD TO DEATH, PERSONAL INJURY, OR SERIOUS PHYSICAL OR ENVIRONMENTAL DAMAGE, INCLUDING BUT NOT LIMITED TO (A) SURGICALLY IMPLANTED DEVICES, LIFE SUPPORT MACHINES, LIFE PRESERVING MEDICAL DEVICES OR SYSTEMS, OTHER MEDICAL AND SURGICAL APPLICATIONS, OR ANY DEVICES, MACHINES, SYSTEMS, PRODUCTS, OR PROCESSES REQUIRING APPROVAL, TESTING OR CERTIFICATION BY THE U.S. FOOD AND DRUG ADMINISTRATION OR A SIMILAR GOVERNMENTAL ENTITY; (B) AIR TRAFFIC CONTROL OR AIRCRAFT SYSTEMS; (C) CONTROL EQUIPMENT FOR NUCLEAR OR OTHER POWER GENERATION FACILITIES; OR (D) MISSILE, NUCLEAR, BIOLOGICAL, OR CHEMICAL WEAPONS, OR OTHER MILITARY APPLICATIONS (EACH A **"PROHIBITED USE"**).

ANY AND ALL PROHIBITED USE OF THE PRODUCTS IS STRICTLY PROHIBITED, AS IS ANY SALE OR RESALE OF THE PRODUCTS FOR A PROHIBITED USE. PCTEL SHALL HAVE NO LIABILITY FOR ANY USE OF THE PRODUCTS IN ANY MANNER FOR, OR IN CONNECTION WITH, A PROHIBITED USE. ANY SUCH USE SHALL VOID ANY WARRANTIES AND INDEMNITIES PROVIDED BY PCTEL, AS WELL AS ALL OTHER OBLIGATIONS OF PCTEL, INCLUDING, WITHOUT LIMITATION, WITH RESPECT TO SUPPORT. PCTEL SHALL NOT BE DEEMED TO HAVE CONSENTED TO OR APPROVED ANY PROHIBITED USE BY PROVIDING WARRANTY, SUPPORT, OR ANY OTHER SERVICE. ANY PARTY USING THE PRODUCTS IN A PROHIBITED USE SHALL INDEMNIFY AND HOLD HARMLESS PCTEL FROM ANY CLAIMS, LIABILITIES, AND EXPENSES ARISING IN CONNECTION WITH SUCH PROHIBITED USE.



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com