

N-SMA Between Series Adapters

Performance Features

Nominal Impedance: 50ohm

Frequency Range: DC-18GHz

Durability: 500cycles

Operating Temperature: -55°C ~ +165°C


Materials/Finishes

Housing: Type 303 Stainless Steel – Polished & Passivated


Center Contact: Beryllium Copper Plated Gold
(MIL-G-45204)

Insulators: PEI & PTFE


N/SMA Interfaces: MIL-STD-348A

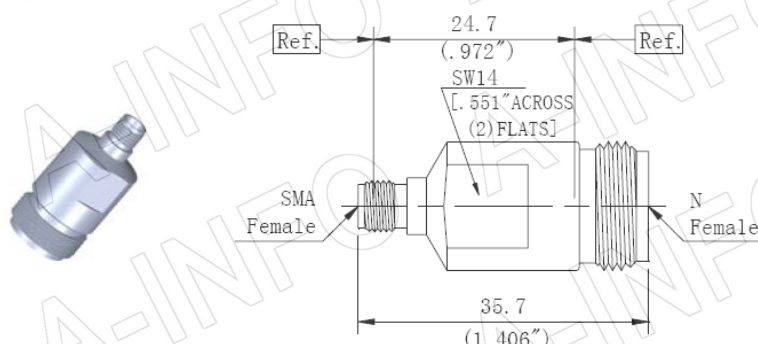


P/N	HPA125-01
Description	N/Female-SMA/Female
VSWR	DC-18GHz...1.15:1 max

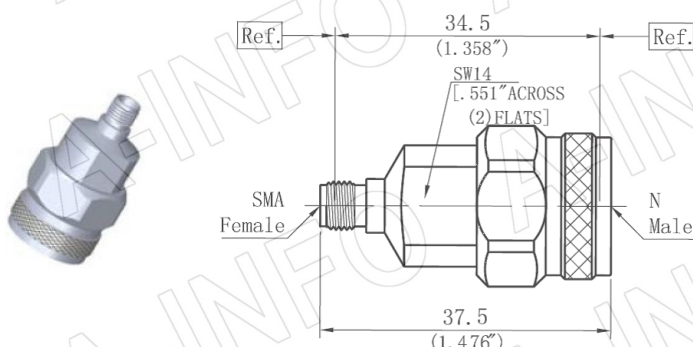


P/N	HPA125-02
Description	N/Male-SMA/Female
VSWR	DC-18GHz...1.15:1 max

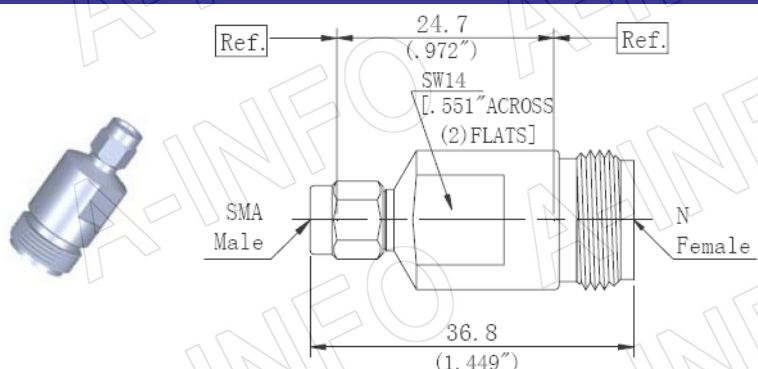


P/N	HPA125-03
Description	N/Female-SMA/Male
VSWR	DC-18GHz...1.15:1 max

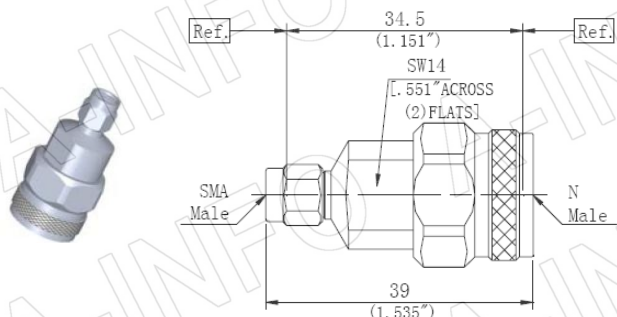


P/N	HPA125-04
Description	N/Male-SMA/Male
VSWR	DC-18GHz...1.15:1 max

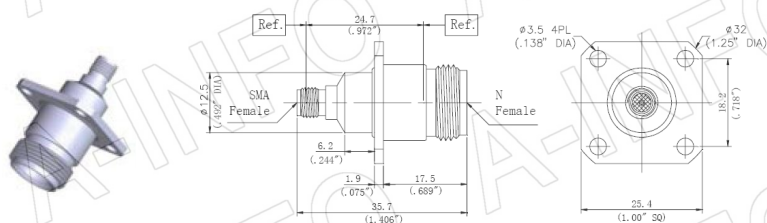

P/N	HPA125-05
Description	N/Female-SMA/Female
VSWR	DC-18GHz...1.15:1 max

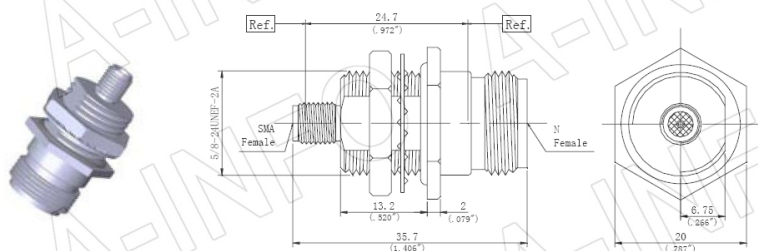

P/N	HPA125-06
Description	N/Female-SMA/Female
VSWR	DC-18GHz...1.15:1 max

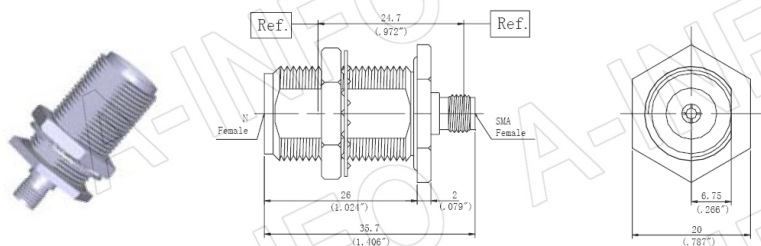

P/N	HPA125-07
Description	N/Female-SMA/Female
VSWR	DC-18GHz...1.15:1 max

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com