

NPD1744

17" IP65 Sunlight Readable Marine Display

NAVPIXEL NPD1744, the high-performance, rugged touch monitor, is specially engineered to survive from the most demanding working environment. Housed in a milled billet aluminum case, the slim-profile NAVPIXEL NPD1744 is light weight and watertight. The front-mounted sunlight readable touch screen makes the industrial rugged monitor vividly and user-friendly. In addition, the high power efficiency and low heat design guarantee the stability and longevity required for mission critical deployment.

Features:

- 1000 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Picture In Picture Function
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Resistive Touch Support
- IP65 Facial Waterproof
- 9-36V DC Input

Application:

- Marine




Specifications

V1

Model Number	NPD1744
LCD Display	
Backlight	17" LED Backlight
Active Display Area	337.92 x 270.33mm
Brightness	1000 cd/m ²
Resolution	1280x1024(SXGA)
Contrast Ratio	800:1
Pixel Pitch (mm)	0.264(H) x 0.264 (V)
Viewing Angle	160 (H), 160(V)
Display Color	16.7M
Response Time	5ms
Inputs	VGaX2, DVIX2, Compositex3, RS232x1, USBx1
PIP Support	3 Stages (child, split & wide screen)
Mechanical	
IP Rating	Fascial waterproof to IP65 standards when console mounted.
Construction	Rugged Aluminum Alloy Chassis
Mounting	Panel (Flush) mount, VESA mount
Dimension (mm)	384(W)x348.1(H)x57.8(D)
Net Weight	4.5kg
Power	
Voltage	DC Input Voltage: DC 9~36V
Power Consumption	50W
Environmental	
Operating Temperature	-10°C~50°C
Non-Operating Temperature	-20°C~70°C
Certification	Designed to meet CE / FCC Class A
Marine Type Approval	Marine BV certification, comply with IACS-E10 & IEC 60945

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.

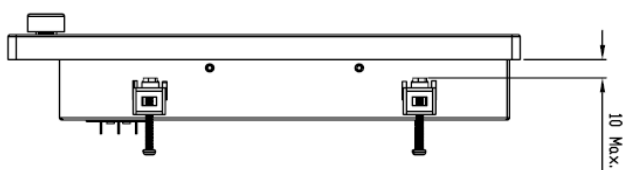

Back View

REV	ECN NO.	DESCRIPTION	SIGN	DATE
Δ	-	Design drawing		2010/01/18

APPROVED	CHECKED	DESIGNED	LEVEL				GENERAL TOLERANCE ±	MATERIAL	④ CRITICAL DIMENSION	DRAWING REVISION AND
			DIM.							
			1	2	3	SELF				
			0 - 4	0.1	0.1	0.5	LEVEL	FINISH		
			4 - 14	0.1	0.2	0.5				
			14 - 63	0.15	0.25	0.2				
			63 - 250	0.15	0.3	0.25				
			250 - 600	0.2	0.5	0.4				
			600 - 1000	0.3	0.6	0.6				
		Jetty					2			
								Date	2010/05/20	
DESCRIPTION										
NavPixel										
								SIZE	SUF	REV
								A4	2-2	V1
								UtenMax		
								Electronic Inc.		

TITLE		Cutout Dimension		ORIGINAL MODEL
UNIT	SCALE	WEIGHT	ANGLE GENERAL TOLERANCE	3rd Angle
mm	1:4	—	—	
DRAWING NO. PART NO.				
1				
DESCRIPTION				
NavPixel				
Lith/Ex Electronic Inc.		SIZE	SHR	REV
		A4	2-2	V1



Ordering Information

Part Number	Description
NPD1744-EGAW-J01	17",1000nits,SXGA,AR glass.LID17B01,AD5827,WP,AOT,V01
NPD1744-EGAW-J011	17",1000nits,SXGA,AR glass.LID17B01,AD5827,WP,AOT.with adaptor,V01
NPD1744-ETAW-J01	17" ,1000nits, SXGA,Touch-usb.Transparency:80,LID17B01.AD5827,WP,AOT,V01
NPD1744-ETAW-J011	17",1000nits,SXGA,Touch-usb.(Transparency:80%),LID17B01.AD5827,WP,AOT,with adaptor.V01

Optional Accessories

Part Number	Description
980000300010	SET,OTHER,CD for User.Menu&Touch driver(NPD series)
810650005110	CABLE,POWER,DC,5000mm,TER.MINAL TO OPEN,14AWG*2C+BRA.ID,COOL GRAY 7C PVC JACKET,P
810130001000	CABLE.VGA.3000mm.D-SUB15P MALE.BLUE TO D-SUB 15P MALE BLUE.BLACK.P
321189155501	Print,Menu,User,NPD.1555,V0,series,P
321179174401	Print,Menu,Install,NPD,1744,V0.Flush mount template,P
112615315401 x (4)	Metal,SPCC,NPS,1531,Lock,V0,P
214032121101 x (4)	Screw,M4,32mm,Round,Ni,P
460100002101 x (4)	Fixture,other,MP-4,V0,P
980000560010 (Optional)	SET,OTHER,ADAPTER REWORK.60W KPA-060F WITH Y TYPE.TERMINAL,P
810618301010 (Optional)	CABLE.POWER.AC.1830mm USA type
810618301090 (Optional)	CABLE,POWER,AC,1830mm Europe type
810618301050 (Optional)	CABLE.POWER.AC.1830mm UK type
810618301170 (Optional)	CABLE.POWER,AC,1830mm Australia type
810618301030 (Optional)	CABLE.POWER.AC.1830mm Japan type