


TS Type < for Stratum 3 > 7.0 x 5.0 mm SMD Stratum 3 Voltage Controlled Temperature Compensated Crystal Oscillator

FEATURE

- Typical 7.0 x 5.0 x 1.9 mm ceramic SMD package.
- Stratum 3 (Overall ± 4.6 ppm including 20 years aging.)
- CMOS and Clipped Sine wave (without DC-cut capacitor) output optional.


TYPICAL APPLICATION

- Base Stations
- Stratum 3




RoHS Compliant

DIMENSION (mm)

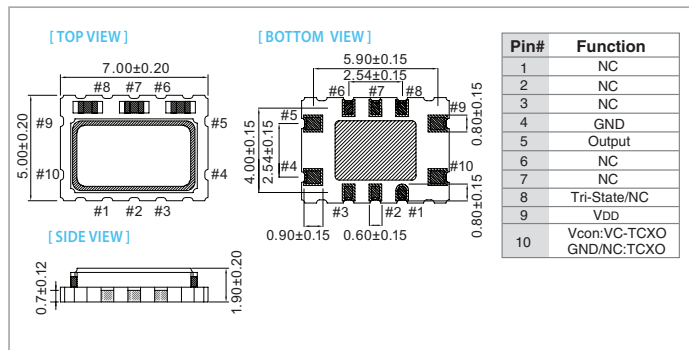

SOLDER PAD LAYOUT (mm)

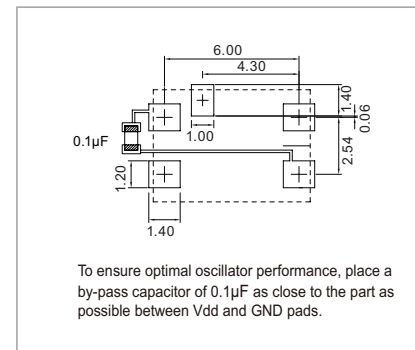

ELECTRICAL SPECIFICATION

Parameter		2.5V		3.3V		Unit
		Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)		VDD-5%	VDD+5%	VDD-5%	VDD+5%	V
Frequency Range		5	52	5	52	MHz
Standard Frequency (for CMOS)		8.192, 10, 12.8, 20				
Standard Frequency (for Clipped sine Wave)		8.192, 10, 12.8, 16.384, 19.2, 19.44, 20, 25, 26				
Operating Temp. Range		-20 ~ 70 -40 ~ 85				°C
Frequency Stability (Overall, 20 Years)*		—	±4.6	—	±4.6	ppm
Frequency Stability Vs Temp. Range		—	±0.28	—	±0.28	ppm
Holdover Stability +		—	±0.37	—	±0.37	ppm
Supply Current (CMOS output)		—	6.0	—	6.0	mA
Supply Current (Clipped Sine Wave)		—	3.5	—	3.5	
Output Level (CMOS)						V
Output High (Logic"1")		90%VDD	—	90%VDD	—	
Output Low (Logic"0")		—	10%VDD	—	10%VDD	
Duty		45	55	45	55	
Output Level (Clipped Sine Wave)		0.8	—	0.8	—	Vp-p
Load (CMOS)		15pF		15pF		
Load (Clipped Sine Wave)		10 KΩ // 10pF		10 KΩ // 10pF		
Control Voltage Range (VCTCXO)		0.5	2.5	0.5	2.5	V
Pulling Range (VCTCXO)		±5.0	—	±5.0	—	ppm
Vc Input Impedance (VCTCXO)		100	—	100	—	kΩ
Phase Noise @ 10 MHz	100 Hz	-120		-120		dBc / Hz
	1 kHz	-140		-140		
	10 kHz	-148		-148		
Start Time		—	5	—	5	mSec
Tri-State						V
Disable		—	1.5	—	0.99	
Enable		3.5	—	2.31	—	
Storage Temp. Range		-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

* Including calibration @ 25°C, supply voltage VDD $\pm 5\%$, load 15pF $\pm 5\%$, reflow soldering, 20 years aging and frequency stability over temperature.

+ Including 24hours aging, supply voltage VDD $\pm 5\%$ and frequency stability over temperature.

Note: not all combination of options are available. Other specifications may be available upon request.