


特点 Features

- 体积小(20.6x10.2x15.7mm), 适用于密集安装, 10A 切换容量。
Small size (20.6x10.2x15.7mm) with 10A switching capability for high density PCB mounting.
- 耐压可达 4KV (线圈触点间), 耐 8KV 浪涌电压。
IP/OP 4KV, Withstand surge voltage of 8KV.
- 适用于空调、冰箱、微波炉、烤箱。
Apply to air conditioner, refrigerator, microwave oven, stove etc.
- 可提供满足 IEC60335-1 的产品。
IEC60335-1 compliant product is available.
- 可提供满足 IEC60079-15 的产品。
IEC60079-15 compliant product is available.

安规认证 Safety certificate

UL、C-UL 认证号 (File No.) : E190598
 CQC 认证号 (File No.) : CQC04001009429
 VDE 认证号 (File No.) : 40035912

触点参数 Contact Data

型号 Type	SJE-D(E,L)H	SJE-D(E,L)MH
额定负载 (阻性负载) Rated load (Resistive load)	NO/NC:10A/5A 277VAC	10A 277VAC
最大切换电流 Max. switching current	10A	10A
最大切换电压 Max. switching voltage	277VAC	277VAC
最大切换功率 Max. switching power	2,770VA	2,770VA

性能参数 Characteristics

触点材料 Contact material	银合金 Silver alloy
接触电阻 Contact resistance	100mΩ Max. (at 1A 6VDC)
吸合时间 (额定电压) Operate time (at rated coil voltage)	10ms Max. (不加二极管 No diode)
释放时间(额定电压) Release time (at rated coil voltage)	4ms Max. (不加二极管 No diode)
绝缘电阻 Insulation resistance	Min. 1,000MΩ (at 500VDC)

介质耐压 Dielectric strength	触点与触点间 Between open contacts : 1000VAC, 50/60Hz for 1min.	
	触点与线圈间 Between coil and contact: 4000VAC, 50/60Hz for 1min.	
抗振动 Vibration resistance	耐久 Destructive	10 ~ 55Hz , 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5mm
	误动作 Functional	10 ~ 55Hz , 双振幅 1.5 mm 10 ~ 55Hz, at double amplitude of 1.5mm
抗冲击 Shock resistance	耐久 Destructive	100G Min.
	误动作 Functional	10G Min.
寿命 Endurance	机械寿命(每小时 10,800 次, 室温) Mechanical endurance (10,800ops./h)	10,000,000 次 10,000,000(at room temperature)
	电气寿命(每小时 360 次, 室温) Electrical endurance (360ops./h)	100,000 次 100,000(at room temperature)
环境温度 Ambient temperature	-40°C ~ +105°C (不冷凝 No condensation)	
重量 Weight	约 6.5g Approx. 6.5g	

线圈参数 Coil Data (at 20°C)

额定电压 (VDC) Nominal voltage (VDC)	额定电流 ±10%(mA) Nominal operating current ± 10%(mA)	线圈电阻 ±10% (Ω) Coil resistance ±10%(Ω)	最大连续外加电压 Max. allowable voltage	吸合电压 (Max.) Operate voltage (Max.)	释放电压 (Min.) Release voltage (Min.)	额定功率 Nominal operating power
3	150.00	20	额定电压的 130% 130% of nominal voltage	额定电压的 75% 75% of nominal voltage	额定电压的 5% 5% of nominal voltage	约 0.45W Approx. 0.45W
5	90.00	55				
6	75.00	80				
9	50.00	180				
12	37.50	320				
18	25.00	720				
24	18.75	1,280				
48	9.38	5,120	额定电压的 130% 130% of nominal Voltage	额定电压的 75% 75% of nominal voltage	额定电压的 5% 5% of nominal voltage	约 0.4W Approx. 0.4W
3	133.33	22.5				
5	80.00	62.5				
6	66.67	90				
9	44.44	202.5				
12	33.33	360				
18	22.22	810				
24	16.67	1,440				
48	8.33	5,760				

额定电压 (VDC) Nominal voltage (VDC)	额定电流 ±10%(mA) Nominal operating current ± 10%(mA)	线圈电阻 ±10% (Ω) Coil resistance ±10%(Ω)	最大连续外加电压 Max. allowable voltage	吸合电压 (Max.) Operate voltage (Max.)	释放电压 (Min.) Release voltage (Min.)	额定功率 Nominal operating power
3	66.67	45	额定电压的 130% 130% of nominal Voltage	额定电压的 75% (Form C 80%) 75% of nominal voltage (80% of nominal voltage with Form C)	额定电压的 5% 5% of nominal voltage	约 0.2W Approx. 0.2W
5	40.00	125				
6	33.33	180				
9	22.22	405				
12	16.67	720				
18	11.11	1,620				
24	8.33	2,880				
48	4.17	11,520				

上述值为初始值，请勿在产品上连续施加最大电压 > 10min，以免线圈过度发热。

The data shown above are initial values. Do not apply maximum allowable voltage on coil for more than 10 minutes to avoid overheating of the coil.

安规认证负载（注：更多详细的认证负载，参考安规证书）

Safety Certificate Ratings (Note: More details of approved ratings, please refer to the safety certificates)

认证类型 Certificates	CQC	VDE	UL/CUL
认证号码 File No.	CQC04001009429	40035912	E190598
认证负载 Approved Ratings	From A: 10A 277VAC From C: 10A 277VAC, NO 5A 277VAC, NC	From A: 10A 277VAC From C: 10A 277VAC, NO 5A 277VAC, NC	SJE - D/L/E: Form A: 10A 277VAC, Resistive&General use, Form C: 10A 277VAC, Resistive/General Use, NO 5A 277VAC, Resistive/General Use, NC

(1) 上述未注明温度的负载，均指环境温度为室温

All values unspecified are at room temperature

(2) 以上仅列出了该产品认证的部分负载，每个负载的详细测试条件不同，因此电寿命次数不一样。如需了解详细情况，请联系三友。

Only typical ratings are listed above and the endurance differ in each load. Other specific load information are available upon request.

(3) 对于塑封式、防水式产品试验时，应打开外壳的透气孔。

For sealed type testing, please open the ventilation hole in the case before test.

订货标记 Ordering Information

型号命名规则 Nomenclature

SJE -S -1 12 D M H 3 -F -XX

特殊参数 Special Parameter :

无-标准型, 字母或数字-特殊要求

Nil-Standard type

Letter or number-Special requirement

绝缘等级 Insulation System : 无 Nil - 普通型 Standard,
B - Class B,
F - Class F

触点材质 Contact Material: 无 Nil - AgSnO₂, 2-AgNi,
3 - AgSnO₂ 三复合动点 For contact 3 Compounds(Form C),
4 - AgNi 三复合动点 For contact 3 Compounds(Form C)

负载能力 Load Capacity: 无 Nil - 普通型 Standard, H-10A

触点形式 Contact Form : Nil - Form C , B - Form B , M - Form A

线圈功耗 Coil Power: D-0.45W, E-0.4W , L-0.2W

线圈电压 Rated Coil Voltage(VDC) :
03 , 05 , 06 , 09 , 12 , 15 , 18 , 24 , 48

触点组数 Number of Poles : 1-1Pole

封装形式 Protective Construction

S-塑封式 Flux-proof

SH-防水式 Sealed type washable

基本型号 Type : SJE

(1) 塑封式不能在污染环境 (含有 H₂S、SO₂、NO₂、粉尘等污染物) 中使用。

Flux-proof relays can not be used in the environment with pollutants like H₂S, SO₂, NO₂, dust, etc.

(2) 塑封式装入 PCB 焊接后, 不能进行整体清洗或表面处理。



Water cleaning or surface process is not suggested after the flux-proof relays are assembled on PCB.

(3) 客户特殊要求 (XX) , 由我司评估后, 按特性符号标识。



Customized special suffix is available after being evaluated by Sanyou

外形尺寸图、接线图、安装孔位图 (单位: mm)


Outline dimension, wiring diagram, PCB layout (Unit: mm)

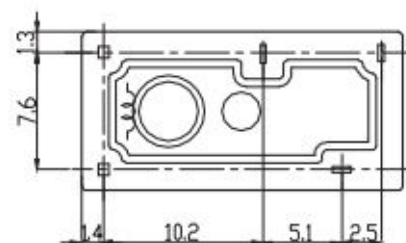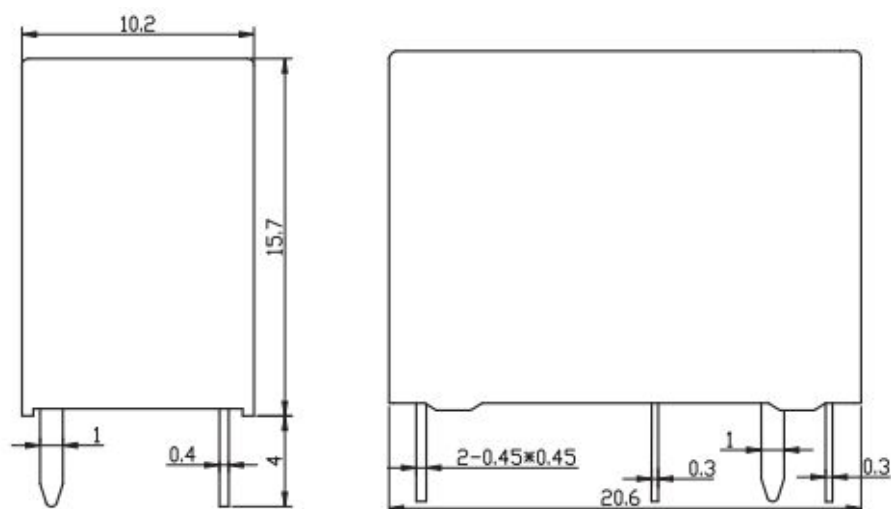


底视图



接线图(底视图)

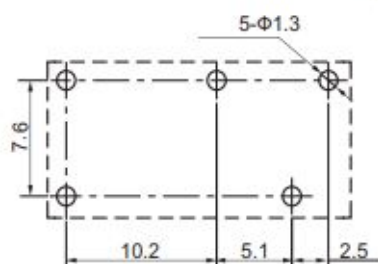

1c

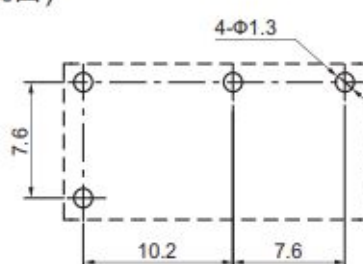

1a

安装孔位图(底视图)

未标注尺寸公差

In case of no tolerance shown on outline dimension

If dimension < 1 mm, tolerance : $\pm 0.2\text{mm}$ If dimension 1~5mm, tolerance : $\pm 0.3\text{mm}$ If dimension > 5mm, tolerance : $\pm 0.4\text{mm}$

注 Note :

1.引出脚尺寸为预焊前尺寸


The dimension of pin is the size before tinning

2.安装孔尺寸公差 : $\pm 0.1\text{mm}$ Tolerance of PCB layout : $\pm 0.1\text{ mm. view}$

典型用途 Typical Applications

- 家用设备
Home appliances
- 办公设备
Office equipment
- 音箱设备
Audio equipment
- 汽车、空调等
Car, air tione, etc

性能曲线图 Characteristic Curves

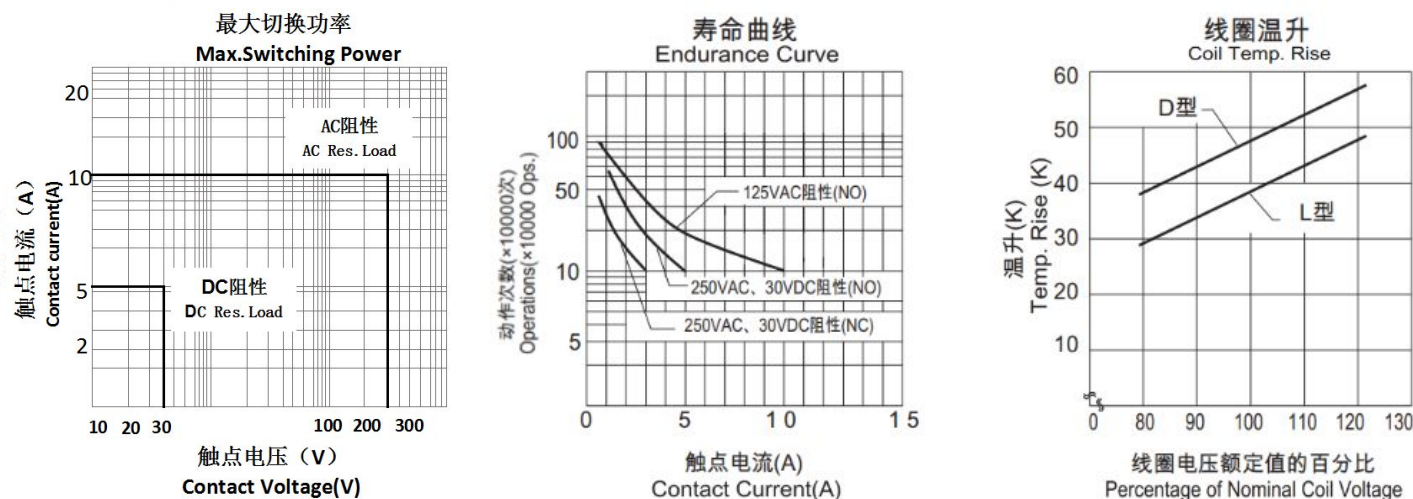

声明：本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。

Disclaimer: The specification is for reference only. Specifications are subject to change without prior notice.

对三友而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件选择与之相配的产品。对于密封继电器在安装清洗后，使用前请打开外壳上的透气孔。若有疑问，请与三友联系获取更多的技术支持，但产品选型责任仅由客户负责。

We could not evaluate all the performance and all the parameters for every possible application. Thus users should in a right position to choose suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used only.