

TW Type High Precision 5.0 x 3.2 mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator


FEATURE

- Typical 5.0 x 3.2 x 1.85 mm ceramic SMD package.
- $\pm 0.28\text{ppm}$, $-40^\circ\text{C} \sim +85^\circ\text{C}$; $\pm 0.05\text{ppm}$, $-10^\circ\text{C} \sim +70^\circ\text{C}$
- CMOS and Clipped Sine wave (without DC-cut capacitor) output optional.


TYPICAL APPLICATION

- Base Stations, Stratum 3
- Femtocell

DIMENSION (mm)

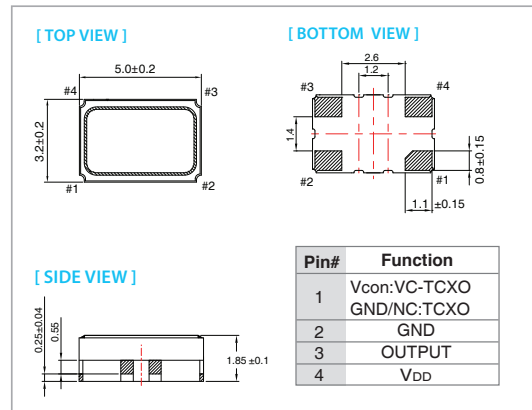

SOLDER PAD LAYOUT (mm)

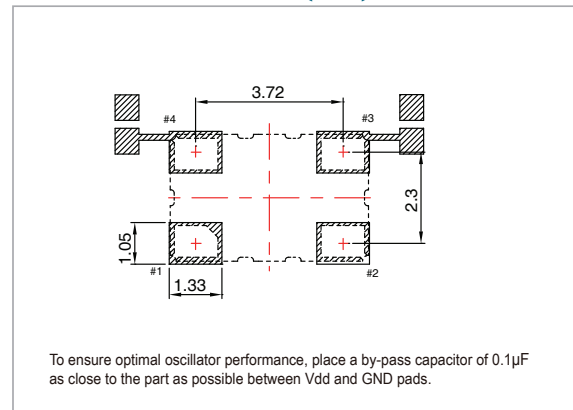

RoHS Compliant

ELECTRICAL SPECIFICATION

Parameter	2.5V		3.3V		Unit
	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-5%	VDD+5%	VDD-5%	VDD+5%	V
Frequency Range	10	52	10	52	MHz
Standard Frequency (for CMOS)	10, 12.8, 13, 19.2, 20, 25, 26, 30.72				MHz
Standard Frequency (for Clipped Sine Wave)	10, 12.8, 13, 19.2, 20, 25, 26, 30.72				MHz
Frequency Tolerance*	—	± 2.0	—	± 2.0	ppm
Frequency Stability					ppm
Vs Supply Voltage ($\pm 5\%$) change	—	± 0.2	—	± 0.2	ppm
Vs Load ($\pm 10\%$) change	—	± 0.2	—	± 0.2	ppm
Vs Aging (@ 1st year)	—	± 1.0	—	± 1.0	ppm
Supply Current (CMOS output)					mA
10 MHz $\geq$ Fo $\geq$ 40 MHz	—	6	—	6	mA
40 MHz $>$ Fo $\geq$ 52 MHz	—	8	—	8	mA
Supply Current (Clipped Sine Wave)	—	5	—	5	mA
Output Level (CMOS)					V
Output High (Logic "1")	90%VDD	—	90%VDD	—	V
Output Low (Logic "0")	—	10%VDD	—	10%VDD	V
Duty	45	55	45	55	%
Output Level (Clipped Sine Wave)	0.8	—	0.8	—	Vp-p
Load (CMOS)	15pF				pF
Load (Clipped Sine Wave)	10 K Ω // 10pF				pF
Control Voltage Range (VCTCXO)	0.5	2.5	0.5	2.5	V
Pulling Range (VCTCXO)	± 5.0	—	± 5.0	—	ppm
Vc Input Impedance (VCTCXO)	100	—	100	—	k Ω
Phase Noise @ 10 MHz					dBc/Hz
100 Hz	-125		-125		dBc/Hz
1 kHz	-145		-145		dBc/Hz
10 kHz	-150		-150		dBc/Hz
Start time	—	5	—	5	mSec
Storage Temp. Range	-55	125	-55	125	$^\circ\text{C}$

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position. *Frequency at 25 $^\circ\text{C}$, 1 hour after reflow.

Frequency Stability vs. Temperature Range

Temp. ($^\circ\text{C}$)	ppm	± 0.05	± 0.1	± 0.2	± 0.28	± 0.5
-10 ~ +70		○	○	○	○	○
-20 ~ +70		×	○	○	○	○
-40 ~ +85		×	×	△	○	○

* ○: Available △: Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.